
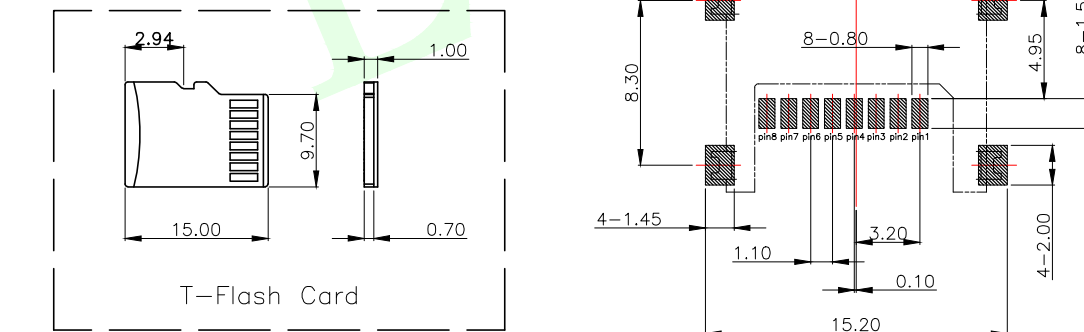
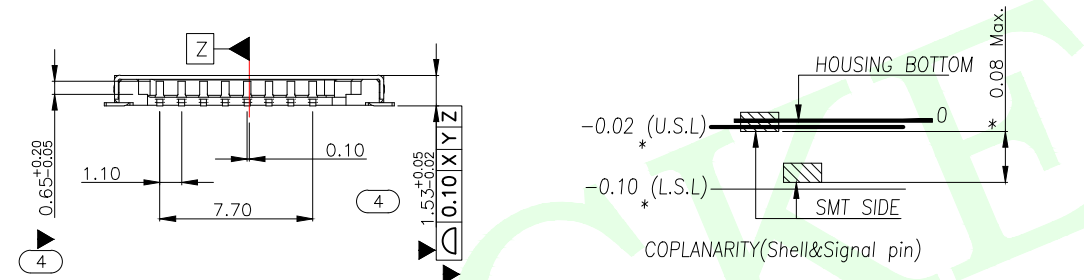


RoHS Compliant

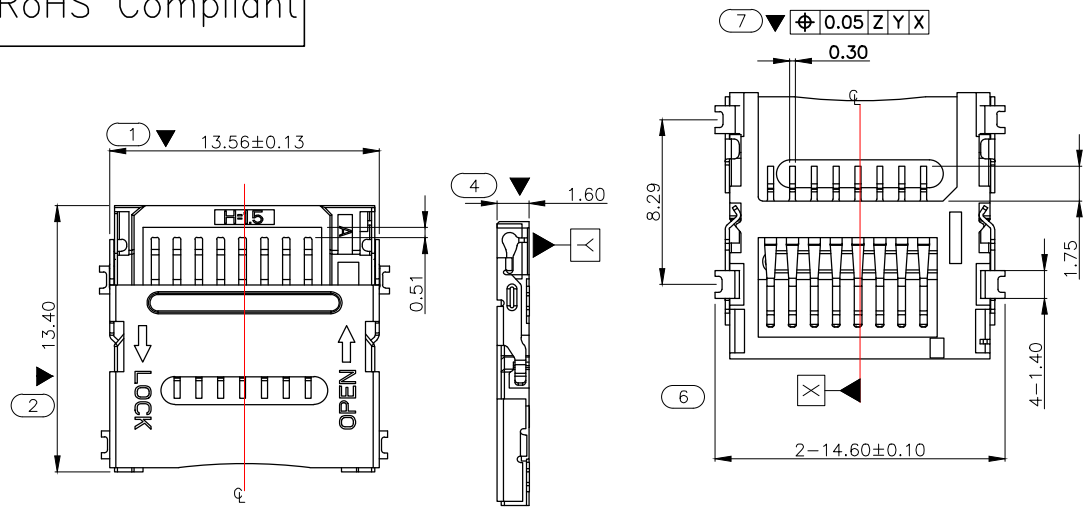

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NOTE:

1.FINISH:

1-1.CONTACT: AU 1U" PLATING ON CONTACT AREA,
100~200U" SN PLATING ON SOLDER TAILS,
50U" NICKEL UNDERPLATING VOER ALL;

1-2.SHELL: NO PLATING;

2.PRODUCT SPECIFICATIONS:

2-1.VOLTAGE RATING: 100V

2-2.CURRENT RATING: 0.5A


2-3.INSULATION RESISTANCE: 1000 MEG.OHM MIN

2-4.CONTACT RESISTANCE: 100 MILL.OHM MAX

2-5.OPERATION TEMPERATURE: -20° TO $+85^{\circ}$

PIN NO.	NAME	YTP	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

产品采购完整示意号: LCK-TF-102H1608-WLG

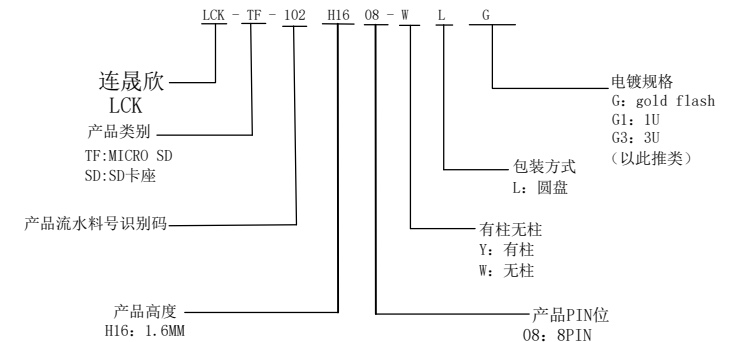

MEASURE POINT:				联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd				
QUADRANT POINT	QP							
TANGENCY POINT	TP							
INTERSECTION POINT	IP							
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN	Andy	DATE	2014.12.24	TITLE: MICRO SD CARD 1.6H掀盖		
X.	±0.25	CHECKED		DATE				
X.x	±0.20	APPROVED		DATE				
X.xx	±0.15	PART NO: LCK-TF-102H1608-WLG				REV: 04	SCALE: 1:1	UNIT: mm
ANGULAR	±3°	DRAWING NO: 102022014				SIZE: A4	SHEET: 1/1	