RoHS Compliant

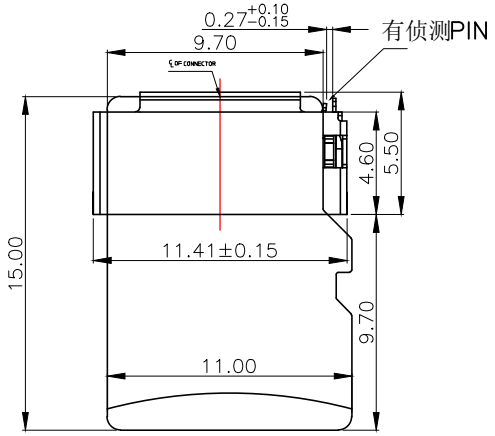

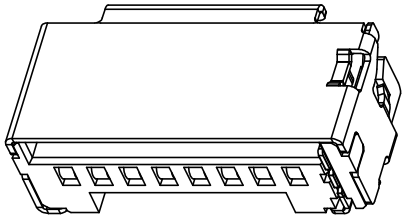

序号	DIM A	DIM B
1	3.0	1.86
2	3.35	2.16
3	3.75	2.56
4	5.20	4.00

-NOTES-
1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:500V RMS.
Insulation resistance:1000M ohms min.
2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:4.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:1500cycles MIN.
3.Environment:
Operating Temperature:-25°to+85°.
4.FINISH:
TERMINAL: GOLD Plated Over NICKEL
Contact area,TIN ON
SOLDER TAIL AREA& TIN
Plated ALL Over NICKEL.
Shell: SPCC WITH NICKEL&GOLD Plated.
5.COLOR:
HOUSING:BLACK.

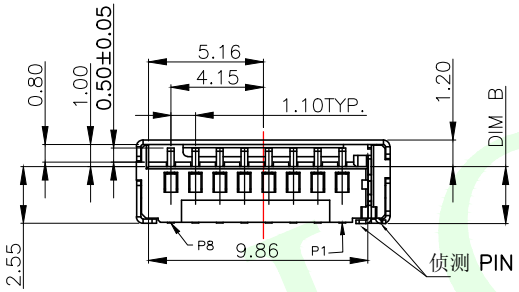

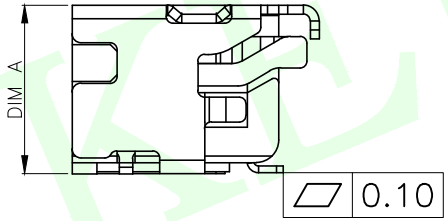

Pin No.	NAME
P1	DAT2
P2	CD/DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1

产品采购完整示意号：LCK-TF-027H30008-YWG

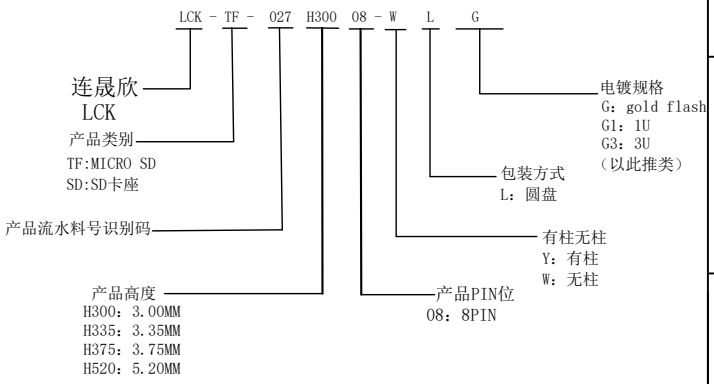

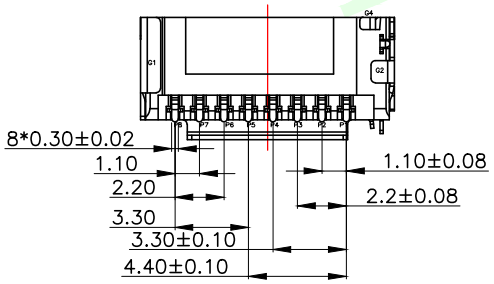

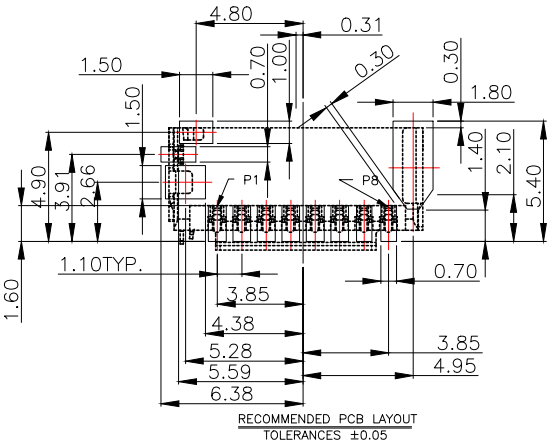

Pin No.	NAME
G1	GND
G2	GND
G3	POL
G4	DET

MEASURE POINT:
QUADRANT POINT QP
TANGERCY POINT TP
INTERSECTION POINT IP

UNLESS OTHERWISE SPECIFIED,TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24
CHECKED		DATE	
APPROVED		DATE	

TITLE: T-FLASH 短体卡座3.0-5.20H (有侦测PIN)

PART NO: LCK-TF-027HXXX08-WLG	REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO: 102022027	SIZE: A4	SHEET: 1/1	

LCKELEC