


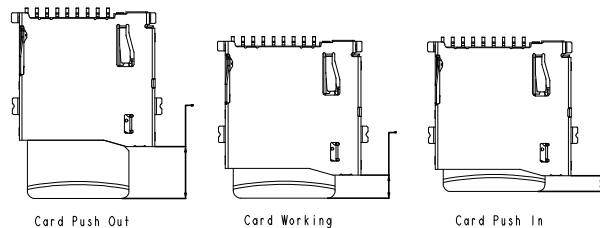
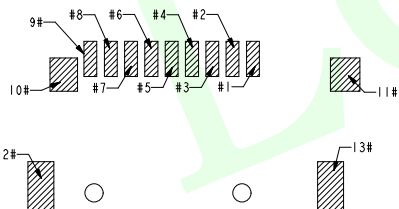
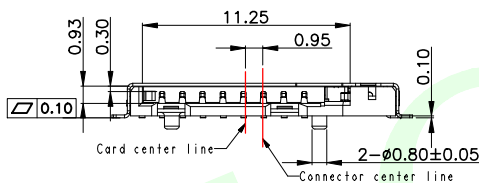


RoHS Compliant

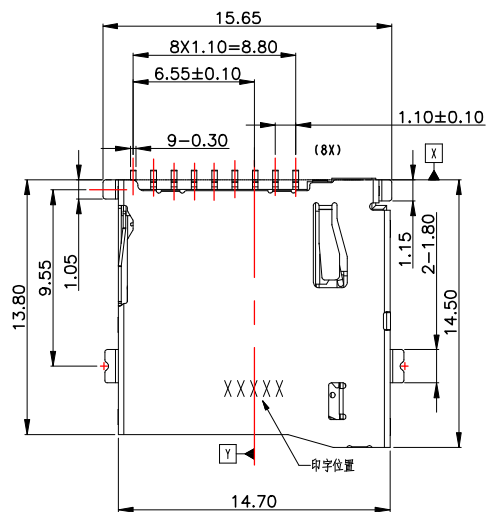

PIN ASSIGNMENTS


Pin No.	Name	Description
#1	DAT2	Data Line
#2	CD/DAT3 ²	Card Detect/Data Line
#3	CMD	Command/Response
#4	VDD	Supply voltage
#5	CLK	Clock
#6	Vss	Supply voltage ground
#7	DAT0	Data Line
#8	DAT1	Data Line
#9	CD	CARD Detect
#10/#11	GND	GND
#12/#13	GND	GND

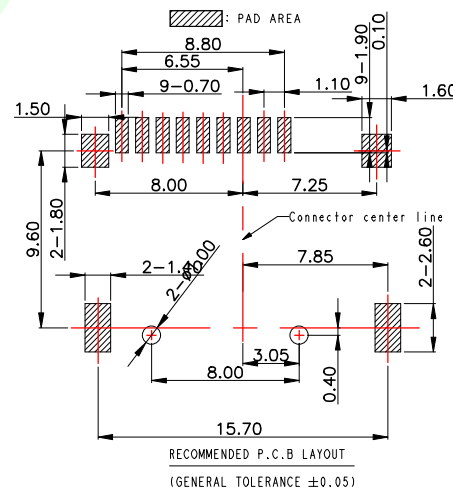

NOTE:

- 1.MATERIAL:
1-1 PLASTICS: HEAT RESISTANCE POLYMER, UL94V-0,COLOR:BLACK
1-2 CONTACT: COPPER ALLOY
1-3 SHELL; STAINLESS STEEL
- 2.PLATING:
2-1 CONTACT:
2-1-1: CONTACT AREA: Au 1u" PLATING OVER Ni.
2-1-2: SOLDERTAIL AREA: MATTE TIN 80u" MIN. OVER Ni.
50u" MIN
2-2 SHELL: SOLDERABILITY Ni PLATING OVER ALL
- 3.CONTACT AND TAIL COPLANARIT TO BE 0.10mm MAX.
- 4.RECOMMENDING A METAL MORE THAN 0.10 THICK.
PLEASE CONFIRM SOLDILITY, IF USE A METAL MASK LESS THAN 0.10mm THICK.
- 5.PRODUCT PACKING: PLEASE REFER TO THE PACKING REGULATION

产品采购完整示意号: LCK-TF-104H18509-YLG

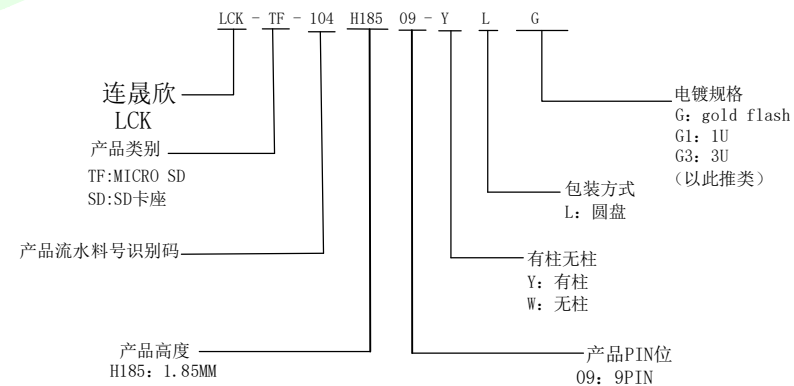

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: MICRO SD P-P H1.85			
CHECKED		DATE					
APPROVED		DATE					
PART NO: LCK-TF-104H18509-YLG				REV: 04	SCALE: 1:1	UNIT: mm	
DRAWING NO: 102022036				SIZE: A4	SHEET: 1/1		