
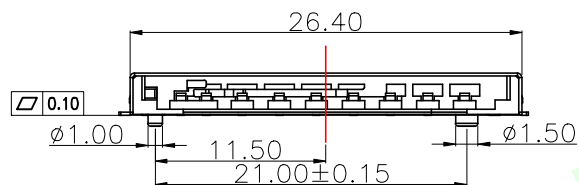


RoHS Compliant

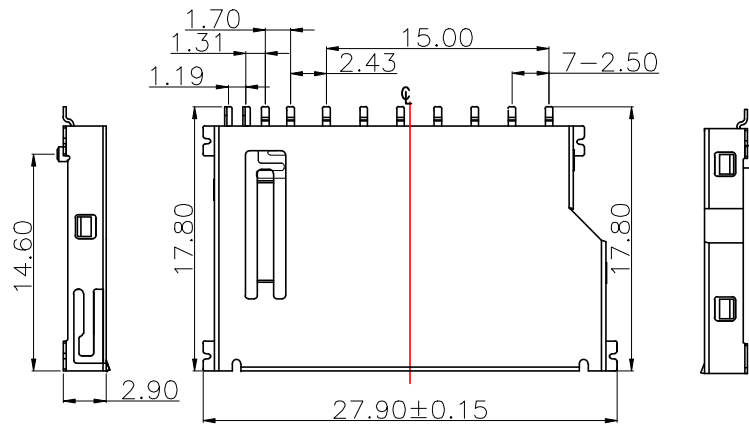

SPECIFICATION

MATERIAL

Insulator: LCP UL94V-0

Terminal: C2680 H T:0.20mm

Shell: C2680 H T:0.20mm

ELECTRICAL

Operation Voltage: 12 V DC Max.

Current Rating: 0.5 Amps Max.



Contact Resistance: 100mΩ Max.

Insulation Resistance: 1000MΩ Min./500 VDC


Dielectric Withstanding Voltage: 500 VAC / Minute

Temperature Range: -25°C To +80°C

CIRCUIT:

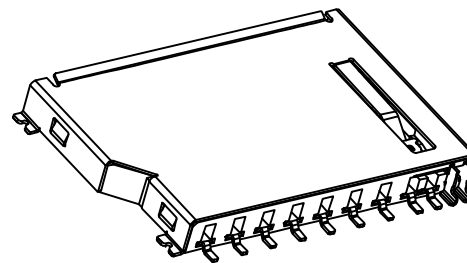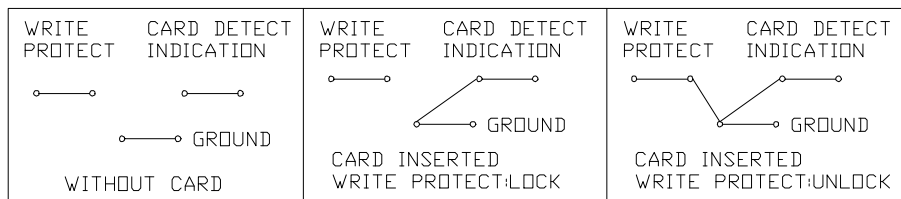


PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

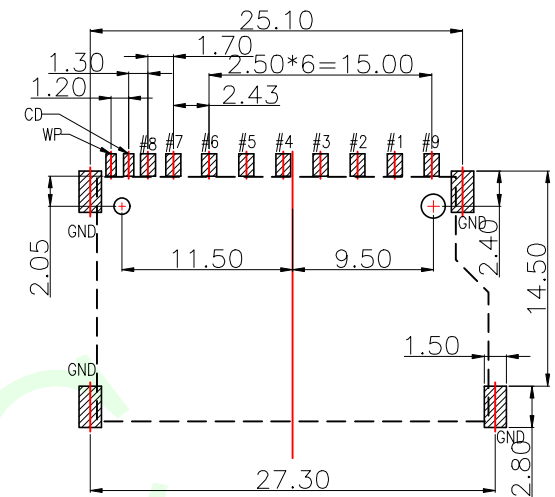

RECOMMENDED P.C.B LAYOUT (TOP VIEW)

产品采购完整示号: LCK-SD-205H2811-YLG

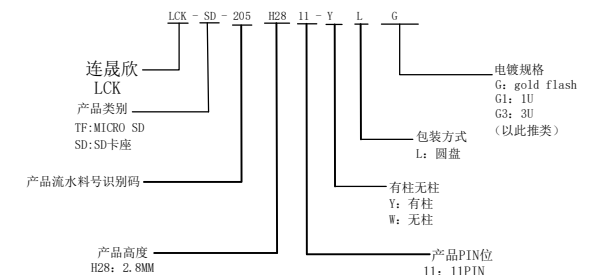

C	SHIELD	1	STAINLESS STEEL 0.20t	Ni PLATING
B	CONTACT	11	COPPER ALLOY 0.20t	Gold Flash On Contact Area Matte-Tin plated on Solder tail All over Nickel Plated
A	HOUSING	1	THERMOPLASTIC UL94-V0	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

MEASURE POINT:

QUADRANT POINT (QP)

TANGENCY POINT (TP)

INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:
CHECKED		DATE		SD CARD CONN SHORT BODY SMT
APPROVED		DATE		
PART NO:	LCK-SD-205H2811-YLG	REV:	04	SCALE: 1:1
DRAWING NO:	102022112	SIZE:	A4	UNIT: mm
		SHEET:	1/1	