



RoHS Compliant

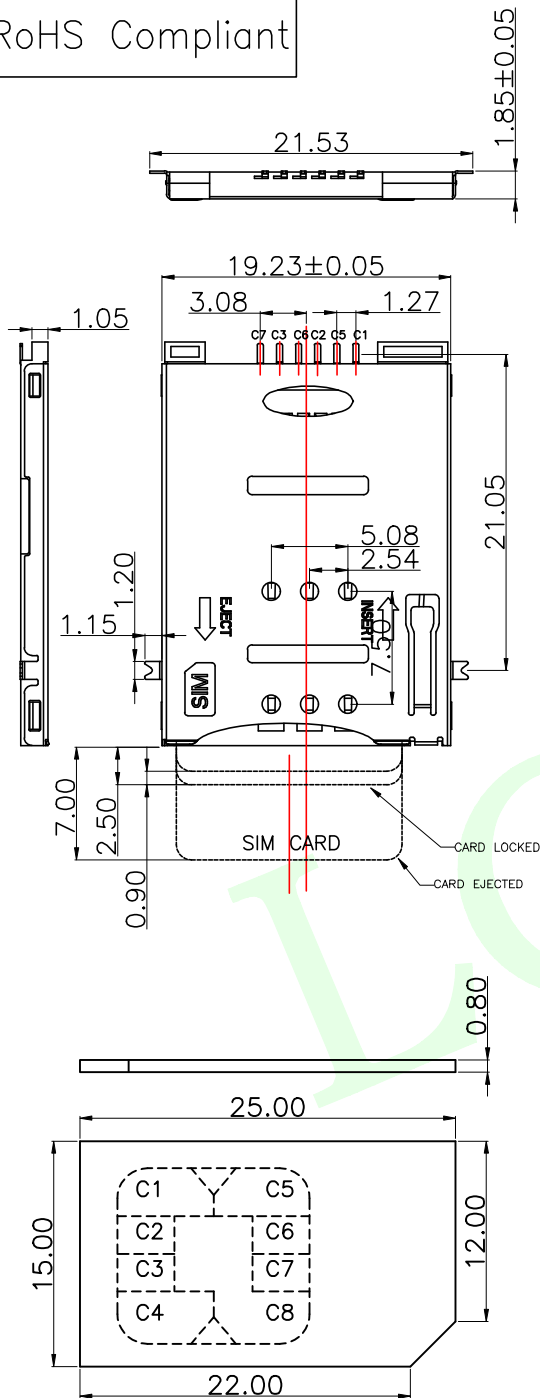

ALL SOLDER TAILS AND LATCH

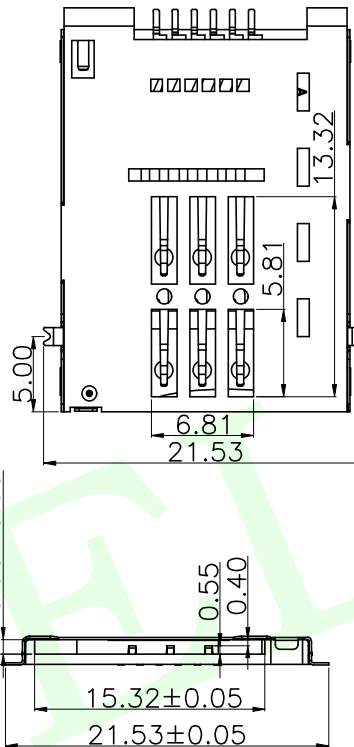

1.SPECIFICATIONS

INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:-55 C+85 C
MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:

INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:

TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

pin no.	name
C1	vcc of sim
C2	rst of sim
C3	clk of sim
C5	gnd of sim
C6	vpp of sim
C7	I/O of sim
C4/C8	n/a

连晟欣
LCK

产品类别

MS:MINI SIM

SIM:MICRO SIM

NANO: NANO SIM

产品流水料号识别码

产品高度
H188: 1.88MM

LCK-MS -203 H188 06- W L G

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘

有柱无柱
Y: 有柱
W: 无柱

产品PIN位
06: 6PIN

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

QP

TP

IP

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MINI SIM CARD PUSH PUSH 6P
CHECKED		DATE			1.88H SMT 无柱
APPROVED		DATE			
PART NO:	LCK-MS-203H18806-WLG	REV:	04	SCALE:	1:1
DRAWING NO:	102022207	SIZE:	A4	SHEET:	1/1
		UNIT:	mm		