
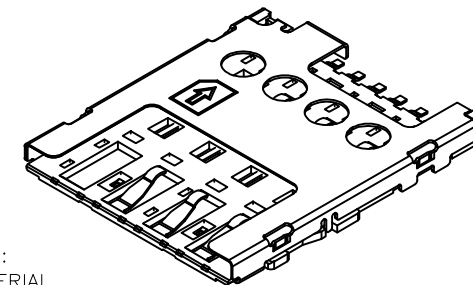
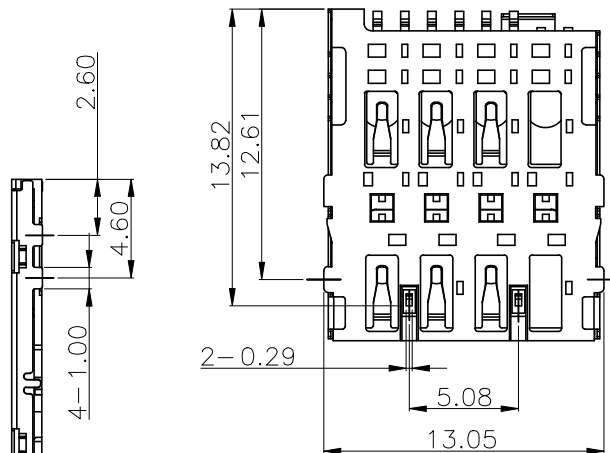


RoHS Compliant

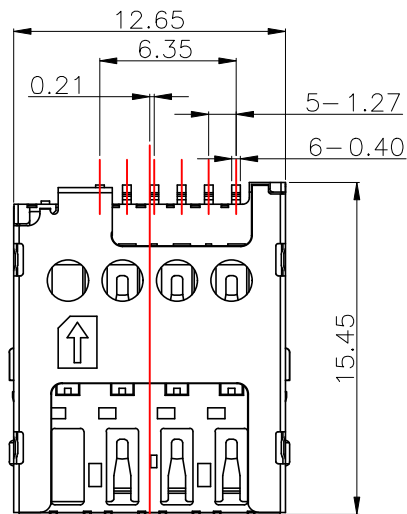

NOTES:

1) MATERIAL
HOUSING LCP UL 94V-0
CONTACT C5210
SHELL SUS304
2) FINISH:
CONTACT GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATING ON SOLDER
WITH ENTIRE CONTACT UNDERPLATED NICKEL
SHELL: NICKEL UNDERPLATED OVERALL
GOLD FLASH PLATED ON SOLDER TAILS



Pin1:VCC
Pin2:RST
Pin3:CLK
Pin4:Reserved
Pin5:GND
Pin6:VPP
Pin7:I/O
Pin8:Reserved

3) ELECTRICAL SPECIFICATIONS:


CURRENT RATING: 0.5A.
VOLTAGE RATING: 5V.
CONTACT RESISTANCE: 50 MILL.OHM MAX.
INSULATION RESISTANCE: 1000 MEG.OHM MIN.

4) MECHANICAL SPECIFICATIONS:

DURABILITY: 3000 CYCLES MIN.

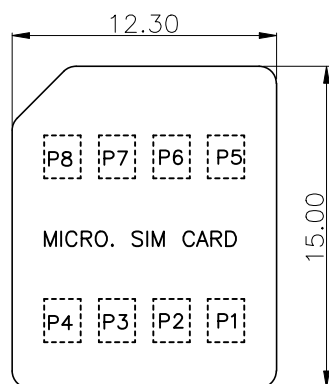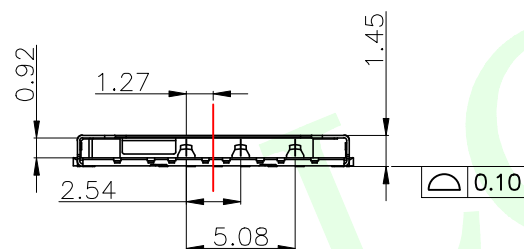

NOT GND
FOR HOLD-DOWN ONLY

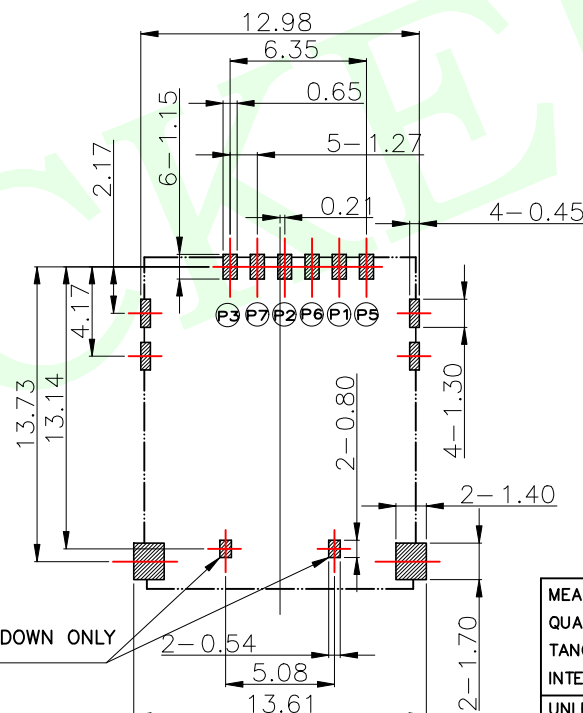

RECOMMENDED PCB
LAYOUT

TOLERANCE: ±0.05

LCK-SIM-007 P6 H145-W L G
连晟欣
LCK
产品类别
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM
产品流水料号识别码
电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)
包装方式
L: 圆盘
有柱无柱
Y: 有柱
W: 无柱
产品PIN位
P6: 6PIN
产品高度
H145: 1.45MM

MEASURE POINT:

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MICRO SIM CARD PUSH PUSH 7PIN		
CHECKED		DATE			1.45H带CD PIN (防呆型)		
APPROVED		DATE					
PART NO:	LCK-SIM-007P6H145-WLG	REV:	04	SCALE:	1:1	UNIT:	mm
DRAWING NO:	1020221027	SIZE:	A4	SHEET:	1/1		