

RoHS Compliant

A

B

C

D

E



A

B

C

D

E

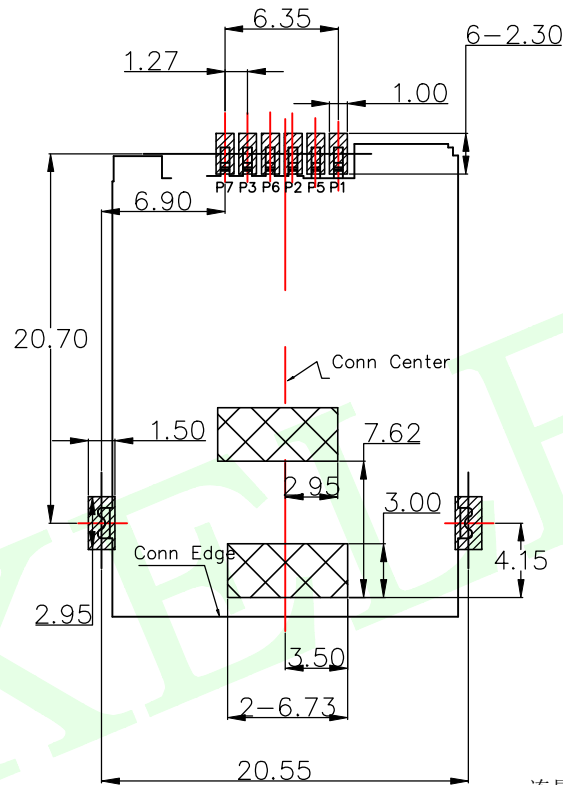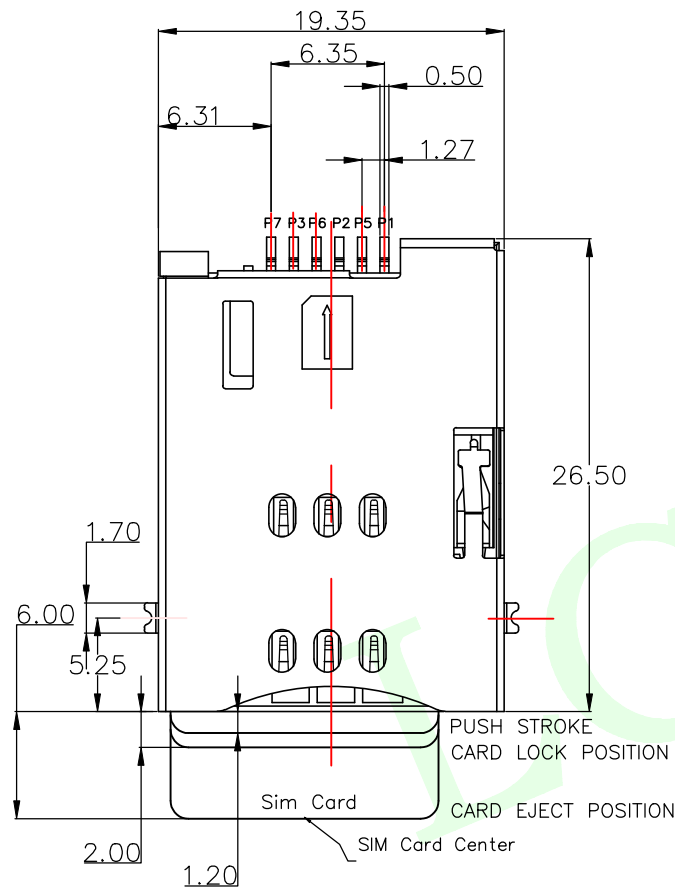

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ± 0.05



PAD AREA



FORBIDDEN AREA

Specification:

*Electrical Characteristics:

Current Rating:0.5A.

Withstanding Voltage:AC500V r.m.s.

Insulation Resistance:1000Megohms Minimum
at DC 500V

Contact Resistance:100Miliohms Maximum.

*Mechanical Characteristics:

Mating Cycles:3000 Insertions.

*Environmwntal:

Operating Temperature:-25°To+70°

LCK-MS -211 H180 06- W L G

连晟欣
LCK

产品类别

MS:MINI SIM
SIM:MICRO SIM
NANO: NANO SIM

产品流水料号识别码

产品高度
H180: 1.80MM


电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘

有柱无柱
Y: 有柱
W: 无柱

产品PIN位
06: 6PIN

CONNECTOR TERMINAL NO	PIN NO
PIN 1	VCC:PWR SIGNAL AND GND
PIN 2	RST:RESET SIGNAL
PIN 3	CLK:CLOCKING SIGNAL
PIN 5	GND:PWR SIGNAL AND GND
PIN 6	VPP:PROGRAMMING VOLTAGE
PIN 7	I/O:SERIAL DATA INPUT/OUTPUT

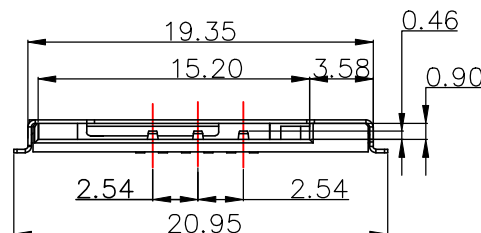

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MINI SIM PUSH 1.8H 6P脚距5.25无柱			
CHECKED		DATE						
APPROVED		DATE						
PART NO:	LCK-MS-211H18006-WLG	REV:	04	SCALE:	1:1	UNIT:	mm	
DRAWING NO:	102021002	SIZE:	A4	SHEET:	1/1			