

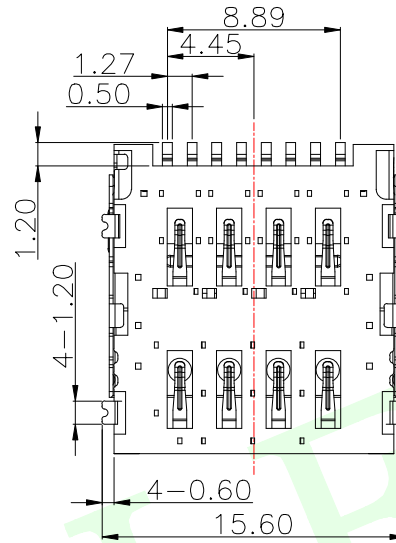
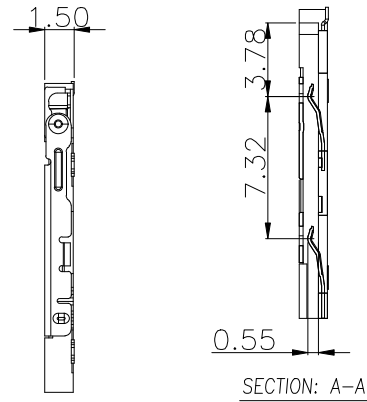


RoHS Compliant

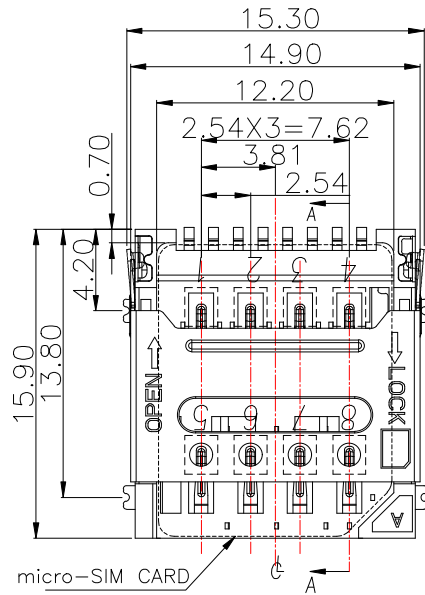



NOTES:

- ELECTRICAL CHARACTERISTICS
1-1. CONTACT RESISTANCE: 60 MILLIOHMS MAX
1-2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
2-1. OPERATION TEMPERATURE RANGE: -25°C~+70°C
2-2. DURABILITY: 5000 CYCLES
- MATERIAL:
3-1. HOUSING: THERMOPLASTIC, UL 94-V0
3-2. TERMINAL: PHOSPHOR BRONZE, T=0.15
3-3. SHELL: STAINLESS STEEL, T=0.15
- FINISHED:
4-1. TERMINAL: NI PLATED UNDER, AU PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL

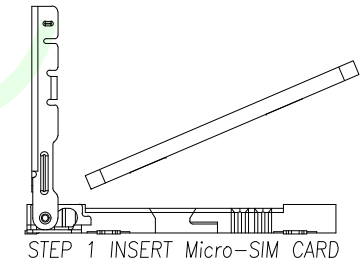

STEP 2 PUSH THE SHELL

STEP 3 FINISH

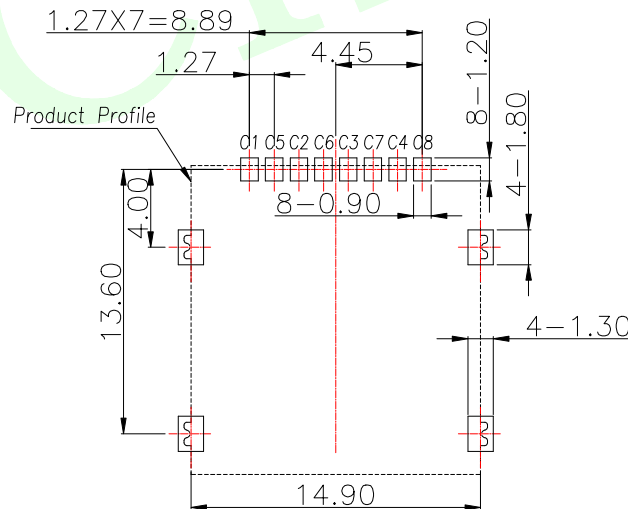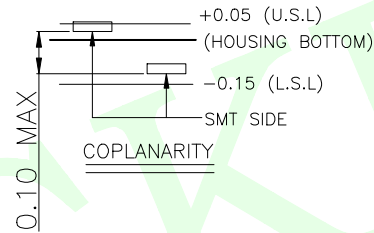

PIN No.	DESCRIPTION
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	RESERVED
C5	GND
C6	VPP (VARIABLE SUPPLY VOLTAGE)
C7	I/O (DATA INPUT/OUTPUT)
C8	RESERVED

LCK
产品类别
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM

产品流水料号识别码

产品PIN位
P8: 8PIN

LCK-SIM-014

P8 H150-W L G

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘

有柱无柱
Y: 有柱
W: 无柱

产品高度
H150: 1.50MM

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP
TP
IP

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MICRO SIM CARD 8PIN 1.5H (掀盖式4x2PIN)
CHECKED		DATE		REV: 04	SCALE: 1:1
APPROVED		DATE		SIZE: A4	SHEET: 1/1
PART NO: LCK-SIM-014P8H150-WLG				UNIT: mm	
DRAWING NO: 1020221340					