



RoHS Compliant




NOTES:


- 1.MATERIAL:
HOUSING: High Temperature Thermoplastic
Terminal:Copper Alloy
Shell: Stainless Steel
- 2.PLATING:
Terminal:50u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA
Shell:30u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA
- 3.TECHNICAL SPECIALITY:
RATED VOLTAGE: 30V AC MAX.
CURRENT RATING: 0.5A MAX.
INSULATION RESISTANCE:1000MΩ MIN
CONTACT REISTANCE:50mΩ MAX
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTES
OPERATING TEMPERATURE: -25℃ ~+85℃
Humidity 80% R.H MAX
- 4.DIMENSIONS WITH MARK" * "MUST BE MEASURE
BY QC AND I/PC

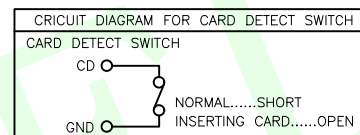

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

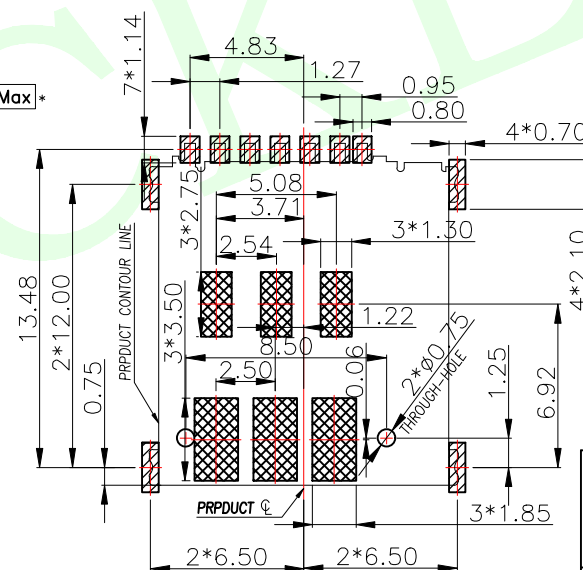

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)
RECOMMENDED METAL MASK T=0.12mm



连晟欣
LCK

产品类别
MS:MINI SIM
SIM:MICRO SIM
NANO: NANO SIM

产品流水料号识别码

产品PIN位
P8: 8PIN

产品高度
H150: 1.50MM

有柱无柱
Y: 有柱
W: 无柱

包装方式
L: 圆盘

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

MEASURE POINT:

QUADRANT POINT

QUADRANT POINT
TANGENCY POINT

TANGENCY POINT
INTERSECTION POINT

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X.	+0.25
----	-------

X.x	± 0.30
-----	------------

ΔH_{melt}	± 0.20
ΔG_{melt}	± 0.15

λ.xx	±0.15
ANGULAR	±3°

OP

QF

 联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: 137H NANO SIM CARD CONNECTOR		
CHECKED		DATE				
APPROVED		DATE				
PART NO: LCK-NANO-113-P7H137-YLG				REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO: 1020221351A				SIZE: A4	SHEET: 1/1	 