


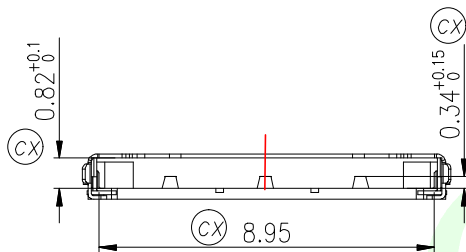
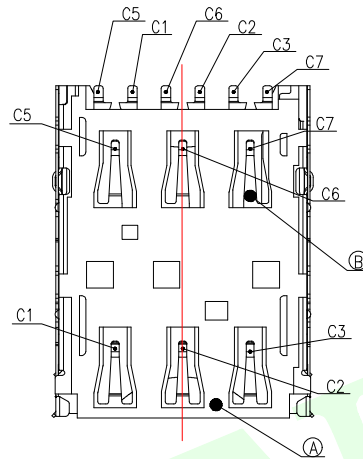
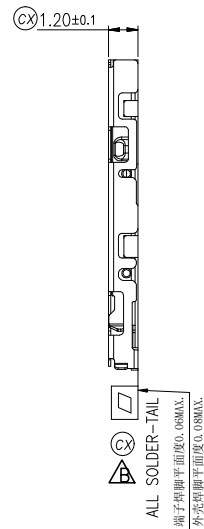


RoHS Compliant

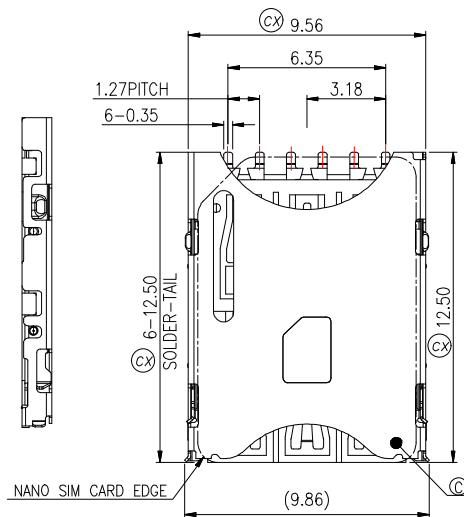

NANO SIM CARD PAD

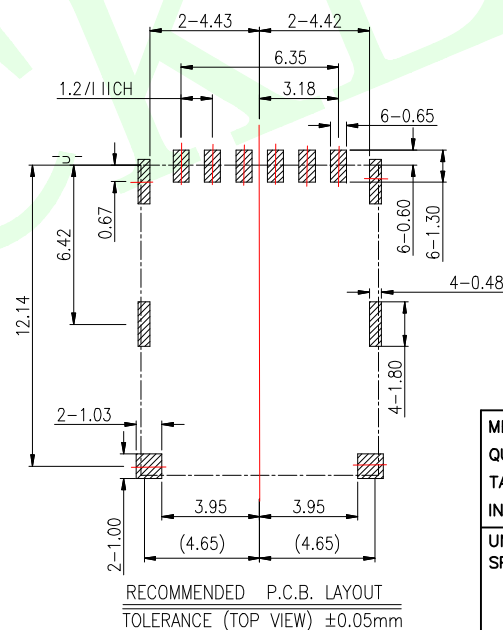

RECOMMENDED P.C.B. LAYOUT
TOLERANCE (TOP VIEW) ±0.05mm

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1A.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V R.M.S MIN;
 - INSULATION RESISTANCE: 500MΩ MIN.
 - CONTACT RESISTANCE: 100mΩ MAX. (INITIAL)
- LIFE TEST: 1500 CYCLES.
- OTHER GENERAL SPEC. TO REFER "2SM2021-000111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE & REEL.
- ⊗ REPRESENT CRITICAL DIMENSIONS.
- ▽ REPRESENT CPK DIMENSIONS.

C	SHELL	1	STAINLESS STEEL, 0.10T	NICKEL PLATING OVER ALL
B	CONTACT	1	COPPER ALLOY, 0.10T	GOLD FLASH ON CONTACT AREA AND SOLDER AREA 50u" MIN NICKEL UNDER-PLATED
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

LCK-NANO-115	P6	H120-W	L	G
连晟欣 LCK	产品类别	MS: MINI SIM SIM: MICRO SIM NANO: NANO SIM	产品流水料号识别码	产品PIN位 P6: 6PIN
电镀规格 G: gold flash G1: 1U G3: 3U (以此类推)	包装方式 L: 圆盘	有柱无柱 Y: 有柱 W: 无柱	产品高度 H110: 1.10MM	

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

 联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd					TITLE: NANO SIM SMT type 直插式1.20H			
DESIGN	Andy	DATE	2014.12.24		REV: 04	SCALE: 1:1	UNIT: mm	
CHECKED		DATE			SIZE: A4	SHEET: 1/1		
APPROVED		DATE						
PART NO:	LCK-NANO-115-P6H120-WLG							
DRAWING NO:	1020221440							