

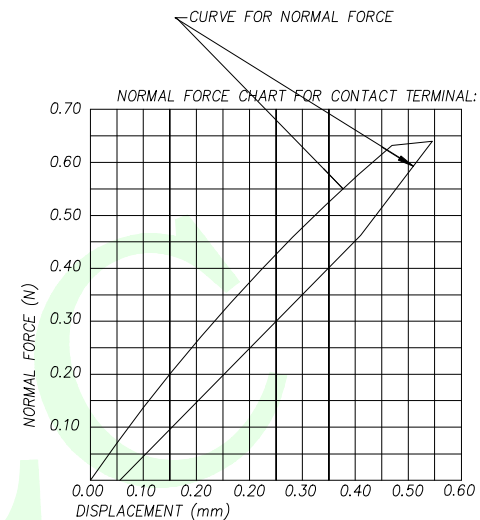

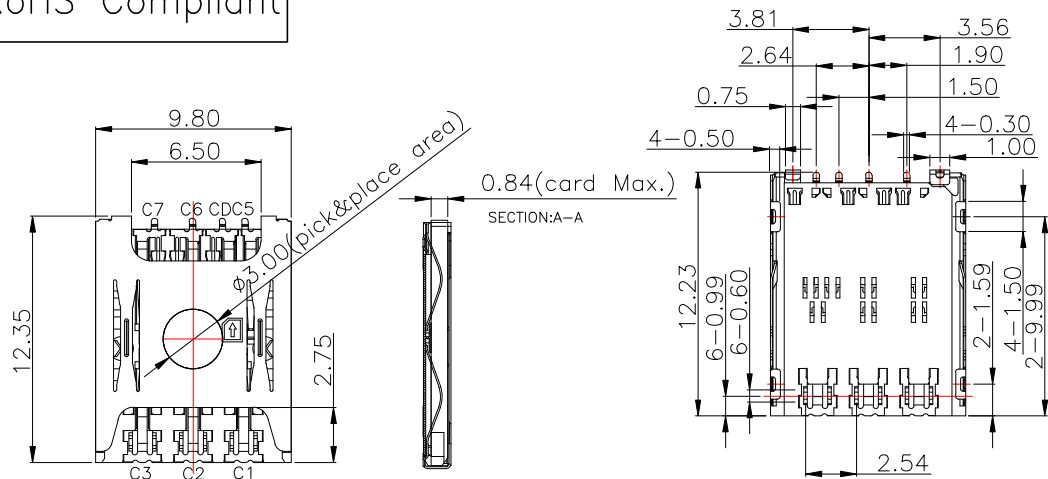


RoHS Compliant

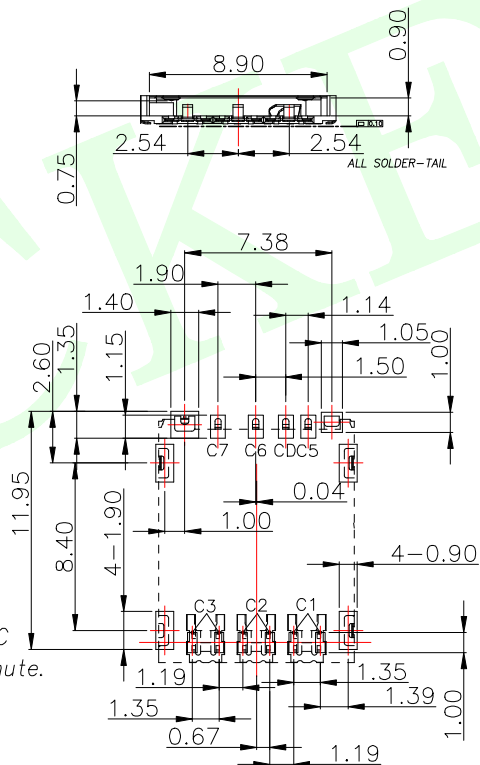

NANO SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A
CD	DETECTION SWITCH

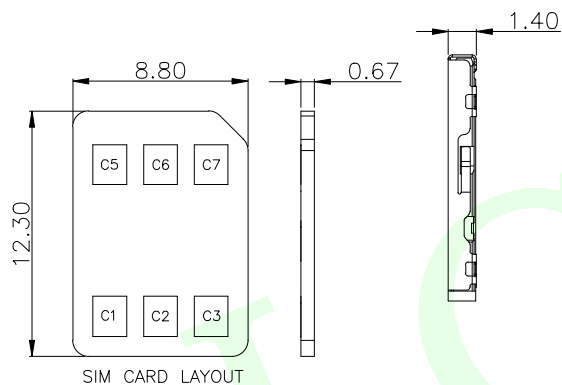

NOTES:

1. MATERIAL: SEE TABLE
2. SPECIALITY:

- 2.1 Rated current: 0.5A Max
- 2.2 Rated voltage: 30V AC
- 2.3 Contact Resistance: 100mohm MAX
- 2.4 Insulation Resistance: 1000Mohm MIN 500V DC
- 2.5 Dielectric withstanding voltage: 500V AC/minute.
- 2.6 Solder ability: 250±5 10±0.5s.
- 2.7 Durability: 5000 Cycles
- 2.8 Mating and Unmating force
 - Insertion Force 10N Max
 - Withdrawal Fore 0.5N Min
- 2.9 Operating Temperature: -40°C~+80°C

连晟欣
LCK

产品类别
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM

产品流水料号识别码

产品PIN位
P7: 7PIN

产品高度
H140: 1.40MM

有柱无柱
Y: 有柱
W: 无柱

包装方式
L: 圆盘

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

MEASURE POINT:	
QUADRANT POINT	
TANGENCY POINT	
INTERSECTION POINT	

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X.	± 0.25
X.x	± 0.20
X.xx	± 0.15
ANGULAR	$\pm 3^{\circ}$

QP
TP
IP

 联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24
CHECKED		DATE	
APPROVED		DATE	

PART NO: LCK-NANO-117-I
DRAWING NO: 1020221310

TITLE:
6Pin 1.4H PUSH PULL Nano SIM
CARD CONN.

REV: 04	SCALE: 1:1	UNIT: mm
SIZE: A4	SHEET: 1/1	