

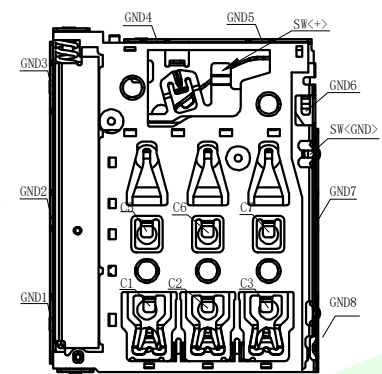
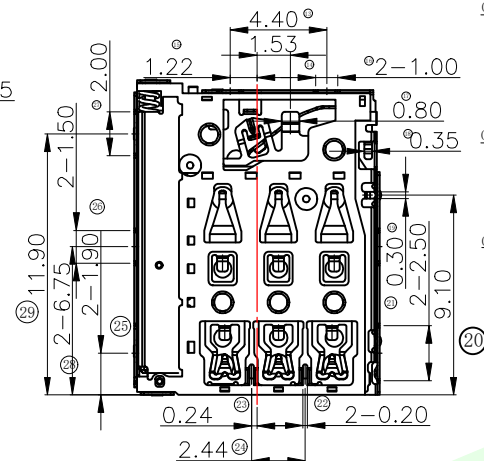
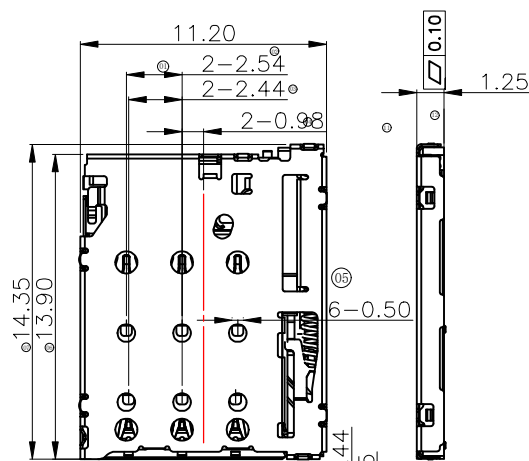
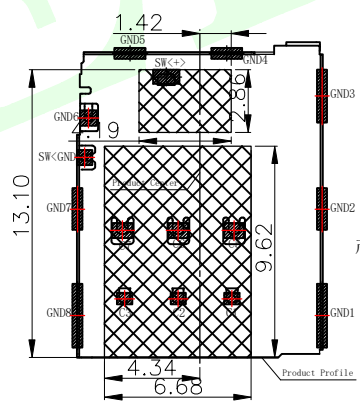


RoHS Compliant

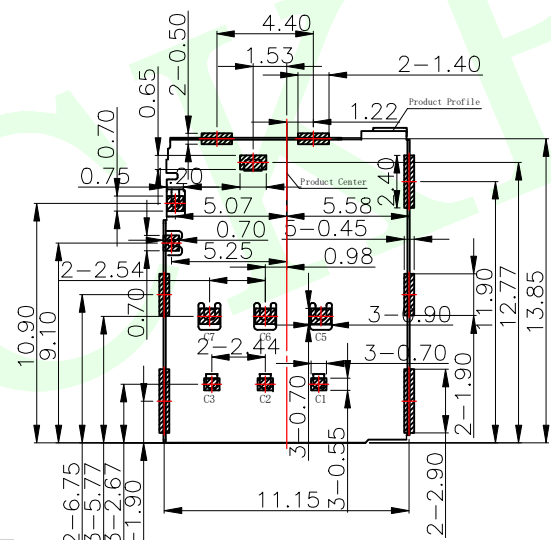


PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

- Notes:
- Material:
Housing: High Temperature Thermoplastic
Terminal: Copper Alloy
Shell: Stainless Steel
 - Plating:
Terminal: 50u" Ni Underplated Overall
G/F Plated On Contact Area
G/F Plated On Solder Area
Shell: 30u" Ni Underplated Overall
G/F Plated On Contact Area And older Area
 - Technical Specialty:
Rated Voltage: 30V
Current Rating: 0.5A
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 100mΩ Max.
Withstanding Voltage: 500V DC For 1 Minutes.
Operating Temperature: -40℃~+75℃ Humidity 80% R.H Max.

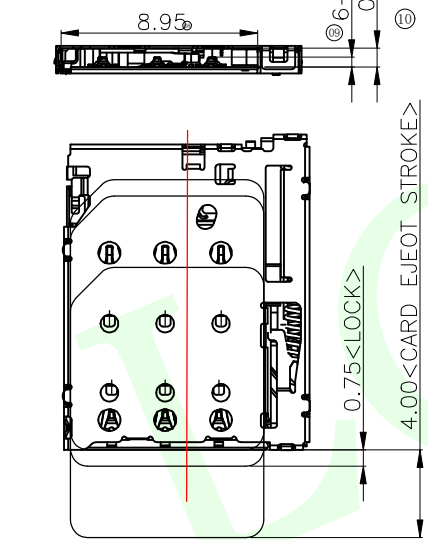

LCK-NANO-1310-P7 H125-W L G

连晟欣
LCK
产品类别
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM
产品流水料号识别码
产品PIN位
P7: 7PIN
产品高度
H124: 1.24MM
电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)
包装方式
L: 圆盘
有柱无柱
Y: 有柱
W: 无柱

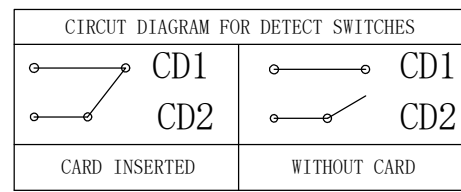

RECOMMENDED PCB LAYOUT<TOLERANCE: ±0.05>
RECOMMENDED METAL MASK T=0.12MM

- SMT SOLDER AREA
- COPPER RESTRICTED AREA
- 1. TOUCH AREA OF CONTACT TIPS NO ELECTRICAL FUNCTION
- 2. NO FIRST PCB LAYOUT CIRCUITS IN THE AREA

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	7Pin 1.25H Nano SIM PUSH		
CHECKED		DATE		CONN CUSTOMER			
APPROVED		DATE					
PART NO:	LCK-NANO-1310-P7H125-WLG			REV:	04	SCALE: 1:1	
DRAWING NO:	1020221450			SIZE:	A4	SHEET: 1/1	