
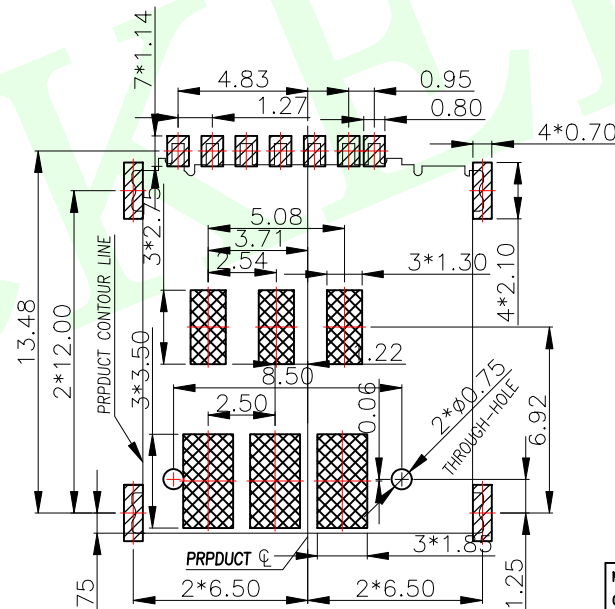
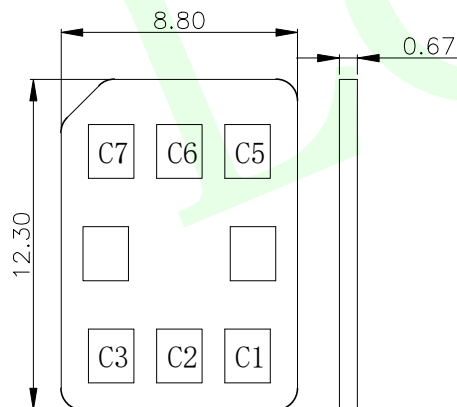
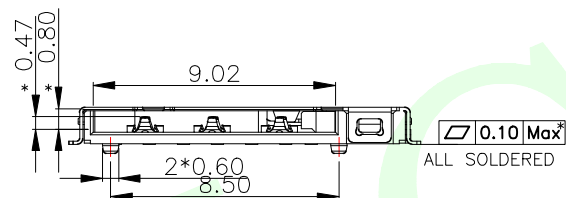
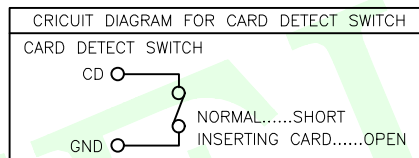
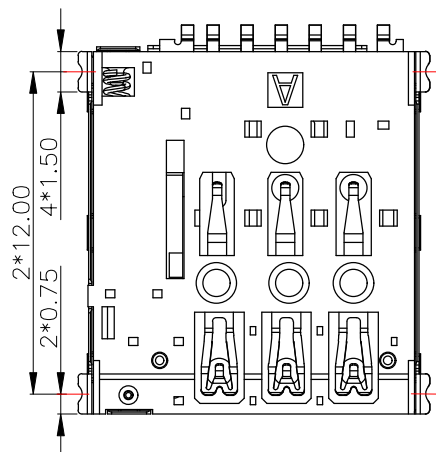
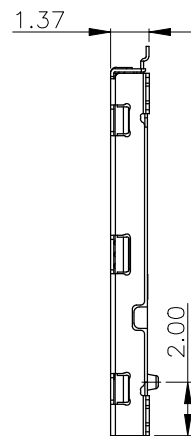


RoHS Compliant

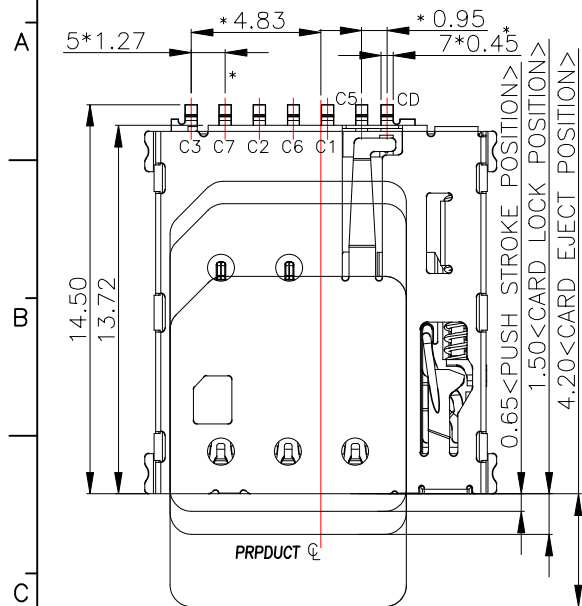

/// SMT SOLDER AREA

NO PATTERN AND VIA HOLE IN HTIS AREA

NOTES:

1.MATERIAL:

HOUSING: High Temperature Thermoplastic
Terminal:Copper Alloy
Shell: Stainless Steel


2.PLATING:

Terminal:50u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA
Shell:30u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA AND SOLDER AREA

3.technical speciality:

RATED VOLTAGE: 30V AC MAX.
CURRENT RATING: 0.5A MAX.
INSULATION RESISTANCE:1000MΩ MIN
CONTACT REISTANCE:50mΩ MAX
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTES
OPERATING TEMPERATURE: -25℃ ~+85℃
Humidity 80% R.H MAX

4.DIMENSIONS WITH MARK" * "MUST BE MEASURE
BY QC AND IPQC



PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	6+1PIN 137H NANO SIM CARD CONNECTOR
CHECKED		DATE			
APPROVED		DATE			
PART NO: LCK-NANO-113A	REV: 04	SCALE: 1:1	UNIT: mm		
DRAWING NO: 1020221351	SIZE: A4	SHEET: 1/1			