
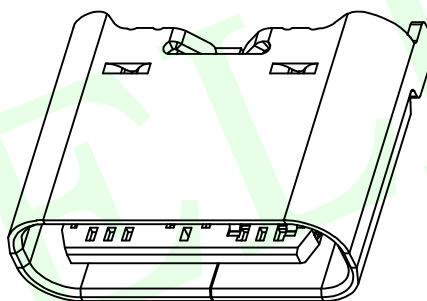
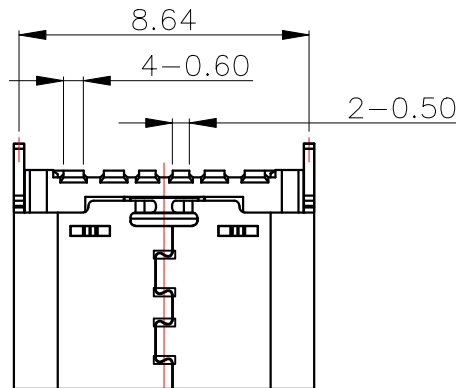
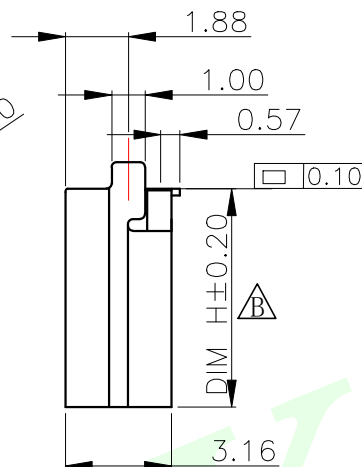
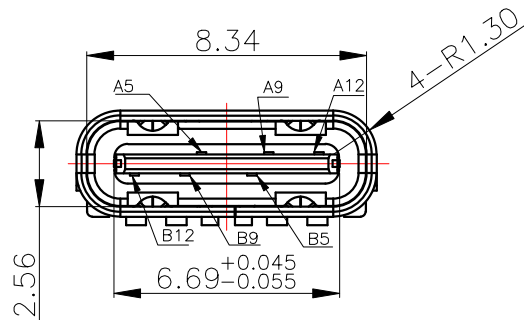





RoHS Compliant

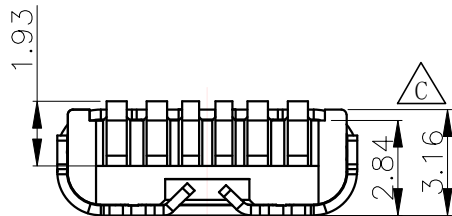

SPECIFICATION:

- Material:
HOUSING&MOLDING:LCP, UL94 V-0
CONTACTS:C5191R-H
SHELL:SUS, T=0.30
- Mechanical:
2.1.Mating force:5~20Nf Max. ;
2.2.Unmating force:6~20Nf Min. ;
2.3.Durability:3000 Cycles;
- Electrical:
3.1.Current Rating:3A Max. ;
3.2.Voltage Rating:20V Max. ;
3.3.Dielectric Withstanding voltage:100VAc;
3.4.Contact resistance:40m Ohms Max. ;
3.5. Insulation Resistance:100M Ohms Min. ;
- Environmental:
4.1.Operating temperature:-40° C~+85° C;
4.2. Wetting Temperature:265±5° C, 5±0.5s

A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

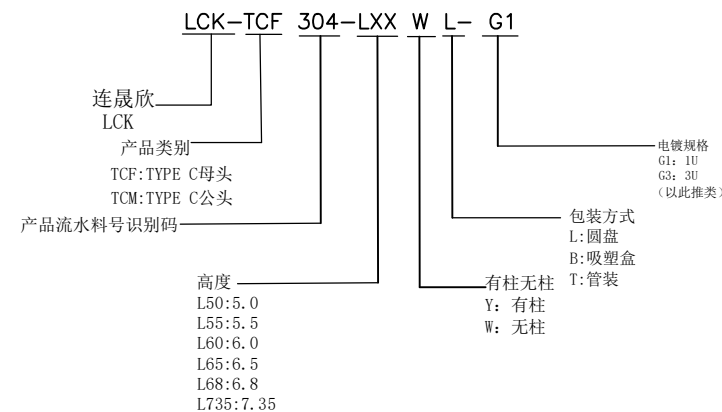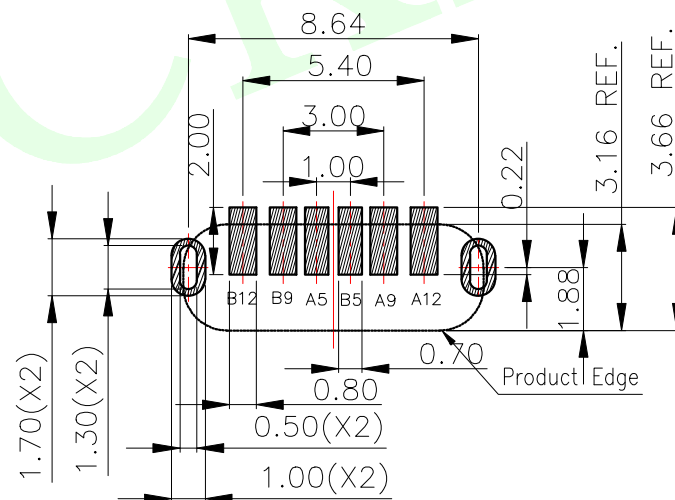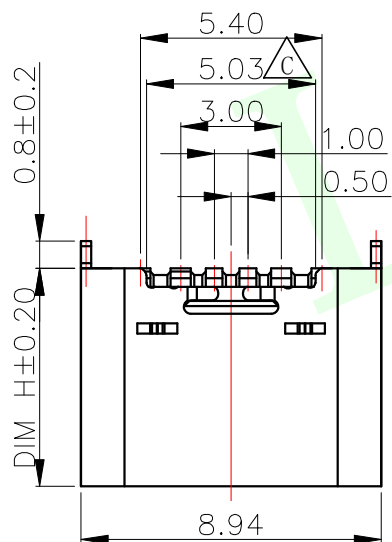

Recommend PCB Layout
(Tol:±0.05,T=1.0±0.05mm)

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°




联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	USB TYPE C 6PIN 立贴贴片脚长0.8
CHECKED		DATE			H5.0&7.35不露舌
APPROVED		DATE			
PART NO:	LCK-TCF304-LXXWL-G1	REV:	04	SCALE:	1:1
DRAWING NO:	1020221306	SIZE:	A4	SHEET:	1/1




RoHS Compliant


USB TYPE C 6PIN SMT 立贴所有高度示意图:

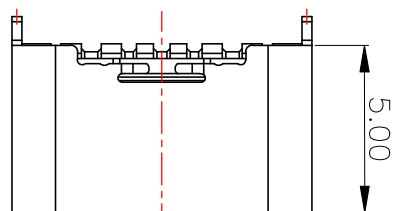


H=5.00

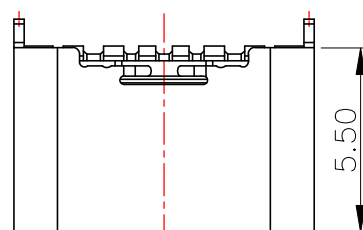


H=5.50

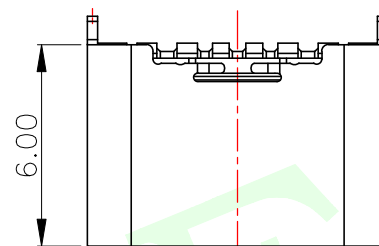


H=6.00

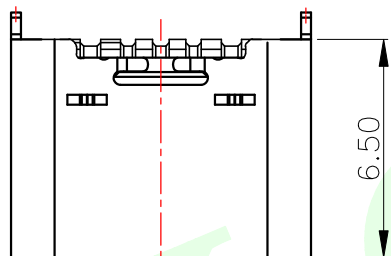


H=6.50

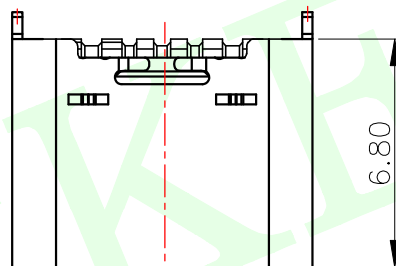

H=6.80

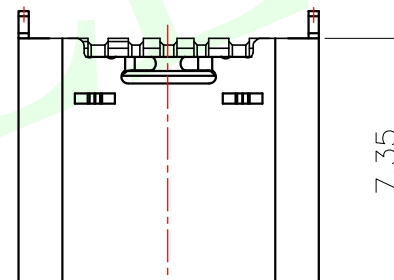

H=7.35

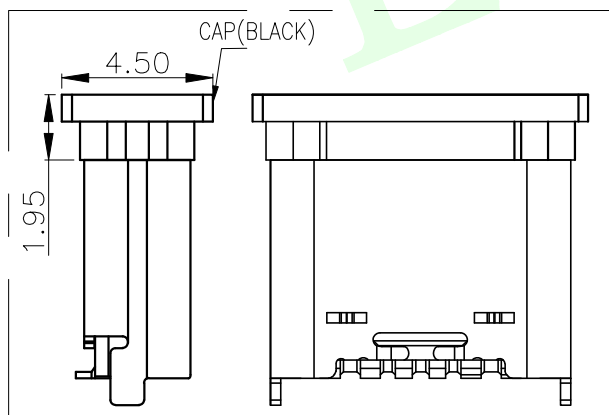

PART No.	DIM H
LCK-TCF304-L50WL-G1	5.0
LCK-TCF304-L55WL-G1	5.5
LCK-TCF304-L60WL-G1	6.0
LCK-TCF304-L65WL-G1	6.5
LCK-TCF304-L68WL-G1	6.8
LCK-TCF304-L735WL-G1	7.35



MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)
UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.X ±0.20
X.XX ±0.15
ANGULAR ±3°

 联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd				TITLE: USB TYPE C 6PIN 立贴贴片脚长0.8 H5.0&7.35不露舌	
DESIGN	Andy	DATE	2014.12.24	PART NO: LCK-TCF304-LXXWL-G1	
CHECKED		DATE		REV: 04	SCALE: 1:1
APPROVED		DATE		SIZE: A4	SHEET: 1/1
DRAWING NO: 1020221306				UNIT: mm	

RoHS Compliant

说明:

1. 每卷前后各空15PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每10卷盘一叠共12000Pcs装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高), 不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
 - a. 产品不可跑出下带凹槽;
 - b. 产品不可有摔伤, 变形;
 - c. 内包装材料不可严重破损.

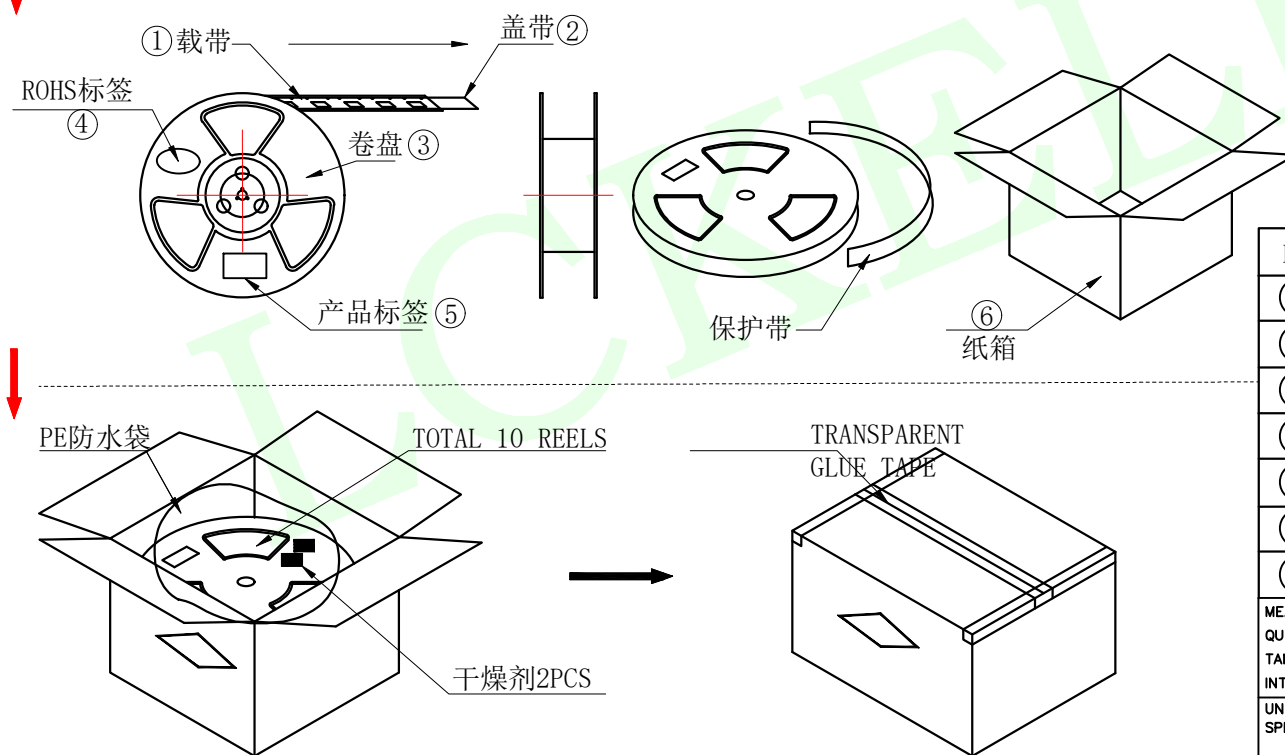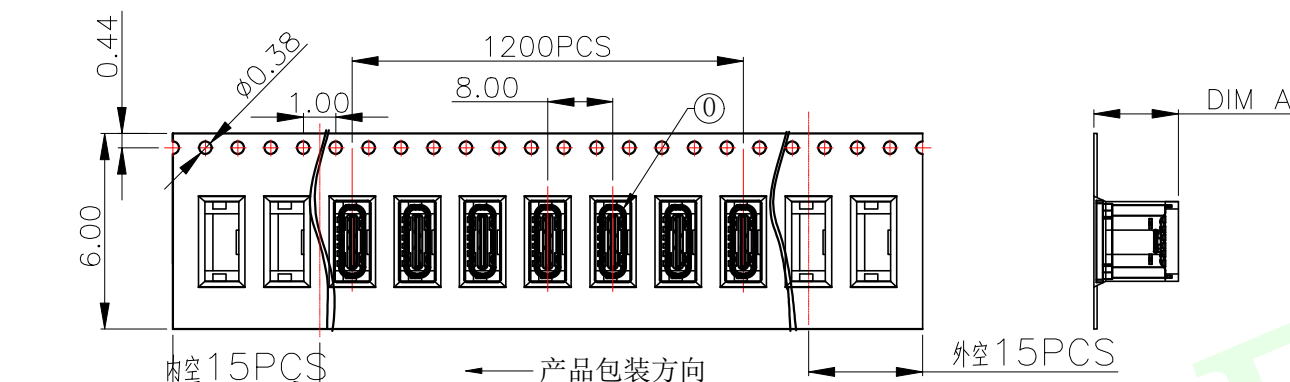

NO.	NAME	SPEC	Q' TY
①	TYPE C 6P母座成品		12000PCS/箱
②	载带	W=24mm, T=0.40mm	1200PCS/盘
③	盖带	W=21.3mm	
④	卷盘	380*100*24.4mm	10PCS/箱
⑤	ROHS标签		10PCS/箱
⑥	产品标签		10PCS/箱
⑦	纸箱	390*390*310mm	12000PCS/箱

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

UNLESS OTHERWISE

SPECIFIED, TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

ANGULAR ±3°

QP

TP

IP



联晟欣连接器(深圳)有限公司

Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN

Andy

DATE

2014.12.24

TITLE:

USB TYPE C 6PIN 立贴贴片脚长0.8

CHECKED

DATE

DATE

DATE

H5.0&7.35不露舌

APPROVED

DATE

DATE

DATE

REV: 04

PART NO:

LCK-TCF304-LXXWL-G1

REV: 04

SCALE: 1:1

UNIT: mm

DRAWING NO:

1020221306

SIZE: A4

SHEET: 1/1

UNIT: mm