

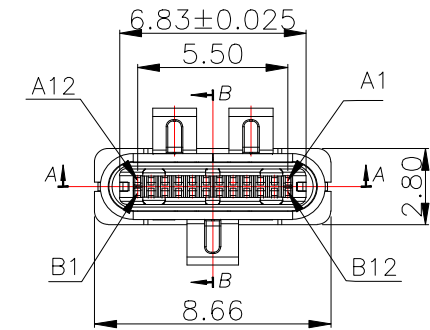

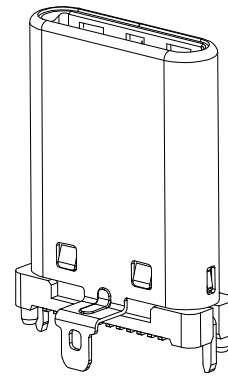
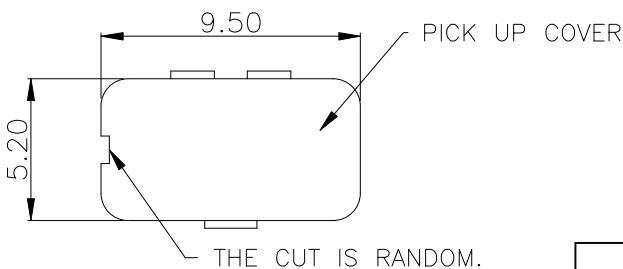
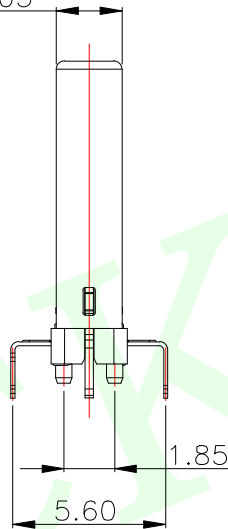


RoHS Compliant

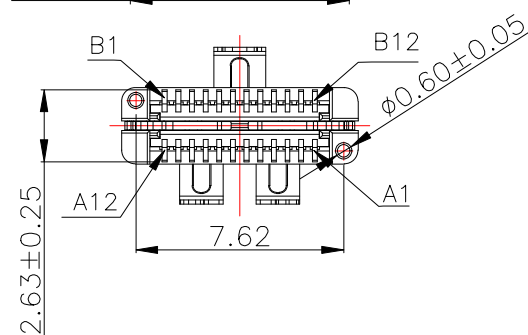

2.40±0.03

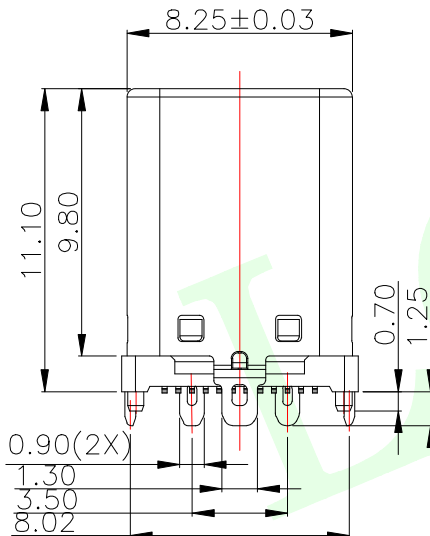

NOTE:

1. MATERIAL SPECIFICATION:

1. HOUSING&PICKUP COVER: LCP, UL94 V-0. BLACK
2. CONTACTS: SEE TABLE 1
3. LATCH: STAINLESS STEEL (SUS301)
4. SPRING: STAINLESS STEEL (SUS304)
5. FRONT SHELL: STAINLESS STEEL (SUS304)

2. PLATING SPECIFICATION:

2-1. CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2. FRONT SHELL:

Ni 30u" MIN. UNDER PLATED OVER ALL.

2-3. LATCH:

Ni 50u" MIN. UNDER PLATED OVER ALL.

80u" MIN. TIN PLATED ON SOLDER AREA.

2-4. SPRING:

CLEAR ONLY

3. MECHANICAL PERFORMANCE:

3-1. INSERTION FORCE: 0.5~2.0kgf.

3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.

3-3. DURABILITY: 10000 CYCLES.

4. ELECTRICAL PERFORMANCE:

4-1. CURRENT RATING: SEE TABLE 1

VOLTAGE RATING: 5.0V

4-2. LLOR:

VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.

SHIELD: 50mΩ/MAX.

LLOR MAX. CHANGE OF ALL PINS: 10mΩ.

4-3. INSULATION RESISTANCE: 100MΩ MIN

4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.


5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25° C~+85° C.

6. IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL

BE MAINTAINED FOR 10 SECONDS AT 260° C.




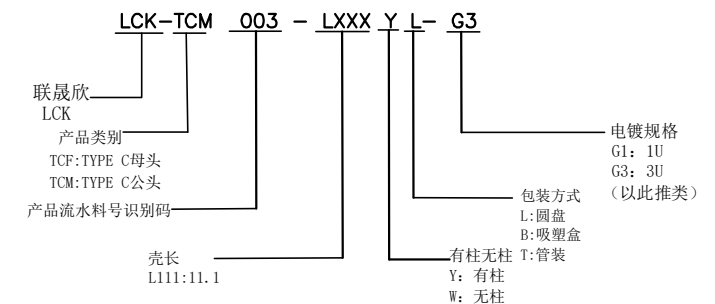


QUADRANT POINT			 联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd				
TANGENCY POINT							
INTERSECTION POINT							
UNLESS OTHERWISE SPECIFIED, TOLERANCE:			DESIGN	Andy	DATE	2014.12.24	TITLE:
X. ±0.25			CHECKED		DATE		USB CM VERTICAL TYPE HIGHT=11.1
X.x ±0.20			APPROVED		DATE		
X.xxx ±0.15			PART NO: LCK-TCM003-L111YL-G3				REV: 04
ANGULAR ±3°			DRAWING NO: 102022239				SCALE: 1:1
							UNIT: mm
							SIZE: A4
							SHEET: 1/1
							


RoHS Compliant

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

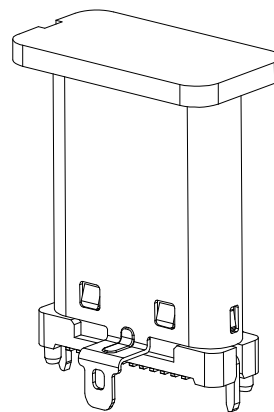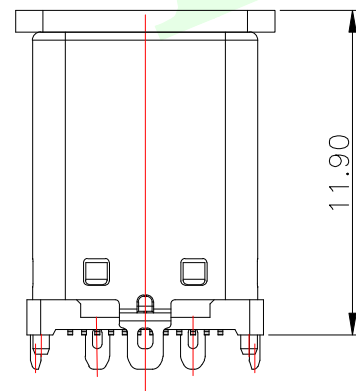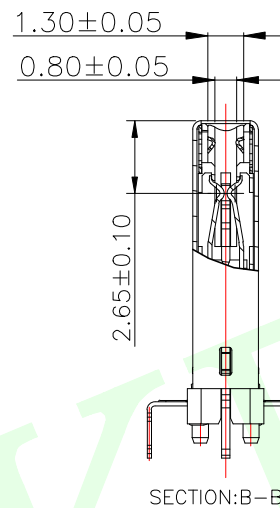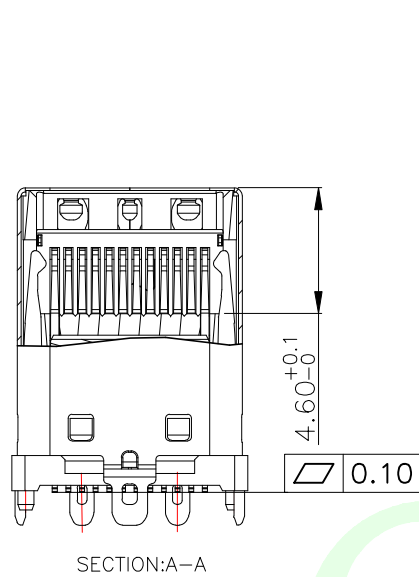

AFTER WITH PICKUP COVER

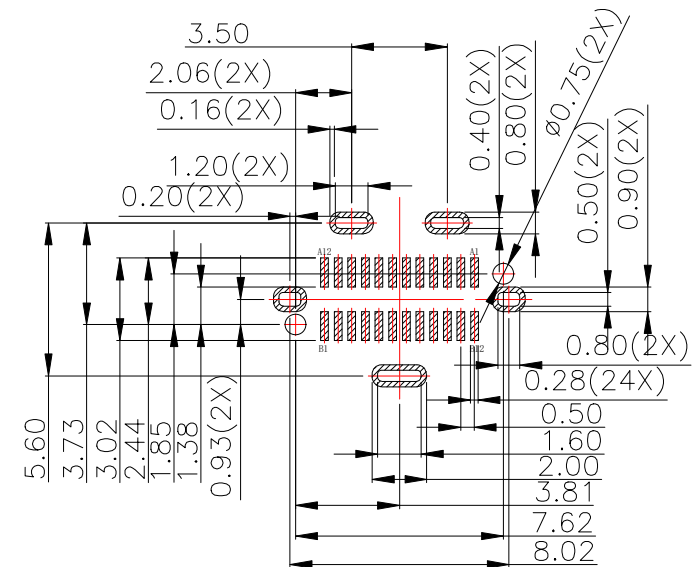

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8±0.10MM;DEFAULT TOLERANCE:±0.05

QUADRANT POINT				联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd					
TANGENCY POINT									
INTERSECTION POINT									
UNLESS OTHERWISE SPECIFIED, TOLERANCE:						DESIGN		Andy	DATE
X. ±0.25			CHECKED		DATE		USB CM VERTICAL TYPE HIGHT=11.1		
X.x ±0.20			APPROVED		DATE				
X.xx ±0.15			PART NO: LCK-TCM002-L111YL-G3				REV: 04	SCALE: 1:1	UNIT: mm
ANGULAR ±3°			DRAWING NO: 102022239				SIZE: A4	SHEET: 1/1	