


RoHS Compliant

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC.
4. 接触电阻: $\leq 50\text{m}\Omega$.
5. 绝缘电阻: $\geq 100\text{M}\Omega$.
6. 额定电流: 1A, AC/DC.

CKT	DimA	DimB	DimC
2	1.25	3.80	5.75
3	2.50	5.05	7.00
4	3.75	6.30	8.25
5	5.00	7.55	9.50
6	6.25	8.80	10.75
7	7.50	10.05	12.00
8	8.75	11.30	13.25
9	10.00	12.55	14.50
10	11.25	13.80	15.75
11	12.50	15.05	17.00
12	13.75	16.30	18.25
13	15.00	17.55	19.50
14	16.25	18.80	20.75
15	17.50	20.05	22.00
16	18.75	21.30	23.25

序号	项目	描述	备注
1	塑胶	LCP	
2	端子	黄铜	
3	焊片	黄铜	

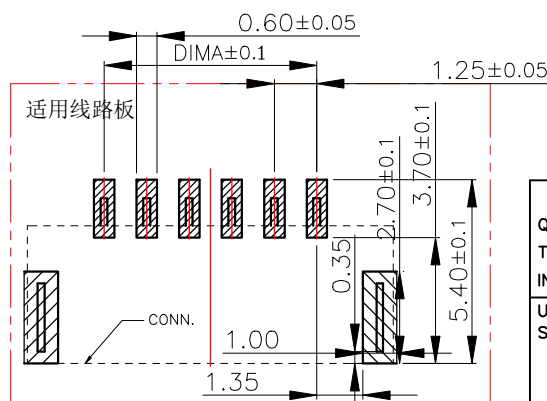

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^{\circ}$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: GH 1.25Pitch 带扣卧贴SMT			
CHECKED		DATE					
APPROVED		DATE					
PART NO: LCK-WF-GH125W-NP				REV: 04	SCALE: 1:1	UNIT: mm	
DRAWING NO:				SIZE: A4	SHEET: 1/1		