

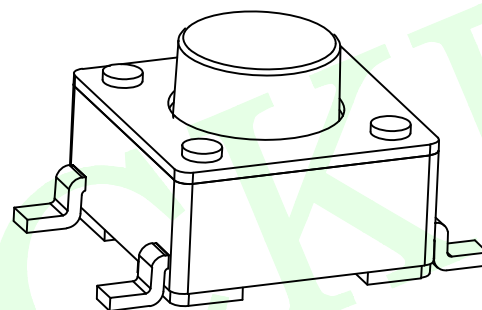




RoHS Compliant

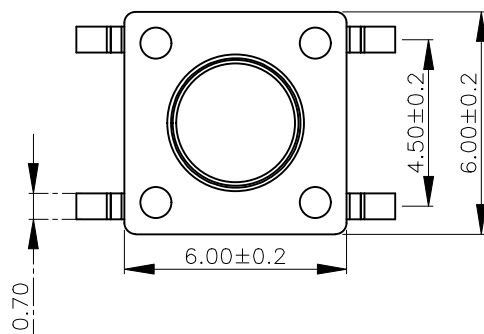

主要技术规格:


1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操作力: $250 \pm 40\text{gf}$
4. 行程: $0.25 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles

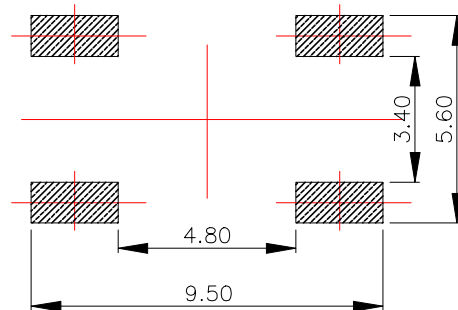

PCB. 焊接图

H

4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5
10.0	10.5
11.0	12.0

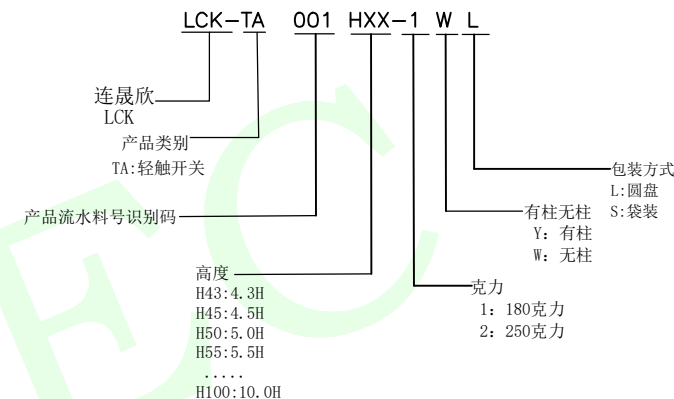

5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温280℃ (黑色)
3	簧片	不锈钢	1	覆银
2	盖板	冷轧钢	1	/
1	按钮	PPA	1	耐温280℃ (黑色)
序号	零件名称	材料规格	数量	备注

QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP
TP
IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	TACRILE SWITCH			
CHECKED		DATE						
APPROVED		DATE						
PART NO: LCK-TA001HXXX-2WL				REV: 04	SCALE: 1:1	UNIT: mm		
DRAWING NO:				SIZE: A4	SHEET: 1/1			