


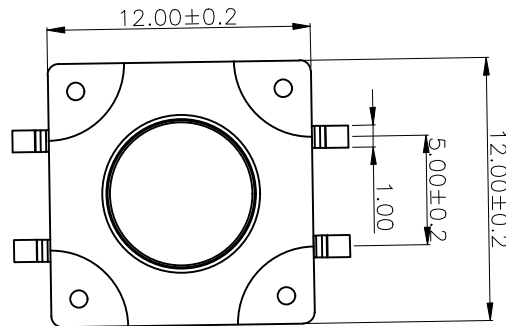
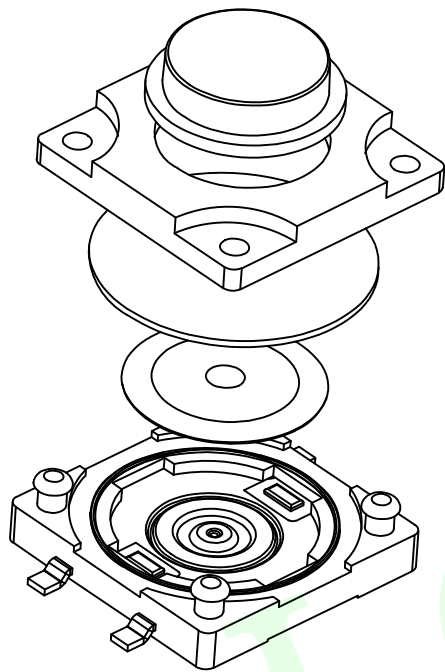


RoHS Compliant

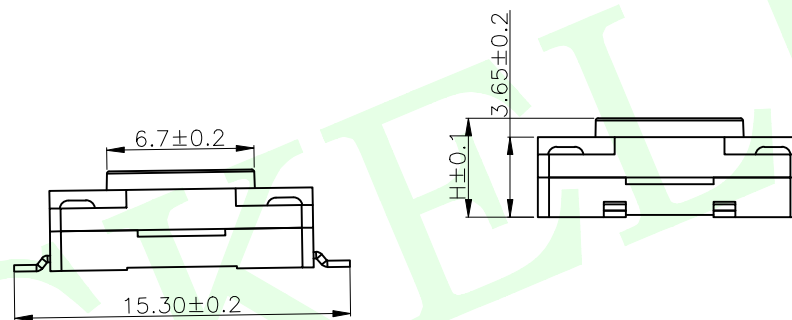

电路图

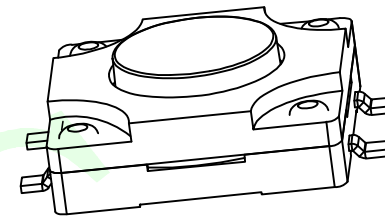

LCK-TA 013 HXX-X X X

联晟欣
LCK
产品类别
TA:轻触开关

产品流水料号识别码

包装方式
L:圆盘
S:袋装


有柱无柱
Y:有柱
W:无柱

克力
1: 180克力
2: 250克力

高度
H43:4.3H
H45:4.5H
H50:5.0H
.....
H150:15.0H

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操作力: $250 \pm 40\text{gf}$
4. 行程: $0.45 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85°C, 90%RH/60H

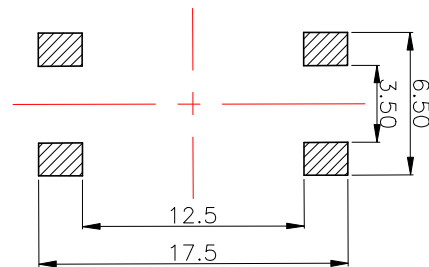

PCB. 焊接图

H	
4.3	4.5
5.0	5.5
6.0	6.5
.....	
13.0	13.5
14.0	15.0

序号	部件名称	材料	备 注
1	底座	PPA	耐温280℃ (黑色)
2	嵌件	黄铜	镀银
3	簧片	不锈钢	覆银
4	按钮	PPA	耐温280℃ (黑色)
5	盖板	冷轧钢	镀锡

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: TACRILE SWITCH		
CHECKED		DATE				
APPROVED		DATE				
PART NO: LCK-TA013HXXX-XXX				REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO:				SIZE: A4	SHEET: 1/1	