
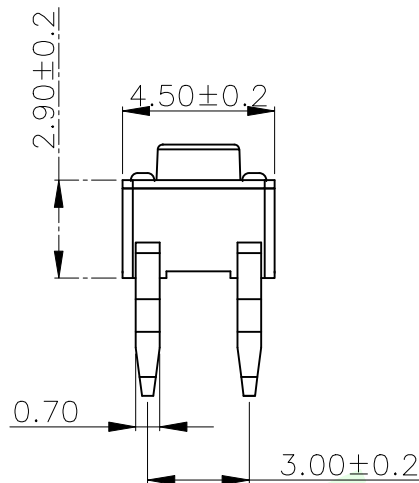
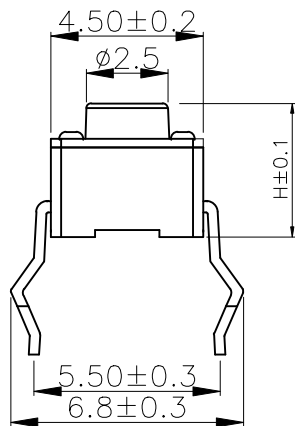


RoHS Compliant

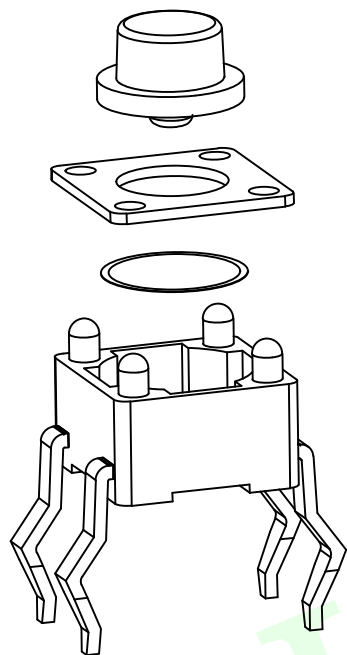

LCK-TA 008 HXX-X X X

联晟欣
LCK
产品类别
TA:轻触开关



产品流水料号识别码

包装方式
L:圆盘
S:袋装

有柱无柱
Y:有柱
W:无柱

克力
1: 180克力
2: 250克力

高度
H35:3.5H
H38:3.8H
H40:4.0H
.....
H100:10.0H

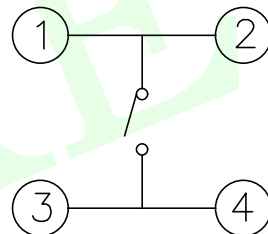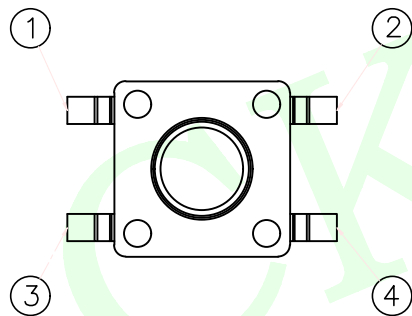


电路图

H	
3.5	3.8
4.0	4.3
4.5	4.8
5.0	6.0
7.0	8.0
9.0	10.0

序号	部件名称	材料	备 注
1	基座	PPA	耐温280℃
2	嵌件	黄铜	镀银
3	簧片	不锈钢	覆银
4	按钮	PPA	耐温280℃
5	盖板	冷轧钢	镀锡

主要技术规格:

- 额 定 值: 50mA DC12V
- 接触电阻: $\leq 100\text{m}\Omega$
- 操 作 力: $160/250 \pm 30\text{gf}$
- 行 程: $0.20 \pm 0.1\text{mm}$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿 命: 100,000 Cycles

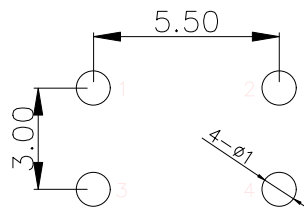

PCB. 焊接图

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN Andy DATE 2014.12.24
CHECKED DATE
APPROVED DATE

PART NO: LCK-TA008HXXX-XXX

DRAWING NO:

TITLE: TACRILE SWITCH

REV: 04 SCALE: 1:1 UNIT: mm

SIZE: A4 SHEET: 1/1