


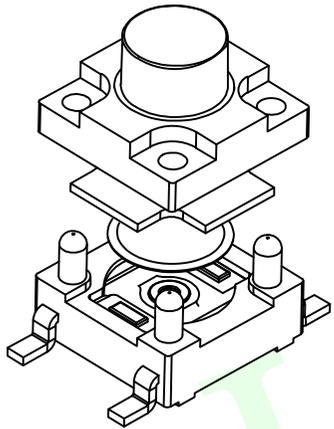

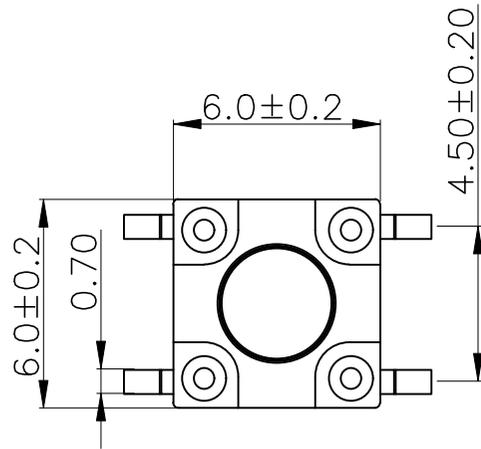


RoHS Compliant

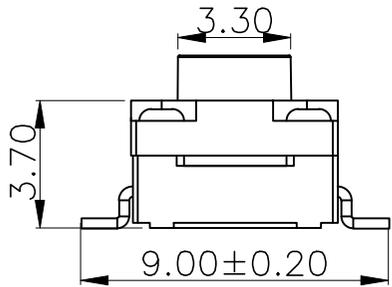

电路图

LCK-TA 015 HXX-X X X

联晟欣 LCK
产品类别
TA:轻触开关

产品流水料号识别码

包装方式
L:圆盘
S:袋装


有柱无柱
Y:有柱
W:无柱

克力
1: 180克力
2: 250克力

高度
H43:4.3H
H45:4.5H
H50:5.0H
.....
H100:10.0H

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $160gf \pm 50gf & 250 \pm 50gf$
4. 行程: $0.3 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85°C, 90%RH/60H

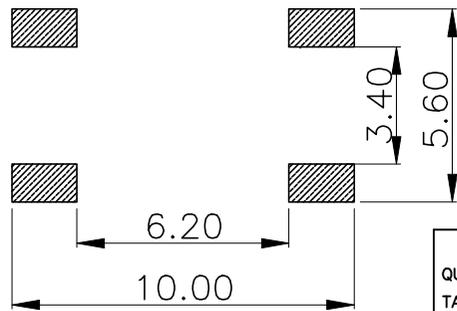

PCB. 焊接图

H	
4.3	4.5
5.0	5.5
6.0	5.5
7.0	7.5
8.0	8.5
9.0	10.0

序号	部件名称	材料	备注
1	按钮	PPA	耐温280°C (黑色)
2	盖板	PPA	耐温280°C (黑色)
3	防水垫	硅胶	耐温280°C (黑色)
4	簧片	不锈钢	覆银
5	基座	PPA	耐温280°C (黑色)
6	引脚、触点	黄铜	镀银

QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3'

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:		
CHECKED		DATE		TACRILE SWITCH		
APPROVED		DATE				
PART NO: LCK-TA015HXXX-XXX				REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO:				SIZE: A4	SHEET: 1/1	