


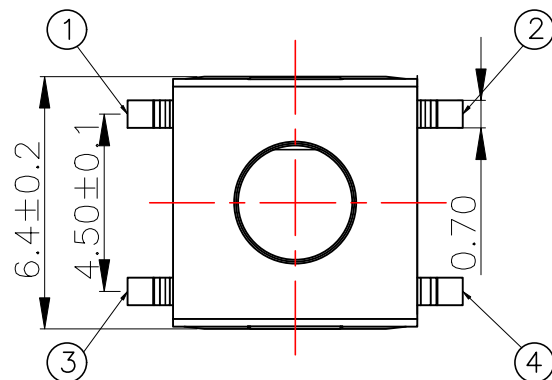

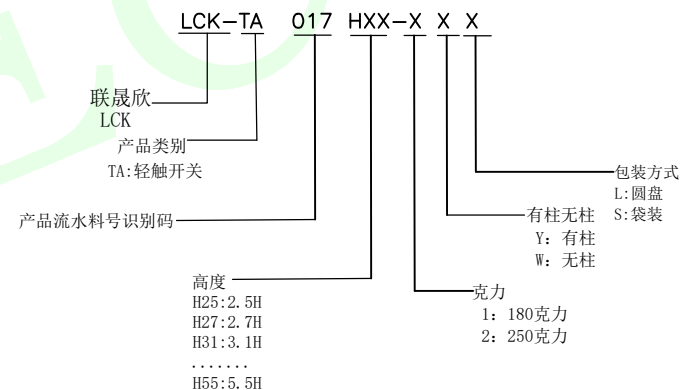
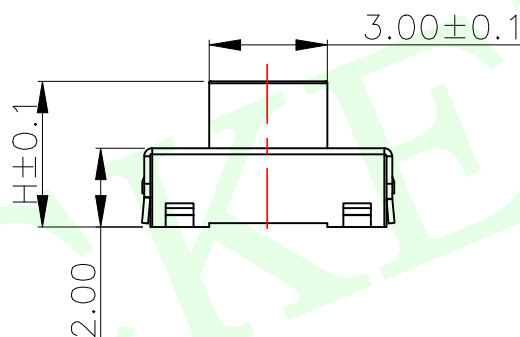


RoHS Compliant

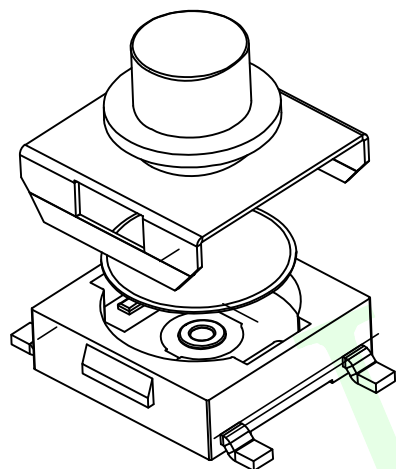


电路图

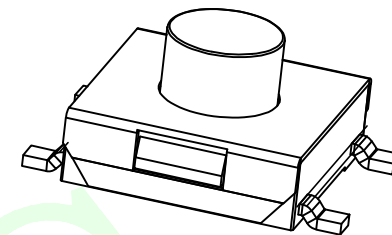

主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: $\leq 100\text{m}\Omega$
- 操作力: $160 \pm 40\text{gf}$
- 行程: $0.25 \pm 0.1\text{mm}$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles

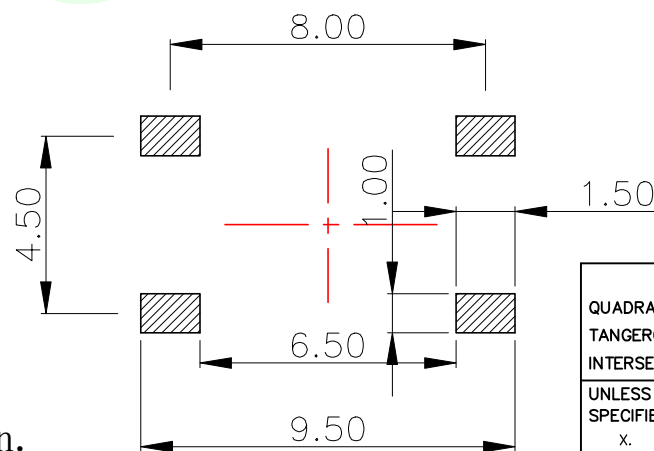

PCB. 焊接图

H	
2.5	2.7
3.1	3.5
3.7	4.0
4.3	4.5
4.8	5.0
5.2	5.5

5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温280℃ (黑色)
3	簧片	不锈钢	1	覆银
2	盖板	不锈钢	1	镀银
1	按钮	PPA	1	耐温280℃ (黑色)
序号	零件名称	材料规格	数量	备注

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: TACRILE SWITCH	
CHECKED		DATE			
APPROVED		DATE			
PART NO: LCK-TA017HXXX-XXX				REV: 04	SCALE: 1:1
DRAWING NO:				SIZE: A4	SHEET: 1/1