


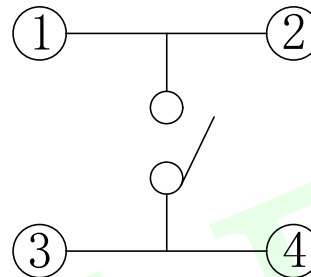
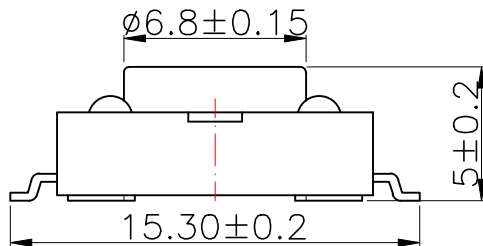


RoHS Compliant

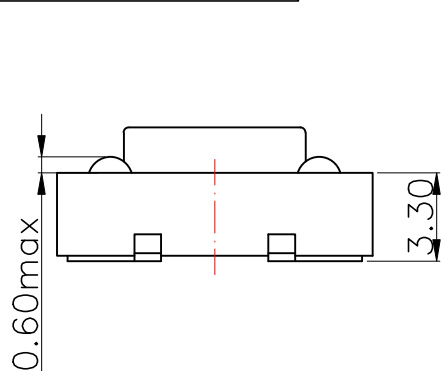

电路图


A	H(高度)
ø6.8	4.3
ø6.8	5.0
ø6.5	6.0
ø6.5	7.0
ø6.0	9.0
ø6.0	8.5
ø6.0	19.0

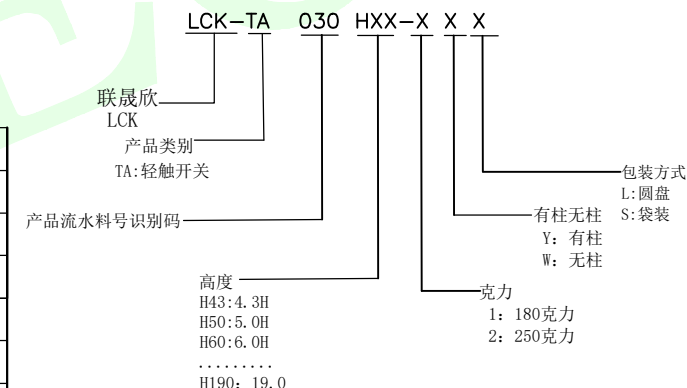

5	嵌件	1	H62Y 黄铜	Ag
4	底座	1	PPA	黑
3	簧片	1	不锈钢	Ag
2	盖板	1	冷轧钢带	Cu/Sn
1	按钮	1	PPA	黑
序号	名称	数量	材料	镀层/颜色

技术参数:

- 使用温度: $-25\sim+85^{\circ}\text{C}$;
- 额定负荷: DC 12V 50mA;
- 接触电阻: $\leq 50\text{m}\Omega$;
- 绝缘电阻: $\geq 100\text{M}\Omega$;
- 耐压: AC250V (50Hz)/min;
- 动作力: $260\pm 50\text{g}$;
- 使用寿命: 100000次;
- 未注尺寸公差参照下面表格。

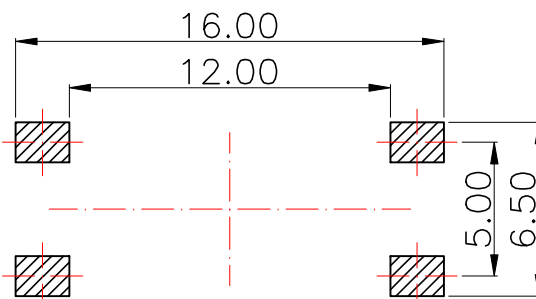

PCB线路板安装图(±0.1)

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°



联晟欣连接器(深圳)有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: TACRILE SWITCH				
CHECKED		DATE						
APPROVED		DATE						
PART NO: LCK-TA030HXXX-XXX				REV: 04	SCALE: 1:1	UNIT: mm		
DRAWING NO:				SIZE: A4	SHEET: 1/1	 		