

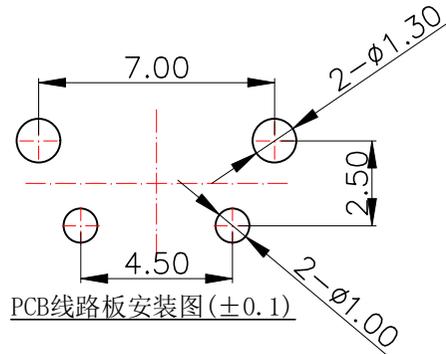
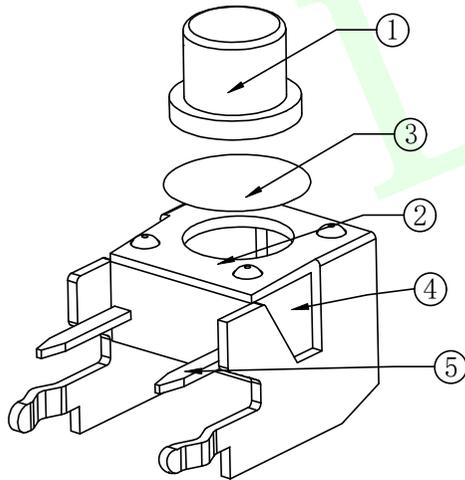
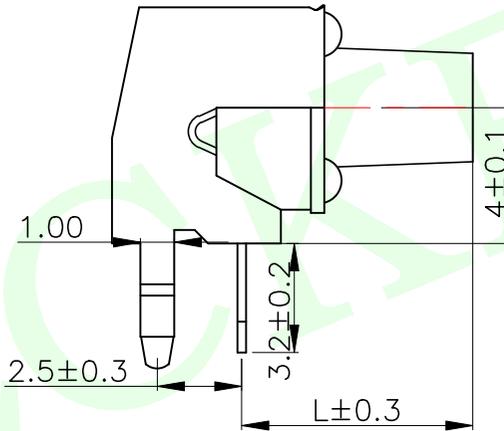
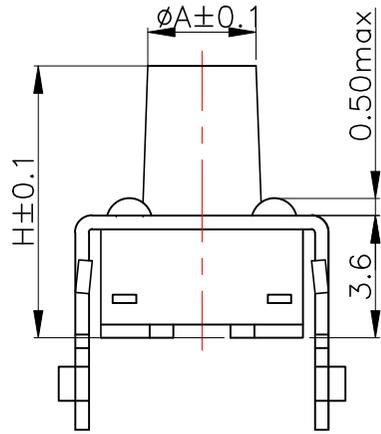


RoHS Compliant

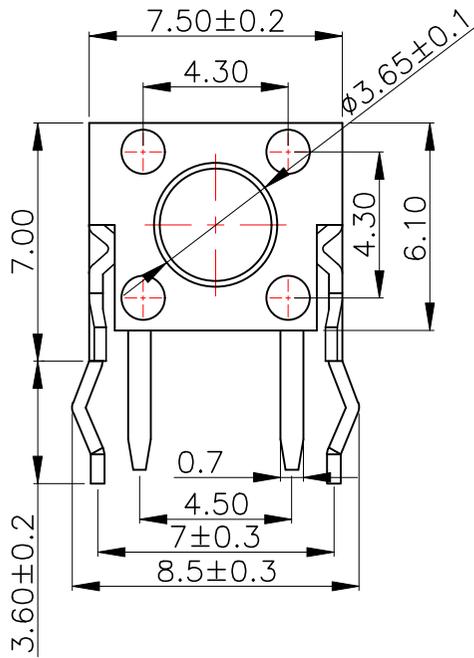


|         |         |         |
|---------|---------|---------|
| 11.85   | 13.0    | ∅3.0    |
| 8.35    | 9.5     | ∅3.0    |
| 7.85    | 9.0     | ∅3.0    |
| 7.35    | 8.5     | ∅3.0    |
| 6.85    | 8.0     | ∅3.2    |
| 6.35    | 7.5     | ∅3.2    |
| 5.35    | 6.5     | ∅3.2    |
| 4.85    | 6.0     | ∅3.3    |
| 4.35    | 5.5     | ∅3.3    |
| 3.85    | 5.0     | ∅3.4    |
| 3.35    | 4.5     | ∅3.5    |
| 高度L(mm) | 帽头H(mm) | 直径A(mm) |

- 技术参数:
- 使用温度:  $-25 \sim +85^{\circ}\text{C}$ ;
  - 额定负荷: DC 12V 50mA;
  - 接触电阻:  $\leq 50\text{m}\Omega$ ;
  - 绝缘电阻:  $\geq 100\text{M}\Omega$ ;
  - 耐压: AC250V (50Hz)/min;
  - 动作力:  $260\text{g} \pm 50\text{g}$ ;
  - 使用寿命: 100000次;



### 电路图

CIRCUIT DIAGRAM

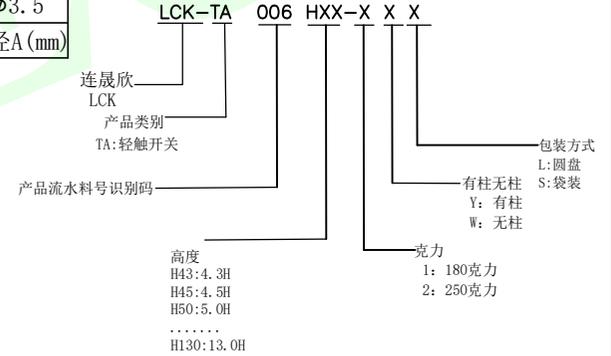

| 5  | 嵌件 | 1  | H62Y | 镀银 |
|----|----|----|------|----|
| 4  | 底座 | 1  | PPA  | 黑色 |
| 3  | 簧片 | 1  | 不锈钢  | 镀银 |
| 2  | 支架 | 1  | 冷轧钢带 | 铜锡 |
| 1  | 帽头 | 1  | PPA  | 黑色 |
| 序号 | 名称 | 数量 | 材料   | 附注 |

QUADRANT POINT (QP)  
TANGENCY POINT (TP)  
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:  
X. ±0.25  
X.x ±0.20  
X.xx ±0.15  
ANGULAR ±3'

联晟欣连接器(深圳)有限公司  
Lianshengxin Connector (Shenzhen) Co., Ltd

|             |                   |      |            |                       |            |          |
|-------------|-------------------|------|------------|-----------------------|------------|----------|
| DESIGN      | Andy              | DATE | 2014.12.24 | TITLE: TACRILE SWITCH |            |          |
| CHECKED     |                   | DATE |            |                       |            |          |
| APPROVED    |                   | DATE |            |                       |            |          |
| PART NO:    | LCK-TA006HXXX-XXX |      |            | REV: 04               | SCALE: 1:1 | UNIT: mm |
| DRAWING NO: |                   |      |            | SIZE: A4              | SHEET: 1/1 |          |