

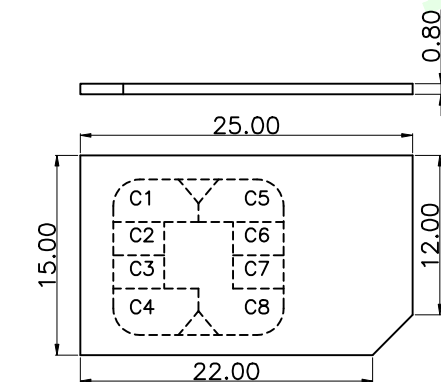
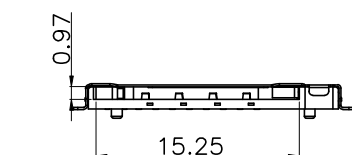
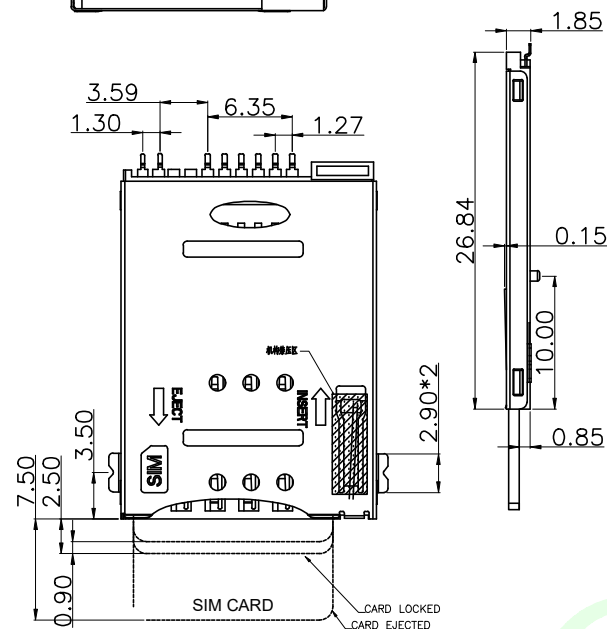


RoHS Compliant



SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

1.SPECIFICATIONS



INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:-55 C+85 C
MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:

INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:

TERMINAL:50u"min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

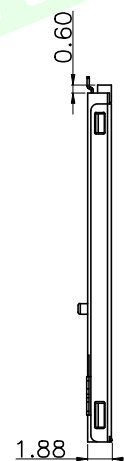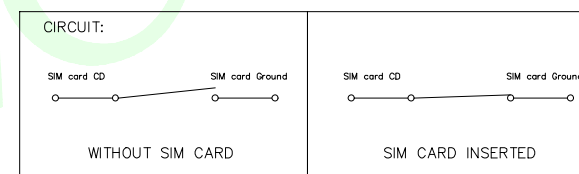

连晟欣
LCK
产品类别
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM
产品流水料号识别码
产品高度
H40: 4.0MM

LCK-MS-201-H188-08-Y-L-G

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘

有柱无柱
Y: 有柱
W: 无柱

产品PIN位
08: 8PIN

MEASURE POINT:

QUADRANT POINT

QUADRANT POINT

TANGERCY POINT

INTERSECTION POINT

UNLESS OTHERWISE

UNLESS OTHERWISE
SPECIFIED TOLERANCE

SPECIFIED, TOLERANCE

X.	±
----	---

X.x	±
-----	---

X.xx	±
------	---

ANGULAR	$\pm$
---------	-------

--	--	--

QP

Q1

Q2

TP

•

•

0.25

0.20

0.15

3°



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:		
CHECKED		DATE		MINI SIM CARD PUSH PUSH 6+2P		
APPROVED		DATE		1.88H断开PIN SMT 有柱		
PART NO: LCK-MS-2011H8808-YLG				REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO: 102022204				SIZE: A4	SHEET: 1/1	 