


RoHS Compliant

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

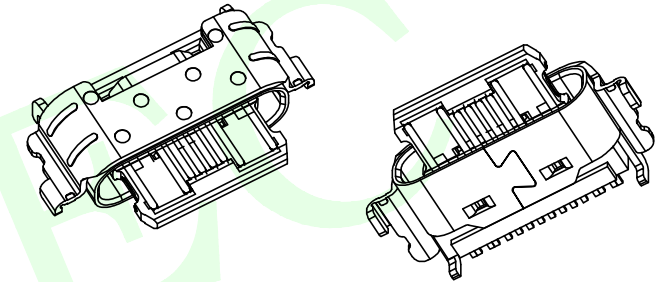

LCK-TCF 822 - LXXX W L- G1

联晟欣
LCK

产品类别

TCF: TYPE C母头

TCM: TYPE C公头

产品流水料号识别码

电镀规格
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘
B: 吸塑盒

有柱无柱 T: 管装
Y: 有柱
W: 无柱

壳长
L635: 6.35

7	COVER SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)


UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°



联晟欣连接器(深圳)有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	USB CF 单排16插板1.00 长6.35mm
CHECKED		DATE			
APPROVED		DATE			
PART NO:	LCK-TCF822-L635WL-G1	REV:	04	SCALE:	1:1
DRAWING NO:	102022127	SIZE:	A4	SHEET:	1/1

RoHS Compliant

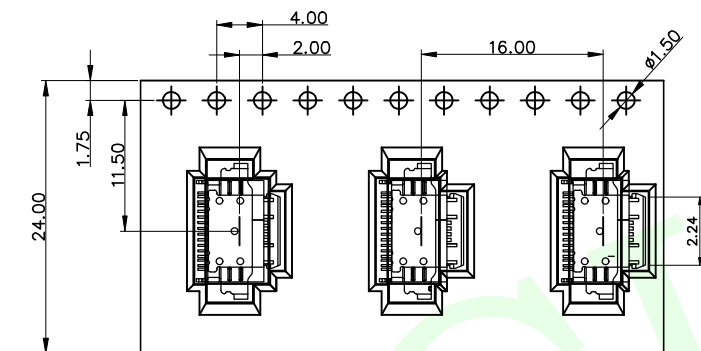

PRODUCT PACKAGING DIRECTION
CUSTOMER TO USE DIRECTION

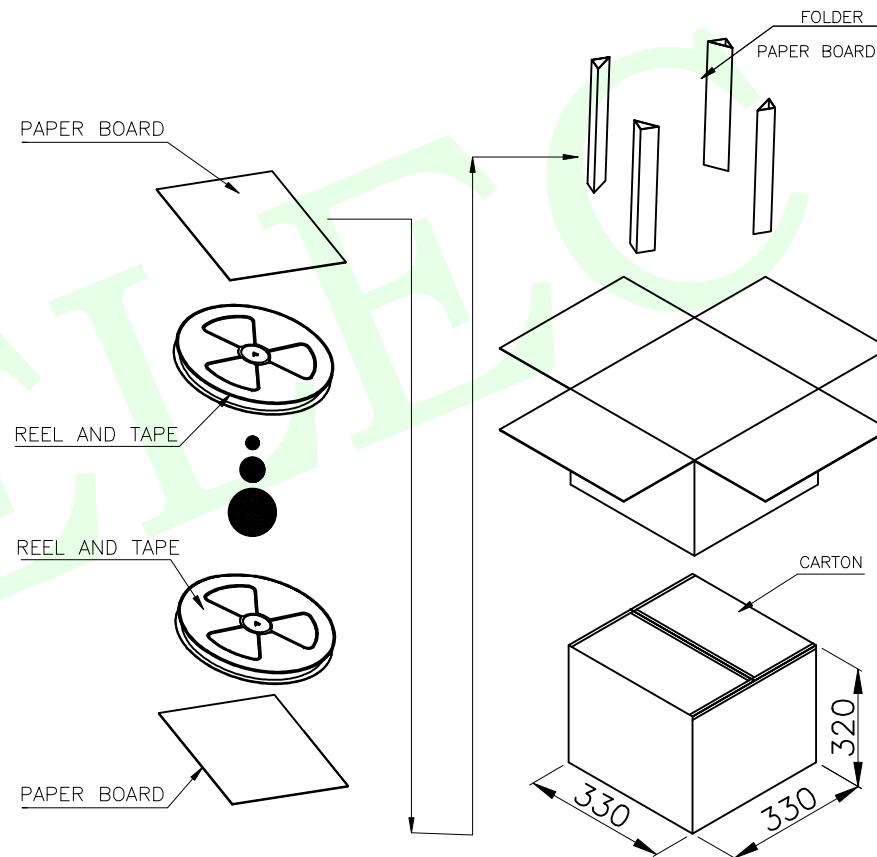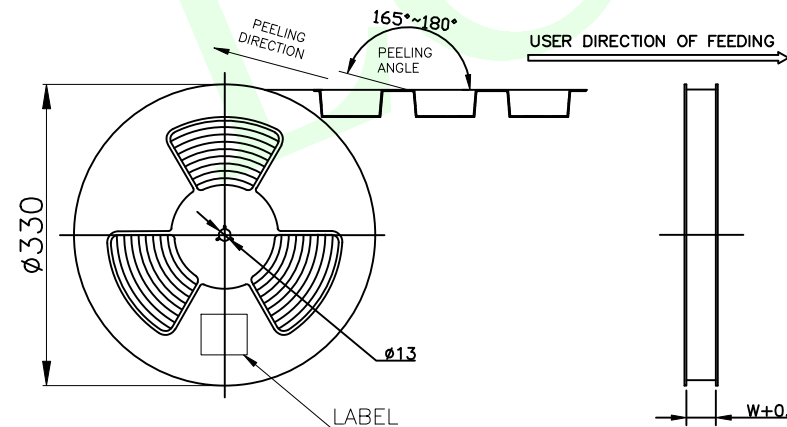

QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP) UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 ANGULAR ±3°	联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd				TITLE: USB CF 单排16沉板1.00 长6.35mm			
	DESIGN	Andy	DATE	2014.12.24	REV: 04			
	CHECKED		DATE		SCALE: 1:1			
	APPROVED		DATE		UNIT: mm			
PART NO: LCK-TCF822-L635WL-G1					REV: 04		SCALE: 1:1	
DRAWING NO: 102022127					SIZE: A4		SHEET: 1/1	