

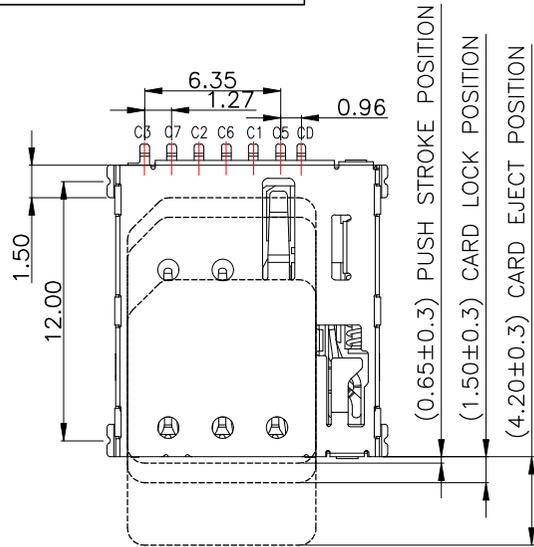


RoHS Compliant

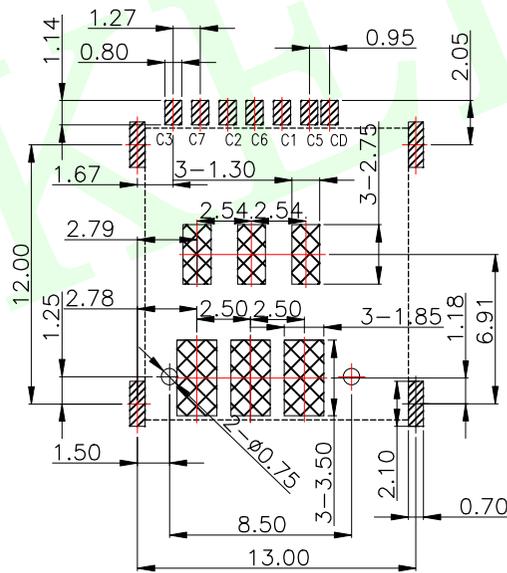

(0.65±0.3) PUSH STROKE POSITION  
 (1.50±0.3) CARD LOCK POSITION  
 (4.20±0.3) CARD EJECT POSITION

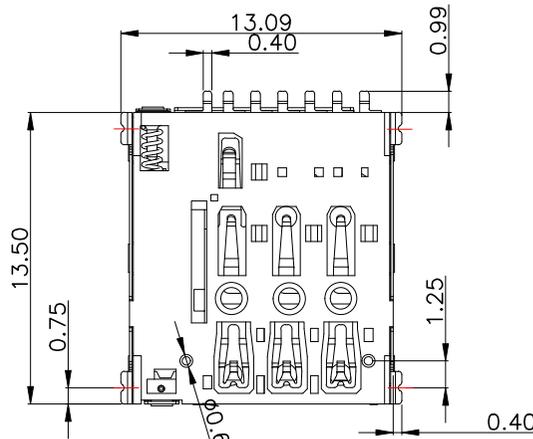


RECOMMENDED PCB LAYOUT  
 GENERAL TOLERANCE ±0.05

PAD  
 KEEP OUT AREA


NOTES:

- 1) MATERIAL:  
 HOUSING: HI-TEMP. PLASIC UL 94V-0  
 CONTACT: COPPER ALLOY  
 SHELL: STAINLESS STEEL
- 2). PLATING :  
 TERMINAL:  
 CONTACT AREA: Au GOLD FLASH.  
 SOLDER AREA: AU GOLD FLASH.  
 UNDER PLATE: NICKEL.  
 SHELL: NICKEL PLATED OVER ALL.  
 SOLDER AREA: GOLD FLASH.
3. SPECIALITY:  
 3.1 Rated current: 1.0A  
 3.2 Rated voltage: 30V  
 3.3 Contact Resistance: 100mΩ MAX  
 3.4 Insulation Resistance: 1000MΩ MIN 500V DC  
 3.5 Dielectric withstanding voltage: 500V AC.  
 3.6 Solder ability: 260±0/-5°C, 30±10s.  
 3.7 Durability: 5000 Cycles Min.  
 3.8 Operating condition: Temperature -40°C ~ +85°C;  
 Humidity 80% R.H MAX

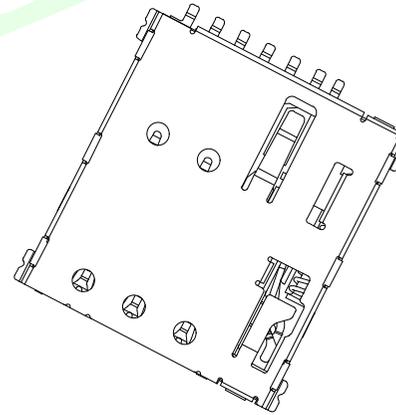

3D VIEW

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

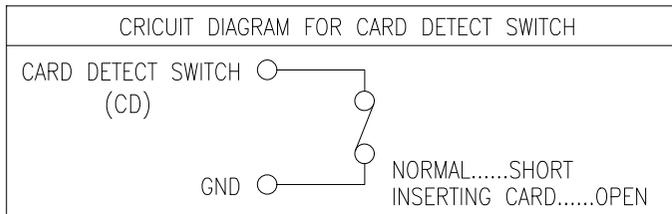

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	  	 联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd	
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	DESIGN: Andy CHECKED: APPROVED: PART NO: LCK-NSNO-1303-Y DRAWING NO:	DATE: 2014.12.24 DATE: DATE: REV: 04 SCALE: 1:1 UNIT: mm	TITLE: 6+1PIN 137H NANO SIM CARD CONNECTOR SIZE: A4 SHEET: 1/1