

RoHS Compliant










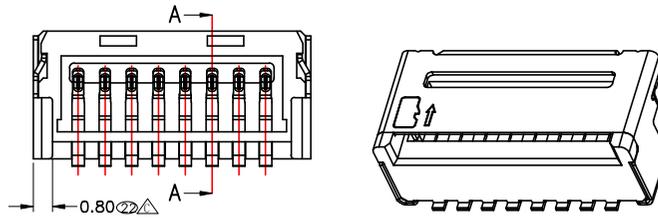


TABLE A:

规格	DIM A	DIM B	料号
H3.80	3.80	2.25	LCK-TF109H3808-WLG
H3.25	3.25	1.70	LCK-TF109H32508-WLG
H5.0	5.0	3.45	LCK-TF109H5008-WLG
H2.55	2.55	1.0	LCK-TF109H25508-WLG
H3.0	3.0	1.45	LCK-TF109H3008-WLG
H1.7	1.7	0.15	LCK-TF109H1708-WLG
H4.5	4.5	2.95	LCK-TF109H4508-WLG

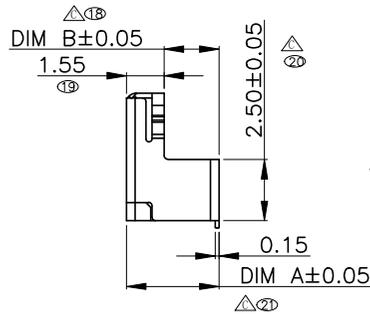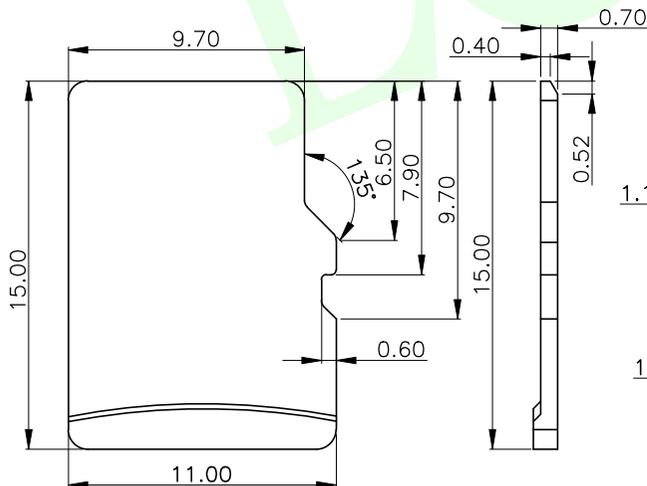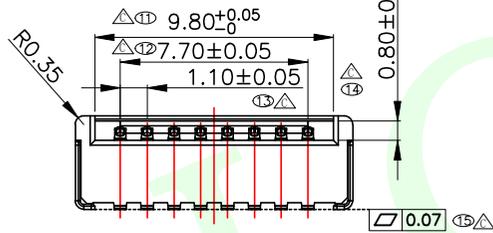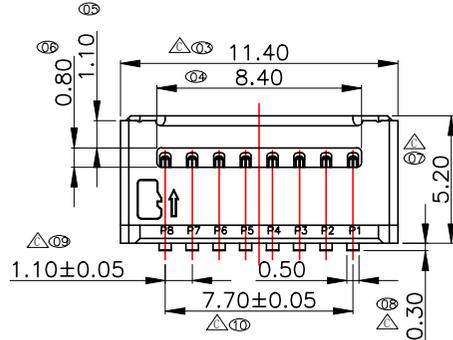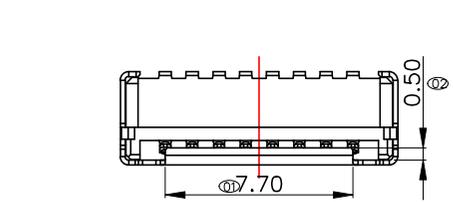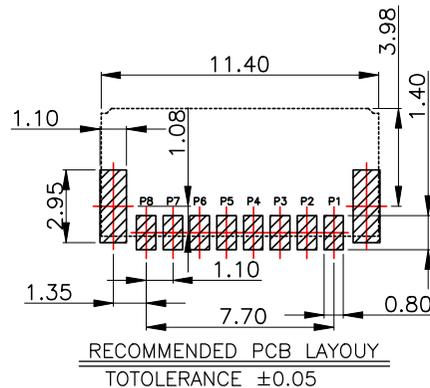

PIN NO.	NAME
P1	DAT 2
P2	CD/DAT
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1

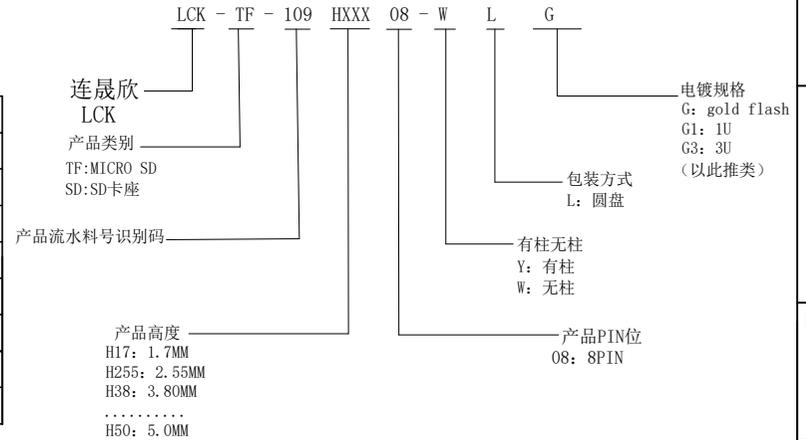

- 注解:
1. 素材要求:
 - 1.1 胶芯: LCP 30%GF, 防火等级: UL94V-0. 颜色: 黑色;
 - 1.2 端子: C5191-H, T=0.15MM
 - 1.3 外壳: SUS201 1/2H, T=0.20MM
 2. 电镀要求:
 - 2.1 端子: 接触区镀金1U", 焊脚区域镀雾锡100~120U", 全部区域电镀镍底50U".
 3. 电气性能要求:
 - 3.1 额定电流 1.0A, 额定电压 30V
 - 3.2 耐压交流电压最小100VAC.
 - 3.3 绝缘电阻最小100M 欧姆.
 - 3.4 接触电阻最大50毫欧.
 4. 环境性能要求:
 - 4.1 使用环境-30摄氏度~80摄氏度
 - 4.2 部件耐热焊接温度符合230摄氏度30~60秒, 260摄氏度10秒要求.
 5. "△" 为QC重点量测尺寸
 6. "⊗" 为FAI量测尺寸
 7. 部件符合RHOS 2005/95/EC.

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd			
	DESIGN	Andy	DATE	2014.12.24
	CHECKED		DATE	
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	PART NO: LCK-TF-109HXXX08-WLG		TITLE: MICRO SD 避空短体TF卡座1.7/5.0H	
X. ±0.25	APPROVED	DATE	REV: 04	SCALE: 1:1
X.x ±0.20	DRAWING NO: 102022322		UNIT: mm	
X.xx ±0.15	SIZE: A4		SHEET: 1/1	
ANGULAR ±3'				