

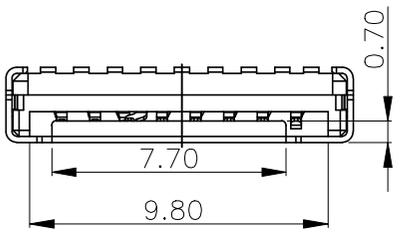


RoHS Compliant





- 注解:
- 素材要求:
 - 1.1 胶芯: LCP 30%GF, 防火等级: UL94V-0. 颜色: 黑色;
 - 1.2 端子: C5191-H, T=0.15MM
 - 1.3 外壳: SUS201 1/2H, T=0.20MM
 - 电镀要求:
 - 2.1 端子: 接触区镀金1U", 焊脚区域镀雾锡100~120U", 全部区域电镀镍底50U".
 - 电气性能要求:
 - 3.1 额定电流 1.0A. 额定电压 30V
 - 3.2 耐压交流电压最小100VAC.
 - 3.3 绝缘电阻最小100M 欧姆.
 - 3.4 接触电阻最大50毫欧.
 - 环境性能要求:
 - 4.1 使用环境-30摄氏度~80摄氏度
 - 4.2 部件耐热焊接温度符合230摄氏度30~60秒, 260摄氏度10秒要求.
 - "△" 为QC重点量测尺寸
 - "⊗" 为FAI量测尺寸
 - 部件符合RHOS 2005/95/EC.

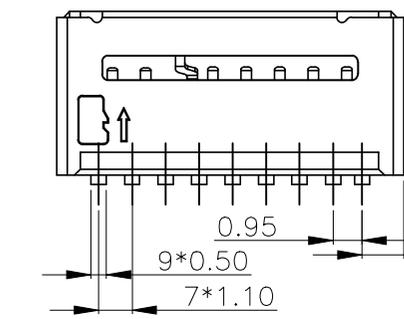

DIM B±0.05

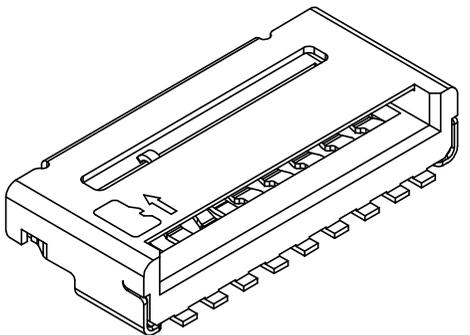


DIM A±0.05

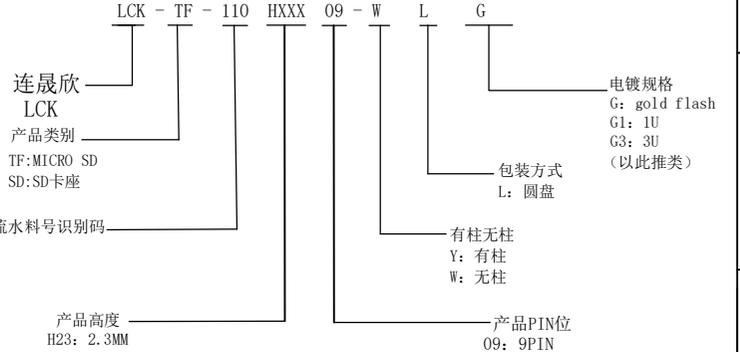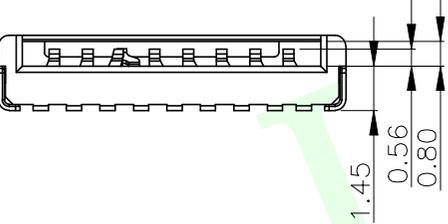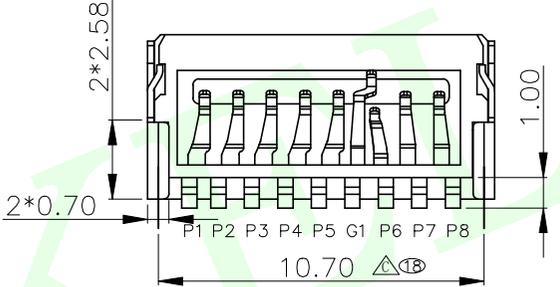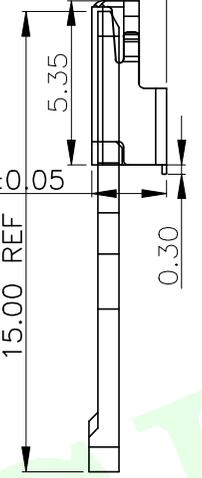

pin number	pin name
G1	switch
pin 8	RSV
pin 7	DO
pin 6	VSS
pin 5	SCLK
pin 4	VDD
pin 3	DI
pin 2	CS
pin 1	RSV

TABLE A:

规格	DIM A	DIM B	料号
H2.3	2.3	0.75	LCK-TF-110H2309-WLG
H2.45	2.45	0.9	LCK-TF-110H24509-WLG

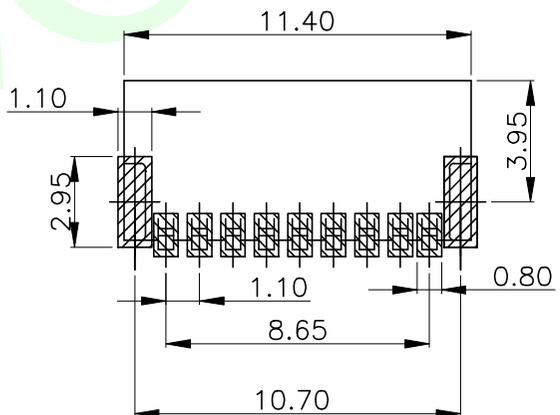

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 ANGULAR ±3'

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MICRO SD 避空短体TF卡2.3H有侦测PIN	
CHECKED		DATE				
APPROVED		DATE				
PART NO:	LCK-TF-110HXXX09-WLG			REV: 04	SCALE: 1:1	UNIT: mm
DRAWING NO:				SIZE: A4	SHEET: 1/1	