

RoHS Compliant

无侦测PIN

-NOTES-

1.Electrical:

Contact resistance:50m ohms max.
Dielectric withstanding voltage:500V RMS.
Insulation resistance:1000M ohms min.

2.Mechanical:

MATE AND UNMATE FORCE:
MATE FORCE:4.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:1500cycles MIN.

3.Environment:





Operating Temperature:-25'to+85°.

4.FINISH:

TERMINAL: GOLD Plated Over NICKEL
Contact area,TIN ON
SOLDER TAIL AREA& TIN
Plated ALL Over NICKEL.
Shell: SPCC WITH NICKEL&GOLD Plated.


5.COLOR:

HOUSING:BLACK.

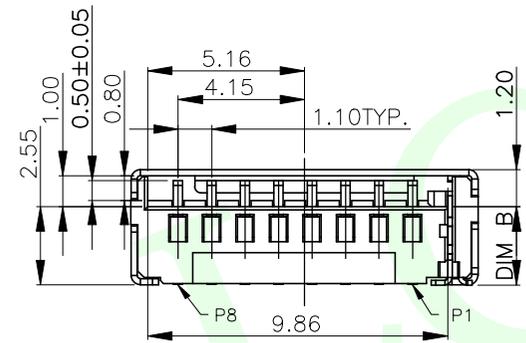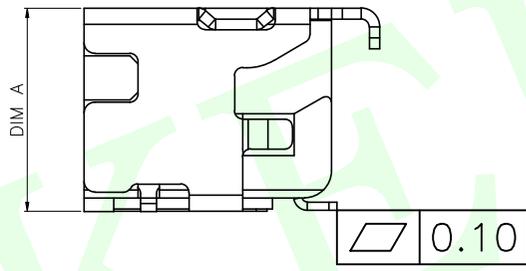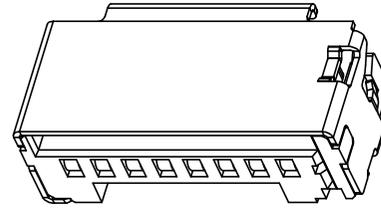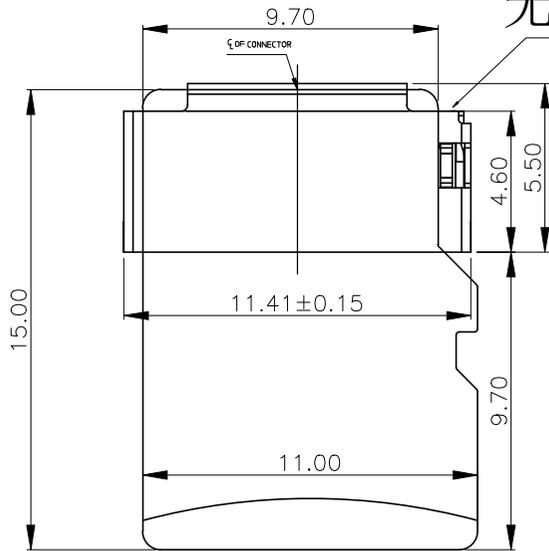

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

序号	DIM A	DIM B	料号
1	3.0	1.86	LCK-TF-111H3008-WLG
2	3.35	2.16	LCK-TF-111H33508-WLG
3	3.75	2.56	LCK-TF-111H37508-WLG
4	2.85	1.65	LCK-TF-111H28508-WLG

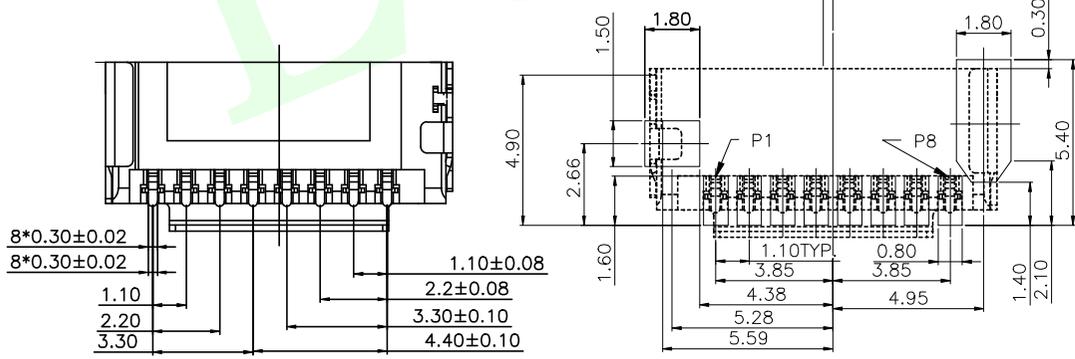

RECOMMENDED PCB LAYOUT
TOLERANCES ±0.05

MEASURE POINT: QP
QUADRANT POINT TP
TANGENCY POINT IP
INTERSECTION POINT

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

DESIGN	Andy	DATE	2014.12.24	TITLE:	T-FLASH 短体卡座无侦测PIN2.55/3.75		
CHECKED		DATE					
APPROVED		DATE					
PART NO:	LCK-TF-111HXXX08-WLG			REV:	04	SCALE:	1:1
DRAWING NO:				UNIT:	mm		
				SIZE:	A4	SHEET:	1/1