


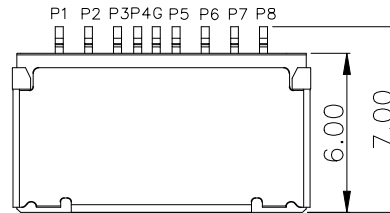
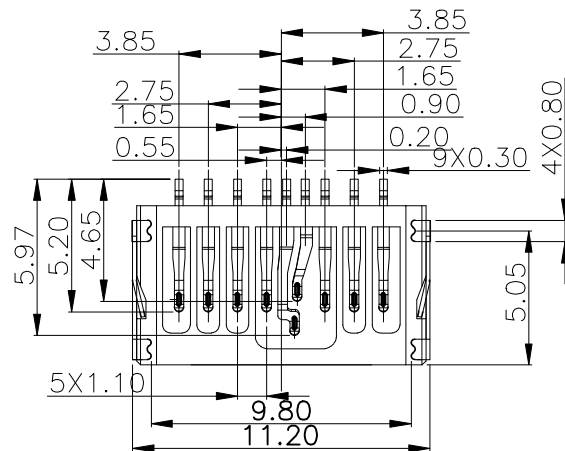
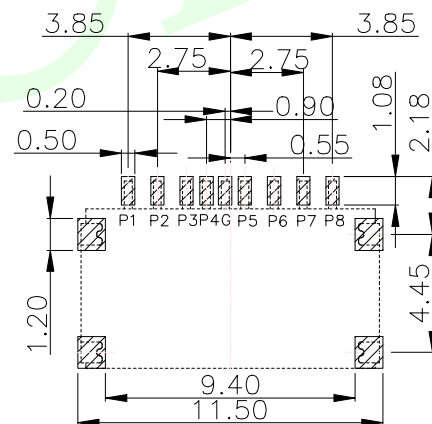



RoHS Compliant

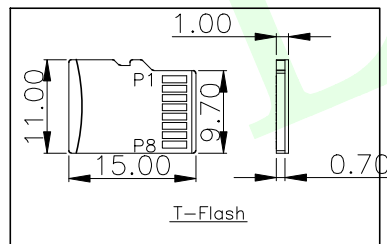

pin number	pin name
G1	switch
pin 8	RSV
pin 7	DO
pin 6	VSS
pin 5	SCLK
pin 4	VDD
pin 3	DI
pin 2	CS
pin 1	RSV

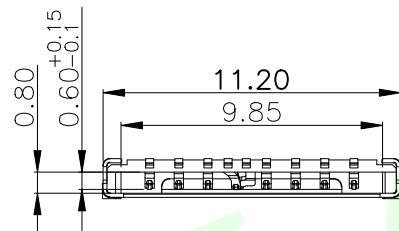

RECOMMENED P.C.BOARD
LAYOUT GENERAL TOLERANCE ± 0.05

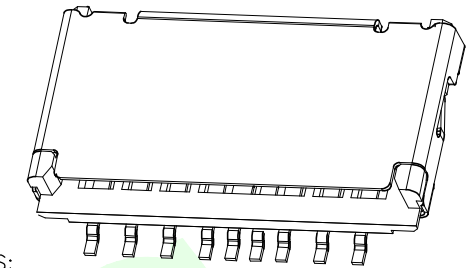

NOTES:

1. MATERIAL:

- 1.1 Housing: High Temperature Thermoplastic UL94V-0; Color Black.
- 1.2 Terminal: Copper Alloy.
- 1.3 Shell: Stainless Steel.

2. SPECIALITY:

- 2.1 Rated current: 0.5A
- 2.2 Rated voltage: 30V
- 2.3 Contact Resistance: 50mΩ MAX
- 2.4 Insulation Resistance: 100MΩ MIN 100V


DC

- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Solder ability: 235±5°C, 5±0.5s.
- 2.7 Durability: 5000 Cycles Min.
- 2.8 Operating condition: Temperature -40°C ~ +85°C;

Humidity 80% R.H MAX

3. PLEASE CONTACT JITS SALES

REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

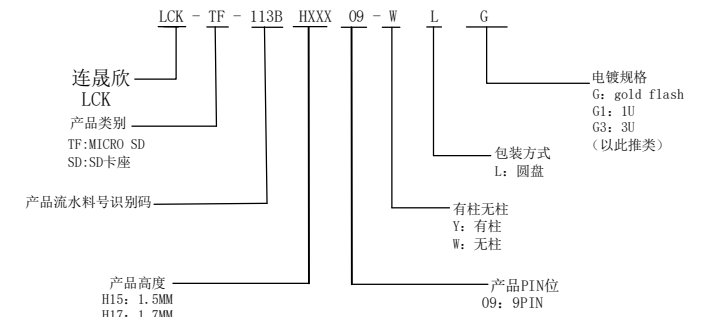

MEASURE POINT:

QUADRANT POINT QP

TANGENCY POINT TP

INTERSECTION POINT IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°



DESIGN	Andy	DATE	2014.12.24	TITLE: MicroSD卡(TF卡) 卡座 短体9P 中间检测 1.5/1.7H			
CHECKED		DATE					
APPROVED		DATE					
PART NO: LCK-TF-113BHXXX09-WLG				REV: 04	SCALE: 1:1	UNIT: mm	
DRAWING NO:				SIZE: A4	SHEET: 1/1		