


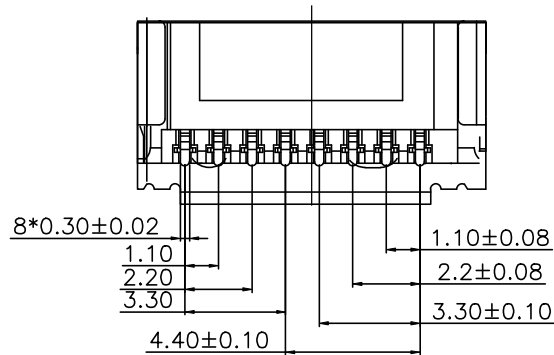
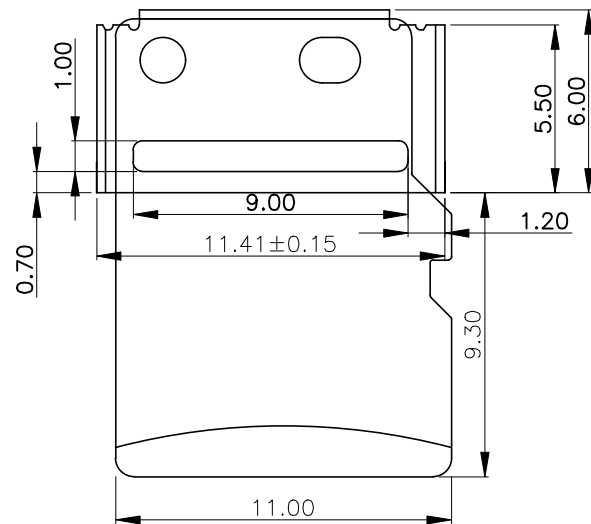
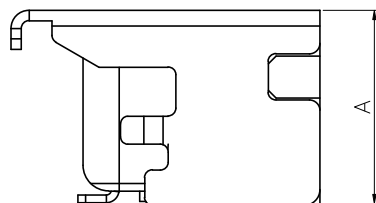


RoHS Compliant

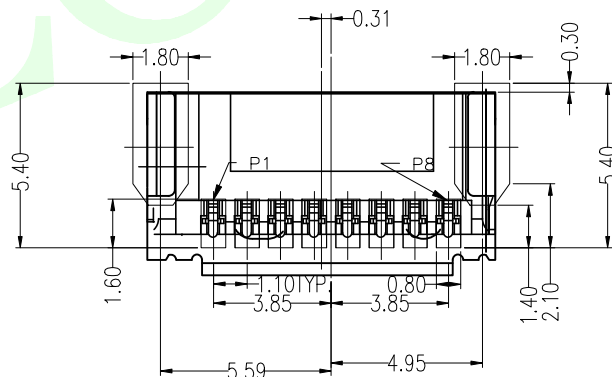

序号	DIM A	DIM B	料号
1	3.75	2.56	LCK-TF-112H37508-WLG
2			
3			

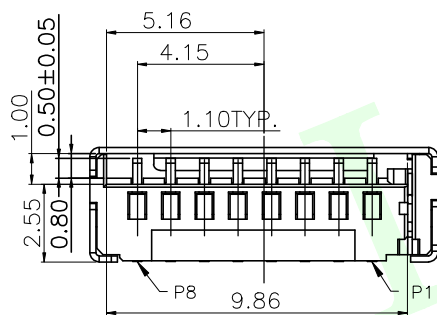

RECOMMENDED PCB LAYOUT
TOLERANCES ±0.05

—NOTES—

1.Electrical:

Contact resistance:50m ohms max.
Dielectric withstanding voltage:500V RMS.
Insulation resistance:1000M ohms min.

2.Mechanical:

MATE AND UNMATE FORCE:
MATE FORCE:4.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:1500cycles MIN.

3.Environment:

Operating Temperature:−25°to+85°.


4.FINISH:

TERMINAL: GOLD Plated Over NICKEL
Contact area,TIN ON
SOLDER TAIL AREA& TIN
Plated ALL Over NICKEL.
Shell: SPCC WITH NICKEL&GOLD Plated.

5.COLOR:

HOUSING:BLACK.

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

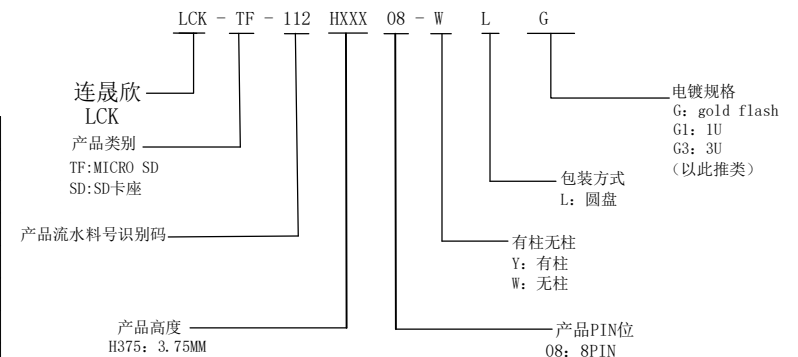

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X.	±0.25
X.x	±0.20
X.xx	±0.15
ANGULAR	±3°

QP

TP

IP



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	T-FLASH 短卡座无侦测PIN有孔3.75
CHECKED		DATE			
APPROVED		DATE			
PART NO:	LCK-TF-112H37508-WLG	REV:	04	SCALE:	1:1
DRAWING NO:		SIZE:	A4	SHEET:	1/1