

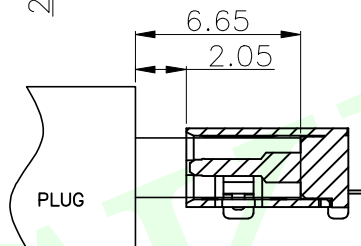
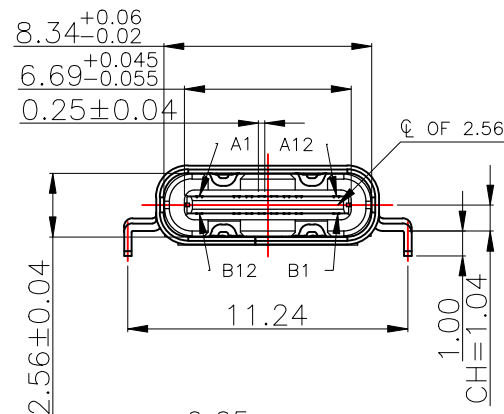
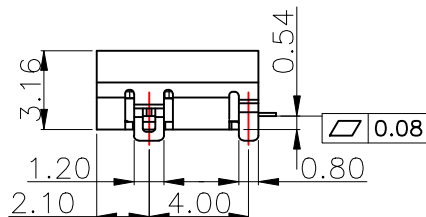
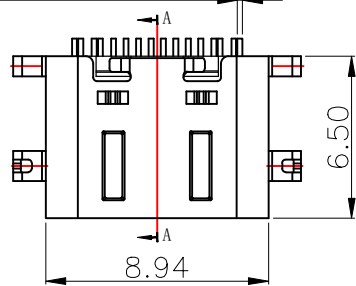
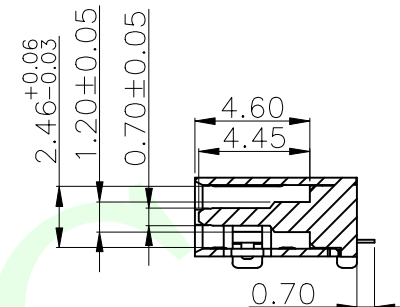
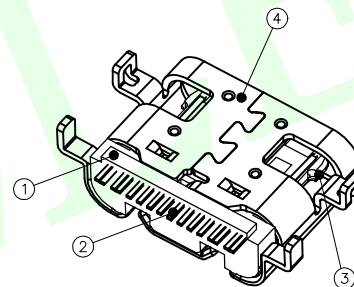


RoHS Compliant

0.20±0.05(16X)

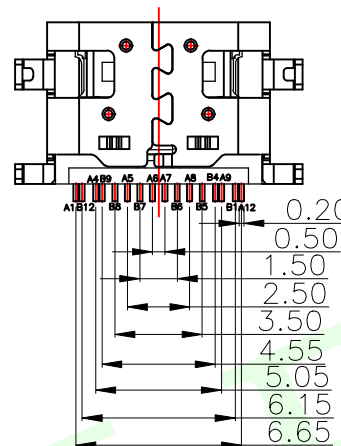

AFTER MATING

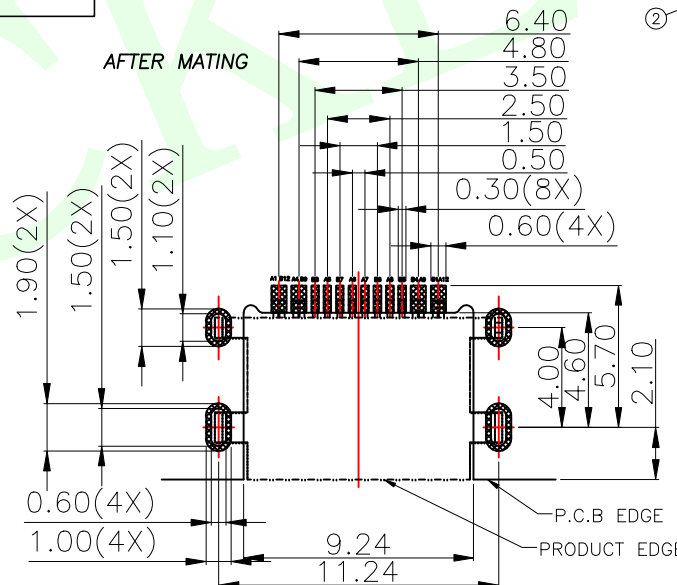

SECTION:A-A

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

- NOTE:
- 1.MATERIAL SPECIFICATION:
1.HOUSING:PA9T,UL94 V-0.
2.TERMINAL: COPPER ALLOY(C18150)
3.MID PLATE: STAINLESS STEEL(SUS301)
4.FRONT SHELL: STAINLESS STEEL(SUS304)
 - 2.PLATING SPECIFICATION:
2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
2-3.MID PLATE:
CLEAR ONLY
 - 3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
 - 4.ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mA/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mA.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 - 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

LCK-TCF 801-CXXX W L- Gx

连晟欣
LCK

产品类别
TCF:TYPE C母头
TCM:TYPE C公头

产品流水料号识别码

沉板深度
C54:0.54
C08:0.8
C10:1.0
C13:1.3
C16:1.6
C186: 1.86
C210:2.10

电镀规格
G1: 1U
G3: 3U
(以此类推)

包装方式
L:圆盘
B:吸塑盒

有柱无柱 T:管装
Y: 有柱
W: 无柱

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器(深圳)有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN Andy DATE 2014.12.24 TITLE: TYPE C CF 16P单排L6.5沉板0.54/0.8

CHECKED DATE TYPE C CF 16P单排L6.5沉板0.54/0.8





APPROVED DATE 1.0/1.3/1.6/1.86/2.1

PART NO: LCK-TCF801-CXXWL-GX REV: 04 SCALE: 1:1 UNIT: mm




DRAWING NO: 102022109 SIZE: A4 SHEET: 1/1

RoHS Compliant


0.20±0.05(16X)

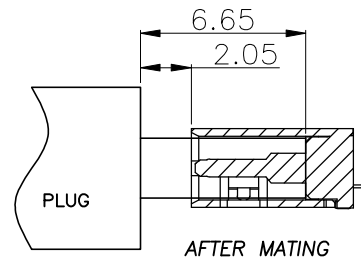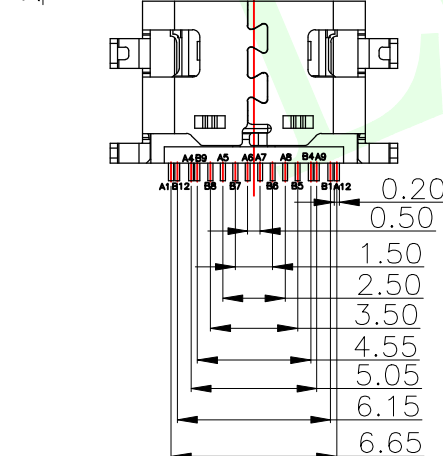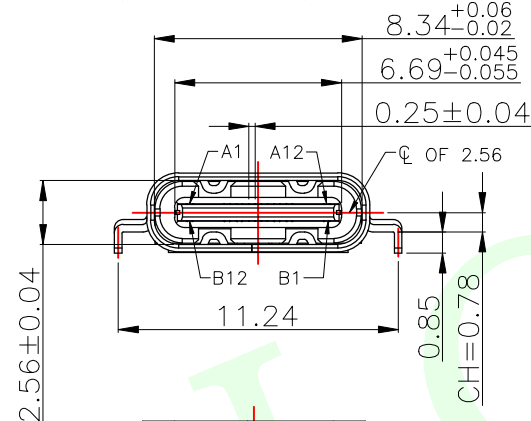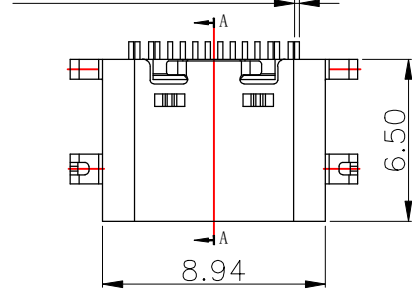

AFTER MATING

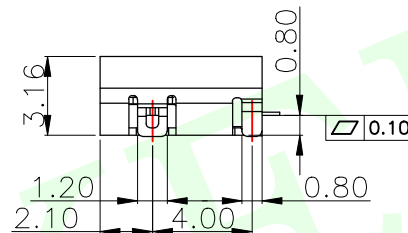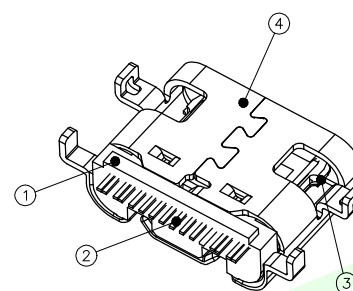

SECTION:A-A

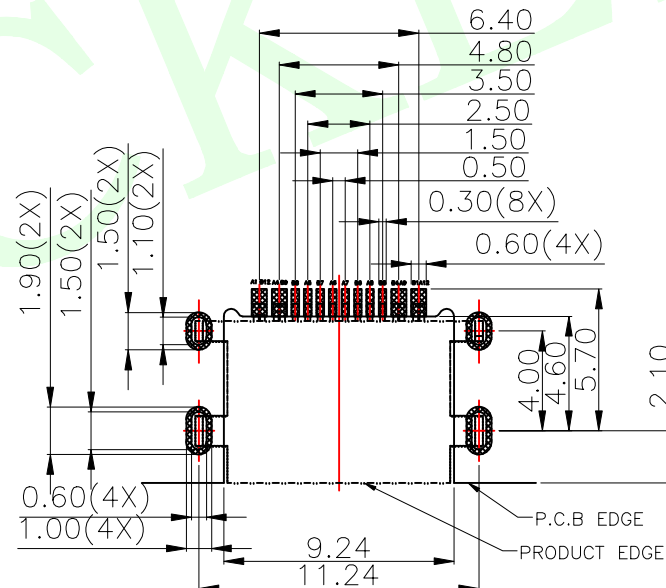

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:PA9T,UL94 V-0.
 - 2.TERMINAL: COPPER ALLOY(C18150)
 - 3.MID PLATE: STAINLESS STEEL(SUS301)
 - 4.FRONT SHELL: STAINLESS STEEL(SUS304)
- 2.PLATING SPECIFICATION:
 - 2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
 - 2-3.MID PLATE:
CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
 - 4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mA.
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
- 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

UNLESS OTHERWISE

SPECIFIED,TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

ANGULAR ±3°

QP

TP

IP






联晟欣连接器(深圳)有限公司

Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:
CHECKED		DATE		TYPE C CF 16P单排L6.5沉板0.54/0.8
APPROVED		DATE		1.0/1.3/1.6/1.86/2.1
PART NO:	LCK-TCF801-CXXWL-GX	REV:	04	SCALE: 1:1
DRAWING NO:	102022109	SIZE:	A4	SHEET: 1/1

RoHS Compliant

0.20±0.05(16X)

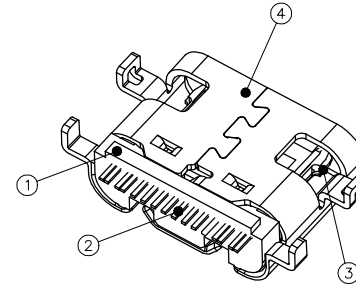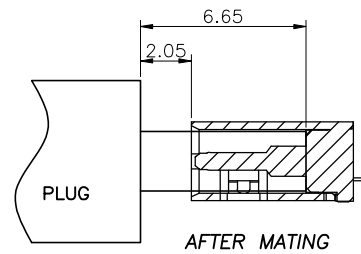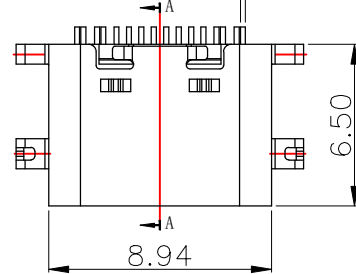

NOTE:

1.MATERIAL SPECIFICATION:

1.HOUSING:PA9T,UL94 V-0.

2.TERMINAL: COPPER ALLOY(C18150)

3.MID PLATE: STAINLESS STEEL(SUS301)

4.FRONT SHELL: STAINLESS STEEL(SUS304)

2.PLATING SPECIFICATION:

2-1.TERMINAL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2.FRONT SHELL:

PLATING SPECIFICATIONS FOLLOW THE P/N

2-3.MID PLATE:

CLEAR ONLY

3.MECHANICAL PERFORMANCE:

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.

3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)

CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;

1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.

4-2. LLCR:

VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.

LLCR MAX. CHANGE OF ALL PINS: 10mA.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:


OPERATING TEMPERATURE: -25°C~+85°C.

6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL


BE MAINTAINED FOR 10 SECONDS AT 260°C.

8.34^{+0.06}_{-0.02}
6.69^{+0.045}_{-0.055}




0.25±0.04

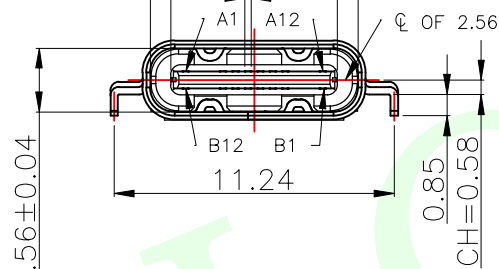

1.20±0.05
0.70±0.05



SECTION:A-A

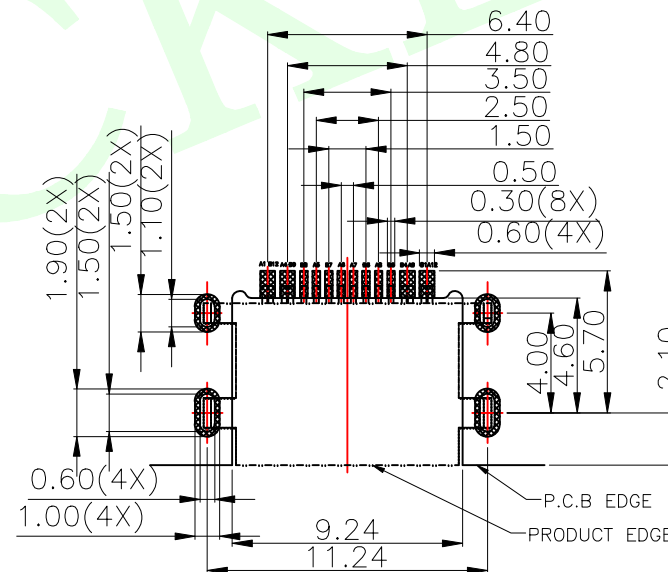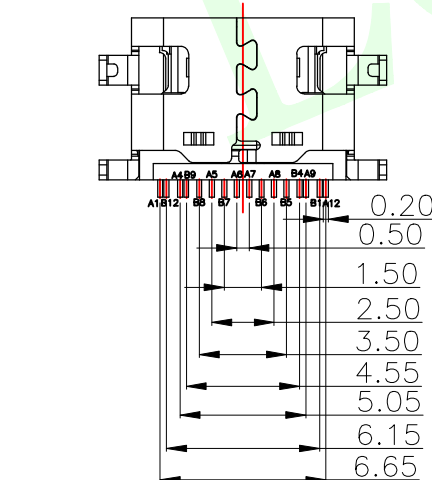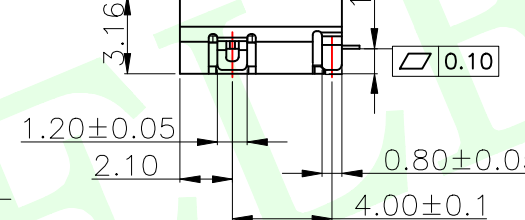

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MEASURE POINT:

QUADRANT POINT (QP)

TANGENCY POINT (TP)

INTERSECTION POINT (IP)

UNLESS OTHERWISE

SPECIFIED,TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

ANGULAR ±3°




联晟欣连接器(深圳)有限公司

Lianshengxin Connector (Shenzhen) Co., Ltd


DESIGN	Andy	DATE	2014.12.24	TITLE:
CHECKED		DATE		TYPE C CF 16P单排L6.5沉板0.54/0.8
APPROVED		DATE		1.0/1.3/1.6/1.86/2.1
PART NO:	LCK-TCF801-CXXWL-GX	REV:	04	SCALE: 1:1
DRAWING NO:	102022109	SIZE:	A4	SHEET: 1/1

RoHS Compliant

0.20±0.05(16X)


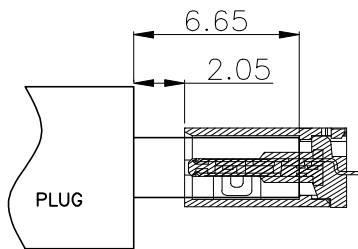


AFTER MATING






NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:PA9T,UL94 V-0.
 - 2.TERMINAL: COPPER ALLOY(C18150)
 - 3.MID PLATE: STAINLESS STEEL(SUS301)
 - 4.FRONT SHELL: STAINLESS STEEL(SUS304)
- 2.PLATING SPECIFICATION:
 - 2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
 - 2-3.MID PLATE:
CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
 - 4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mA.
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
- 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

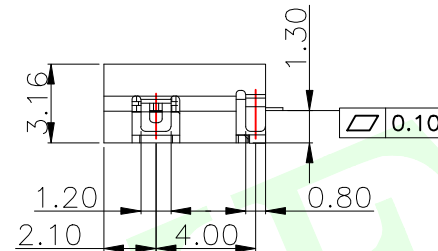

SECTION:A-A

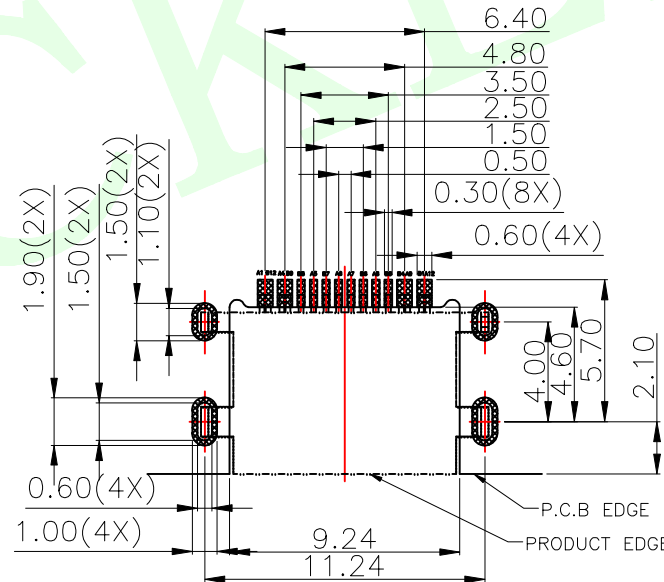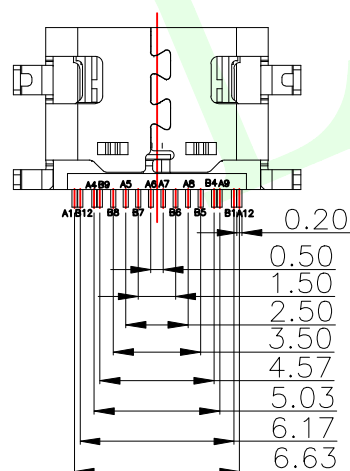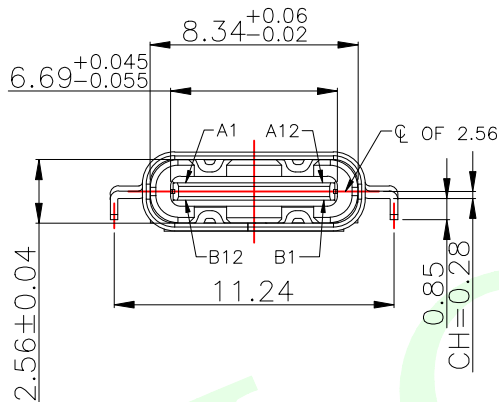

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

UNLESS OTHERWISE

SPECIFIED,TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

ANGULAR ±3°

QP

TP

IP



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN

Andy

DATE

2014.12.24

TITLE:

TYPE C CF 16P单排L6.5沉板0.54/0.8

CHECKED

DATE

1.0/1.3/1.6/1.86/2.1

APPROVED

DATE

REV: 04

SCALE: 1:1

UNIT: mm

PART NO: LCK-TCF801-CXXWL-GX

REV: 04

SCALE: 1:1

UNIT: mm

DRAWING NO: 102022109

REV: 04

SCALE: 1:1







UNIT: mm

SIZE: A4

SHEET: 1/1

RoHS Compliant


0.20±0.05(16X)

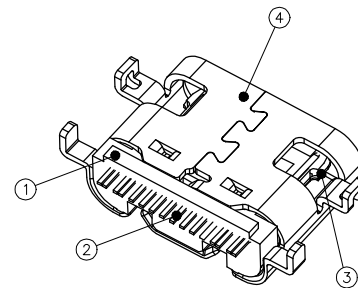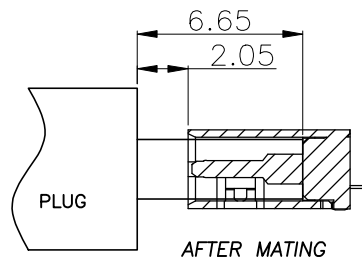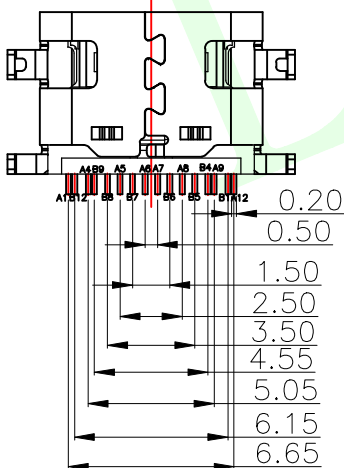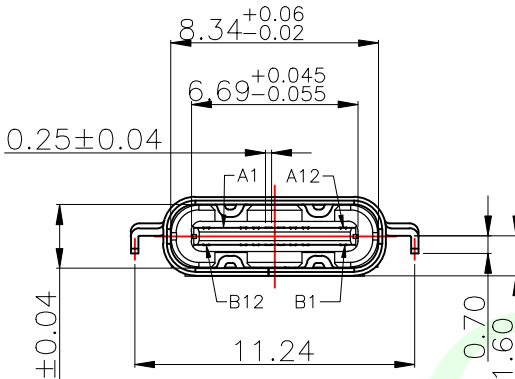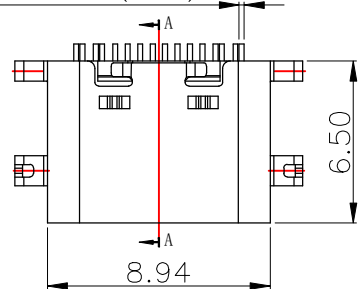

- NOTE:
- 1.MATERIAL SPECIFICATION:
1.HOUSING:PA9T,UL94 V-0.
2.TERMINAL: COPPER ALLOY(C18150)
3.MID PLATE: STAINLESS STEEL(SUS301)
4.FRONT SHELL: STAINLESS STEEL(SUS304)
 - 2.PLATING SPECIFICATION:
2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
2-3.MID PLATE:
CLEAR ONLY
 - 3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
 - 4.ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10ms.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

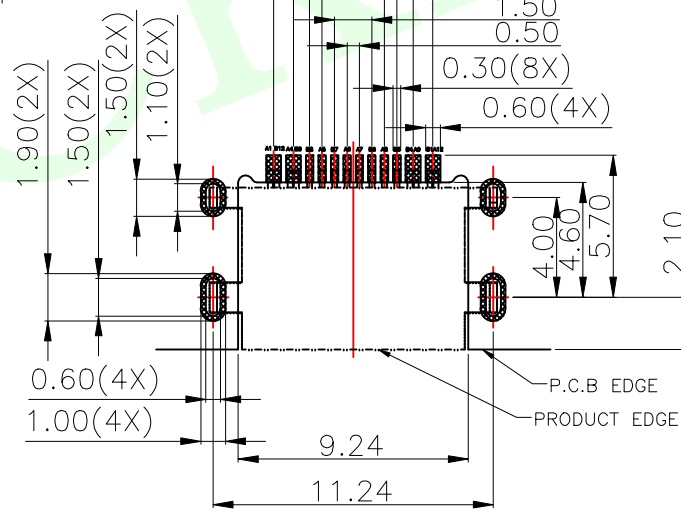

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05






MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)
UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°




联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN: Andy DATE: 2014.12.24 TITLE: TYPE C CF 16P单排L6.5沉板0.54/0.8
CHECKED: DATE: 1.0/1.3/1.6/1.86/2.1
APPROVED: DATE: 1.0/1.3/1.6/1.86/2.1
PART NO: LCK-TCF801-CXXWL-GX REV: 04 SCALE: 1:1 UNIT: mm
DRAWING NO: 102022109 SIZE: A4 SHEET: 1/1


RoHS Compliant

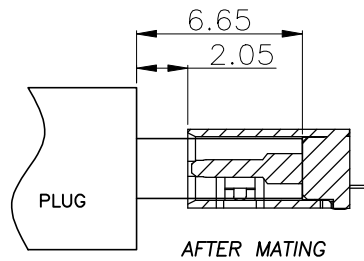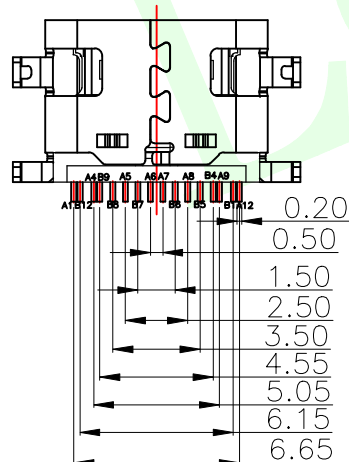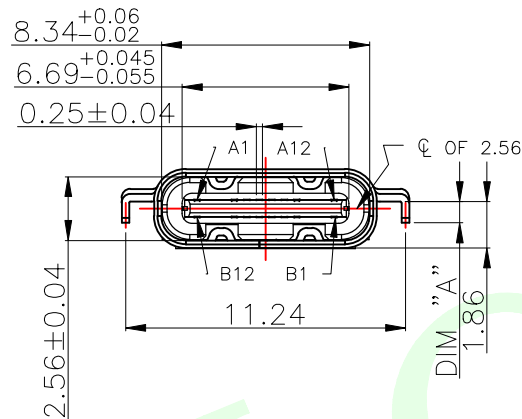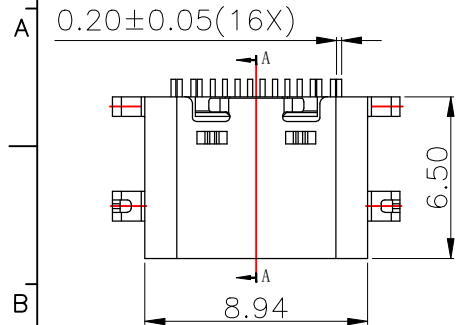

SECTION:A-A

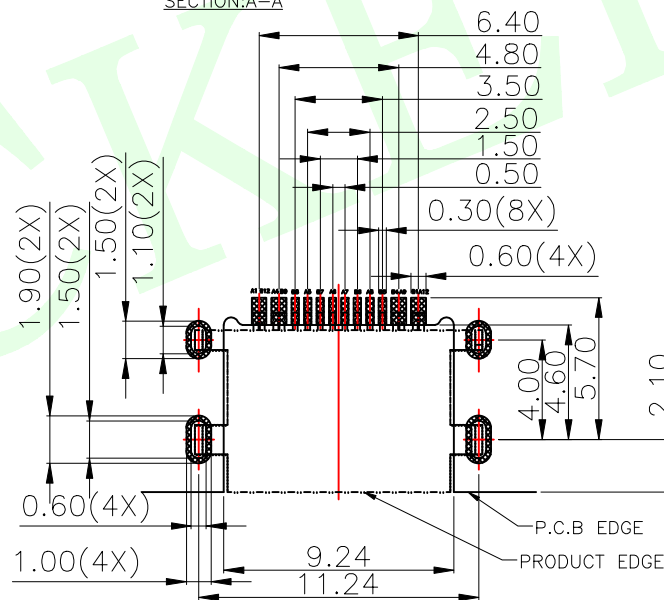

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

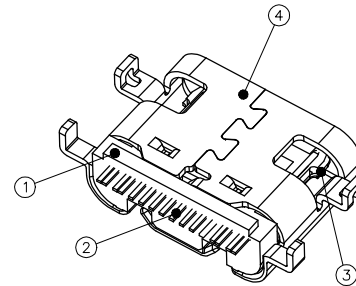

- NOTE:
- 1.MATERIAL SPECIFICATION:
1.1.HOUSING:PA9T,UL94 V-0.
1.2.TERMINAL: COPPER ALLOY(C18150)
1.3.MID PLATE: STAINLESS STEEL(SUS301)
1.4.FRONT SHELL: STAINLESS STEEL(SUS304)
 - 2.PLATING SPECIFICATION:
2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
2-3.MID PLATE:
CLEAR ONLY
 - 3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
 - 4.ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10ms.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)





UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°





联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN: Andy DATE: 2014.12.24 TITLE: TYPE C CF 16P 单排 L6.5 沉板 0.54/0.8
CHECKED: DATE: 1.0/1.3/1.6/1.86/2.1
APPROVED: DATE: 1.0/1.3/1.6/1.86/2.1
PART NO: LCK-TCF801-CXXWL-GX REV: 04 SCALE: 1:1 UNIT: mm
DRAWING NO: 102022109 SIZE: A4 SHEET: 1/1


RoHS Compliant

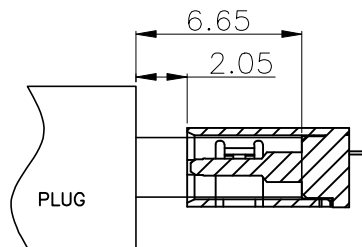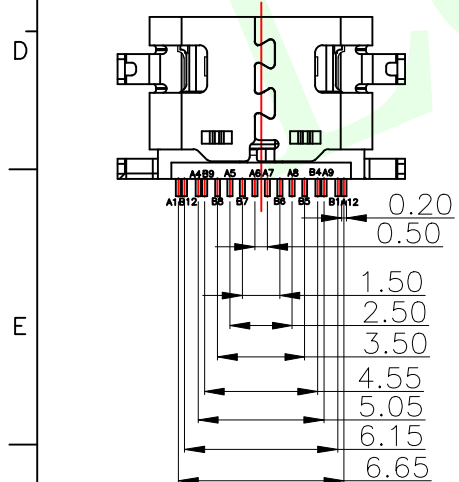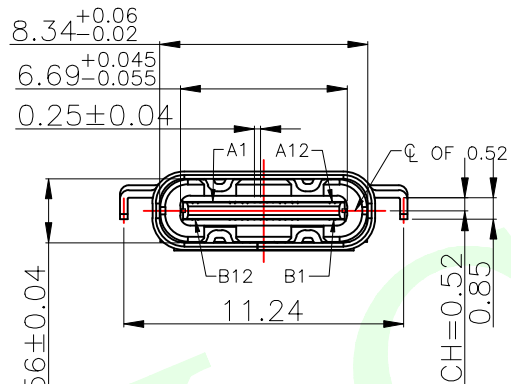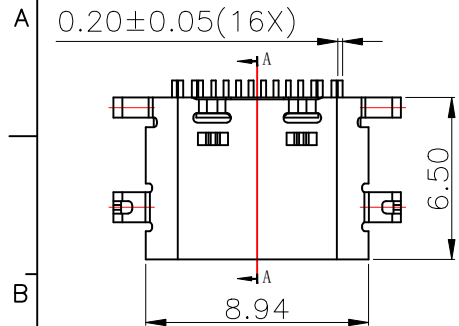

AFTER MATING

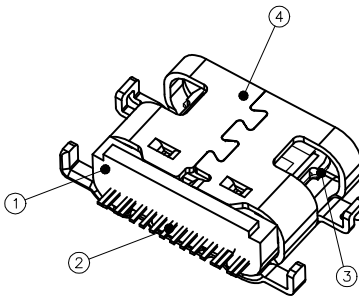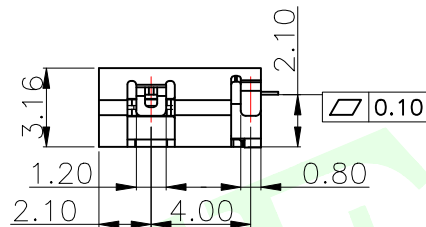

SECTION:A-A

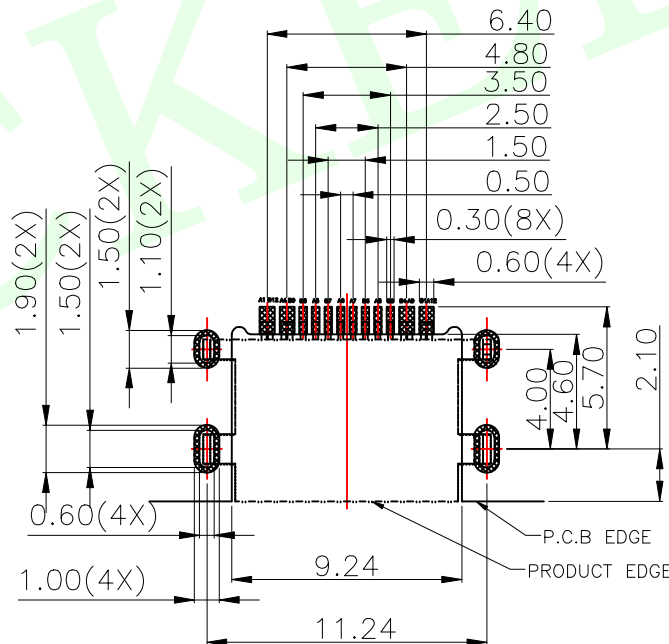

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

- NOTE:
- 1.MATERIAL SPECIFICATION:
1.1.HOUSING:PA9T,UL94 V-0.
1.2.TERMINAL: COPPER ALLOY(C18150)
1.3.MID PLATE: STAINLESS STEEL(SUS301)
1.4.FRONT SHELL: STAINLESS STEEL(SUS304)
 - 2.PLATING SPECIFICATION:
2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
2-2.FRONT SHELL:
PLATING SPECIFICATIONS FOLLOW THE P/N
2-3.MID PLATE:
CLEAR ONLY
 - 3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
 - 4.ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40ms/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10ms.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X. ±0.25
X.X ±0.20
X.XX ±0.15
ANGULAR ±3°








联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:
CHECKED		DATE		TYPE C CF 16P 单排 L6.5 沉板 0.54/0.8
APPROVED		DATE		1.0/1.3/1.6/1.86/2.1
PART NO:	LCK-TCF801-CXXWL-GX	REV:	04	SCALE: 1:1
DRAWING NO:	102022109	SIZE:	A4	SHEET: 1/1

RoHS Compliant

REEL OFF SECTION 1400PCS PULL OUT DIRECTION
(16 POCKETS) (16 POCKETS)

SEE DETAIL X
PEELING DIRECTION
PEELING ANGLE
 $165^{\circ} \sim 180^{\circ}$

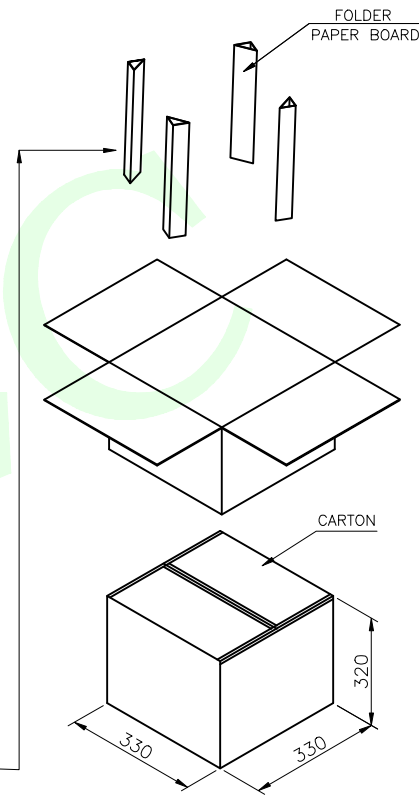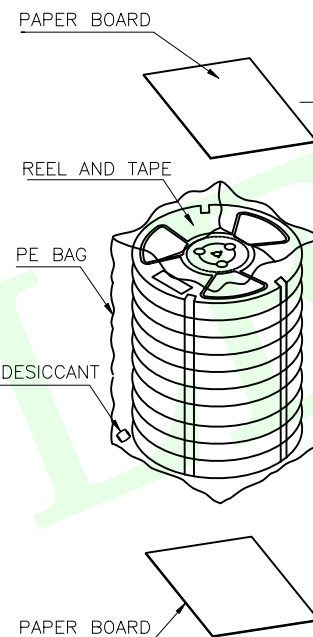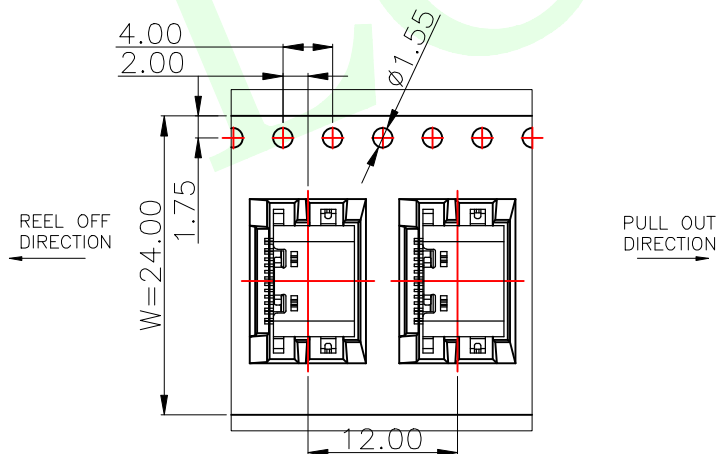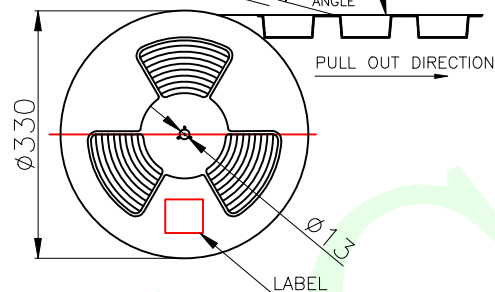

		REEL		CARTON	
CONNECTOR (PCS)		1400		14000	
MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)		 联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd			
UNLESS OTHERWISE SPECIFIED, TOLERANCE:					
X. ±0.25		DESIGN Andy		DATE 2014.12.24	
X.x ±0.20		CHECKED		DATE	
X.xx ±0.15		APPROVED		DATE	
ANGULAR ±3°		PART NO: LCK-TCF801-CXXWL-GX		REV: 04	
		DRAWING NO: 102022109		SCALE: 1:1	
				SIZE: A4	
				SHEET: 1/1	
				UNIT: mm	
					