

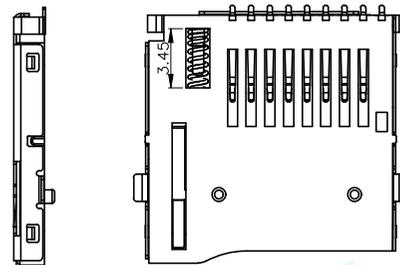
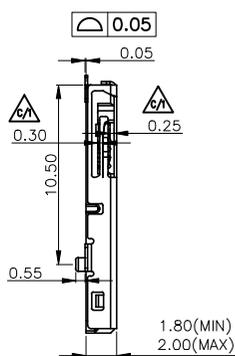
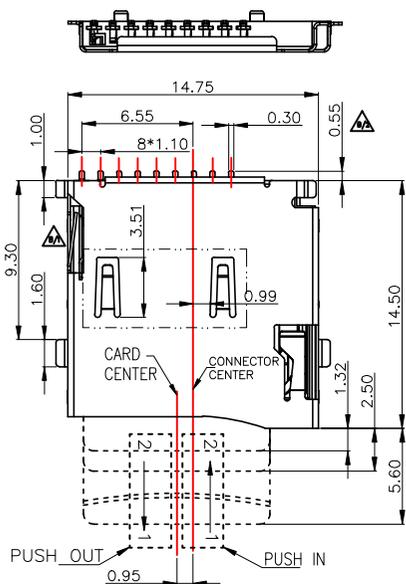
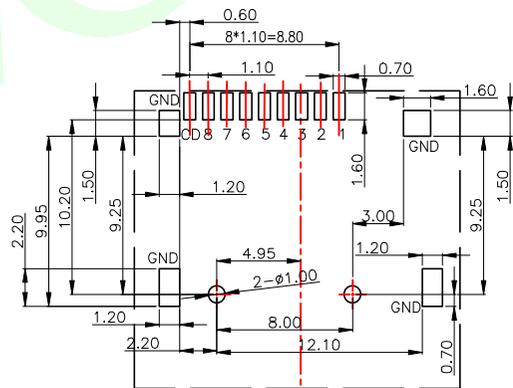
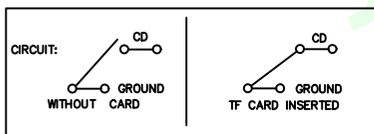
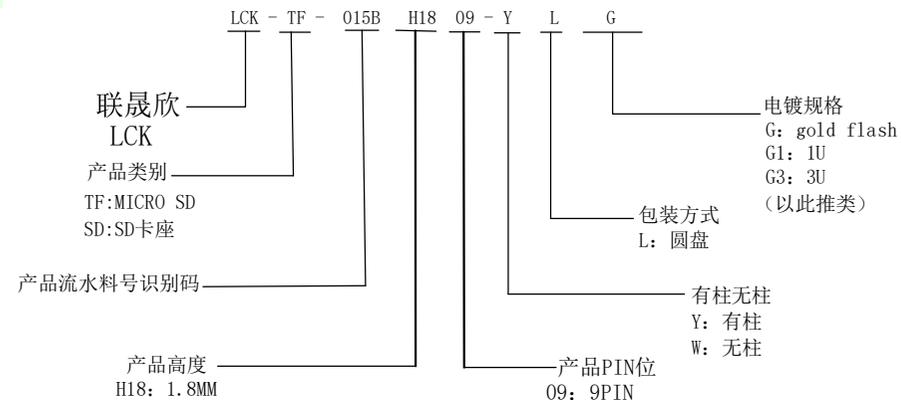


RoHS Compliant

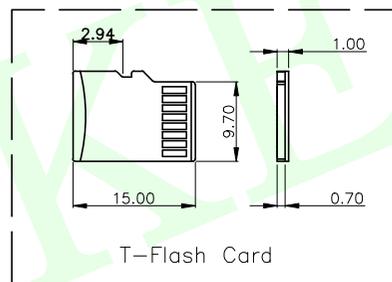

NOTES:
 1.MATERIAL:
 HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0,COLOR:BLACK.
 CONTACT: COPPER ALLOYS.
 COVER: COPPER ALLOYS OR STEEL.
 2.PLATING:
 UNDERPLATE: NICKEL.
 CONTACT AREA: GOLD OVER NICKEL.
 SOLDER AREA: TIN OVER NICKEL.
 3.MULTIMEDIA CARD COMPATIBLE

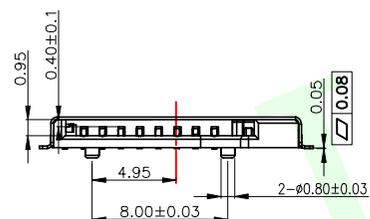

RECOMMENDED P.C.B HOLE LAYOUT COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)
9	CD	CD	CD

MEASURE POINT: QUADRANT POINT (QP)	<p>联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd</p>			
TANGENCY POINT (TP)				
INTERSECTION POINT (IP)	DESIGN: Andy	DATE: 2014.12.24	TITLE: TF PUSH PUSH 9PIN外焊带及压有柱1.8H 镀金	
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	CHECKED:	DATE:	REV: 04	
X: ±0.25	APPROVED:	DATE:	SCALE: 1:1	
X.x: ±0.20	PART NO: LCK-TF-015BH1809-YLG		UNIT: mm	
X.xx: ±0.15	DRAWING NO:		SIZE: A4	
ANGULAR: ±3'	DRAWING NO:		SHEET: 1/1	