
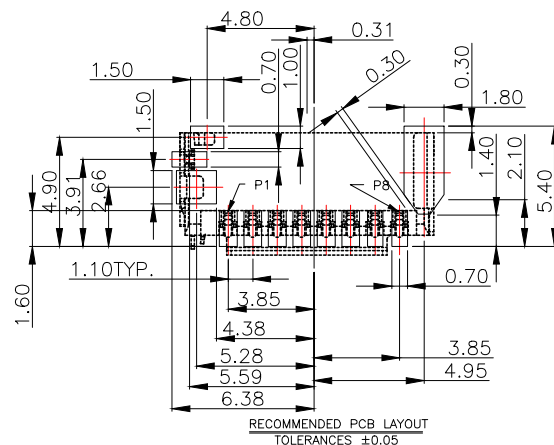
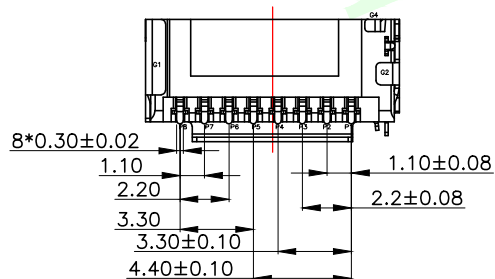
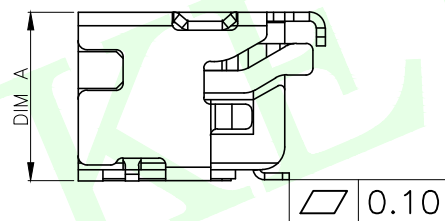
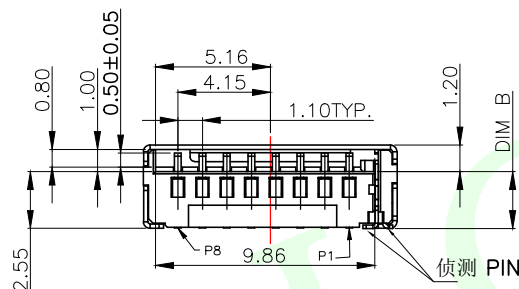
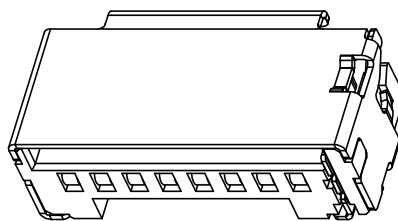


RoHS Compliant

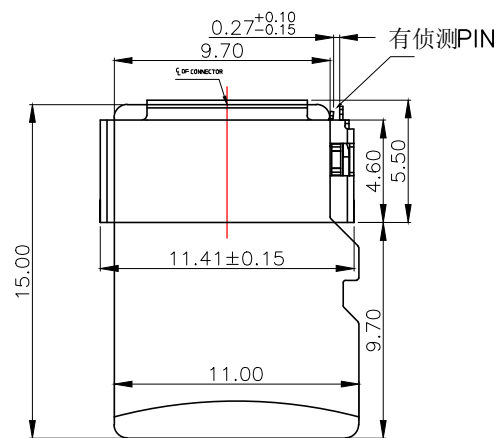

序号	DIM A	DIM B
1	3.0	1.86
2	3.35	2.16
3	3.75	2.56
4	5.20	4.00


Pin No.	NAME
P1	DAT2
P2	CD/DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1

Pin No.	NAME
G1	GND
G2	GND
G3	POL
G4	DET

NOTES

- 1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:500V RMS.
Insulation resistance:1000M ohms min.
- 2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:4.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:1500cycles MIN.
- 3.Environment:
Operating Temperature:-25*to+85*.
- 4.FINISH:
TERMINAL: GOLD Plated Over NICKEL
Contact area,TIN ON
SOLDER TAIL AREA& TIN
Plated ALL Over NICKEL.
Shell: SPCC WITH NICKEL&GOLD Plated.
- 5.COLOR:
HOUSING:BLACK.

产品采购完整示意号: LCK-TF-027H30008-WLG

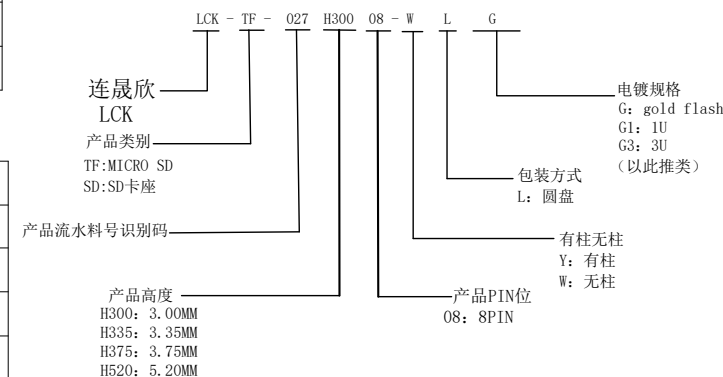

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	T-FLASH 短体卡座3.0-5.20H (有侦测PIN)
CHECKED		DATE			
APPROVED		DATE			
PART NO:	LCK-TF-027HXXX08-WLG	REV:	04	SCALE:	1:1
DRAWING NO:	102022027	SIZE:	A4	SHEET:	1/1