


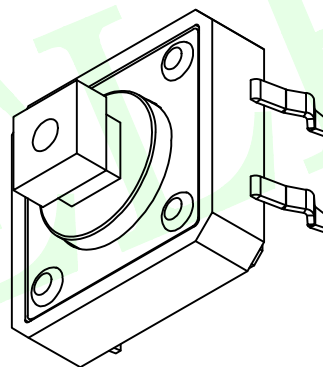
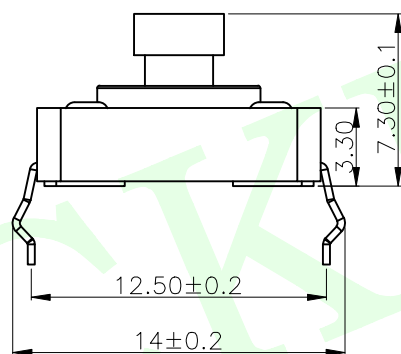
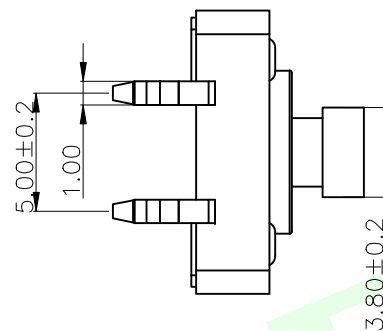
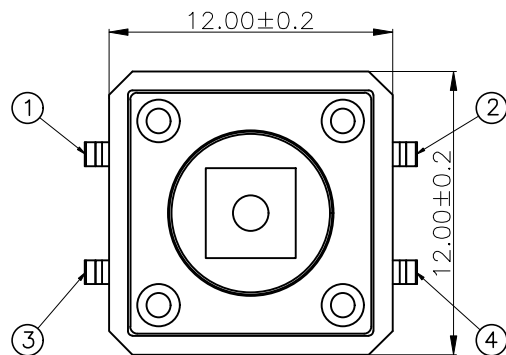


RoHS Compliant

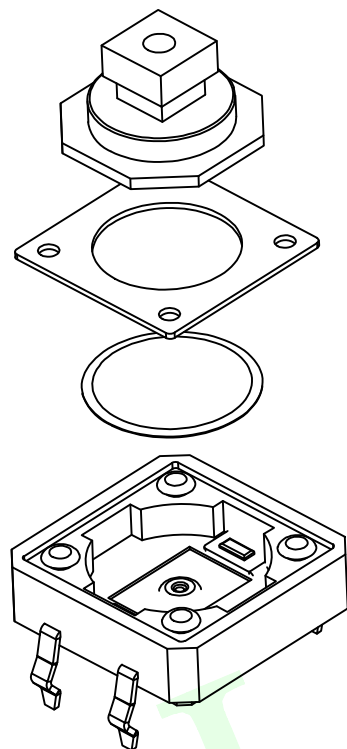


电路图

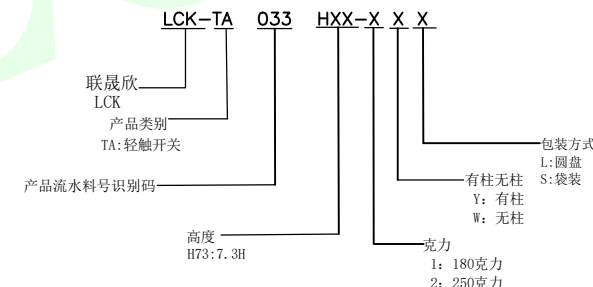

主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: $\leq 50\text{m}\Omega$
- 操作力: $250 \pm 40\text{gf}$
- 行程: $0.35 \pm 0.1\text{mm}$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles

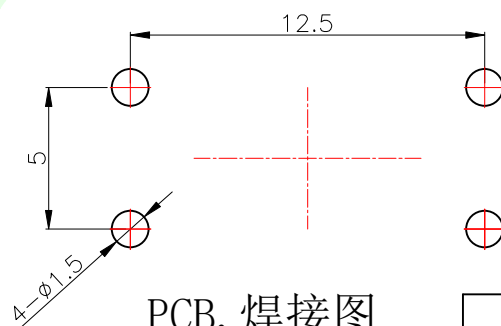

PCB. 焊接图

6	帽头	PPA	1	耐温280℃
5	引脚、触点	黄铜	1	镀银
4	底座	PPA	1	耐温280℃ (黑色)
3	簧片	不锈钢	1	覆银
2	盖板	铜&冷轧钢	1	镀锡
1	按钮	PPA	1	耐温280℃
序号	零件名称	材料规格	数量	备注

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	TACRILE SWITCH			
CHECKED		DATE		REV: 04	SCALE: 1:1	UNIT: mm		
APPROVED		DATE		PART NO: LCK-TA033HXXX-XXX	REV: 04	SCALE: 1:1	UNIT: mm	
DRAWING NO:				SIZE: A4	SHEET: 1/1			