



1  
2  
3  
4  
5  
6  
7  
RoHS Compliant

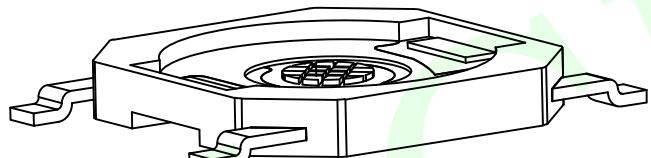

### 主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻:  $\leq 50m\Omega$
- 操作力:  $160\pm 30\text{gf} \& 250\pm 50\text{gf}$
- 行程:  $0.20\pm 0.1\text{mm}$
- 绝缘电阻:  $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles

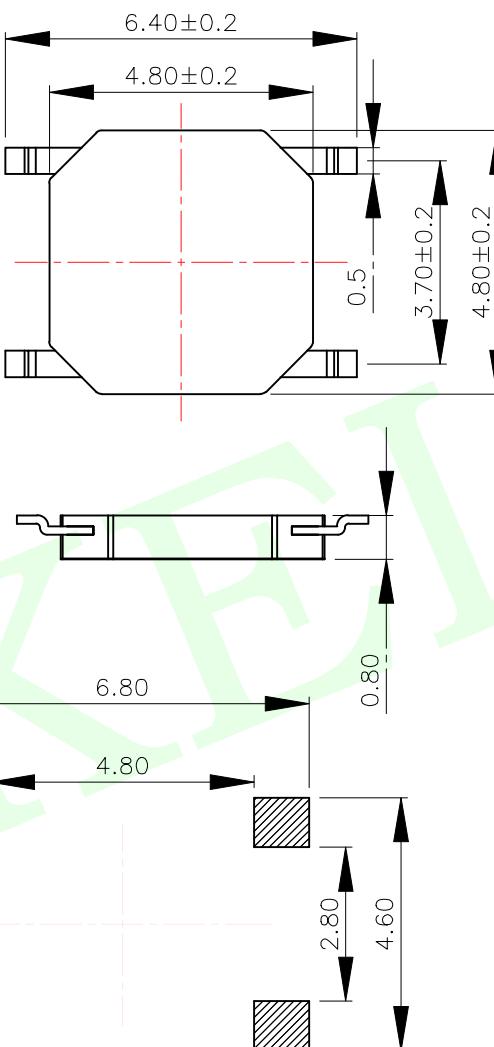


PCB. 焊接图

QUADRANT POINT  
TANGENCY POINT  
INTERSECTION POINT


UNLESS OTHERWISE  
SPECIFIED, TOLERANCE:  
X.  $\pm 0.25$   
X.x  $\pm 0.20$   
X.xx  $\pm 0.15$   
ANGULAR  $\pm 3^\circ$

联晟欣连接器(深圳)有限公司  
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	
CHECKED		DATE		TACRILE SWITCH	
APPROVED		DATE		REV:	04
PART NO: LCK-TA023HXX-XXX		SCALE:	1:1	UNIT:	mm
DRAWING NO:		SIZE:	A4	SHEET:	1/1



电 路 图

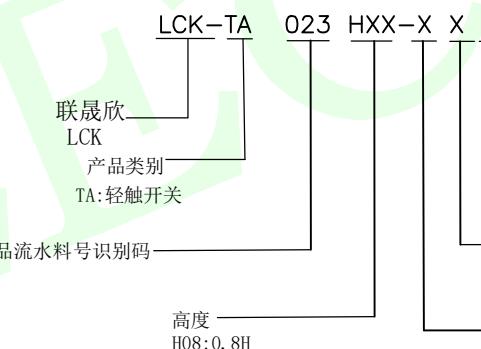

序号	零件名称	材料规格	数量	备注
5	引脚、触点	黄铜	1	镀银
4	基座	LCP	1	耐温280℃ (黑色)
3	簧片	不锈钢	1	覆银
1	防尘膜	PI	1	耐温280℃ (黄色)