





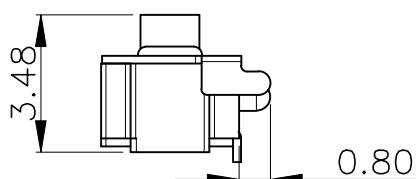


RoHS Compliant

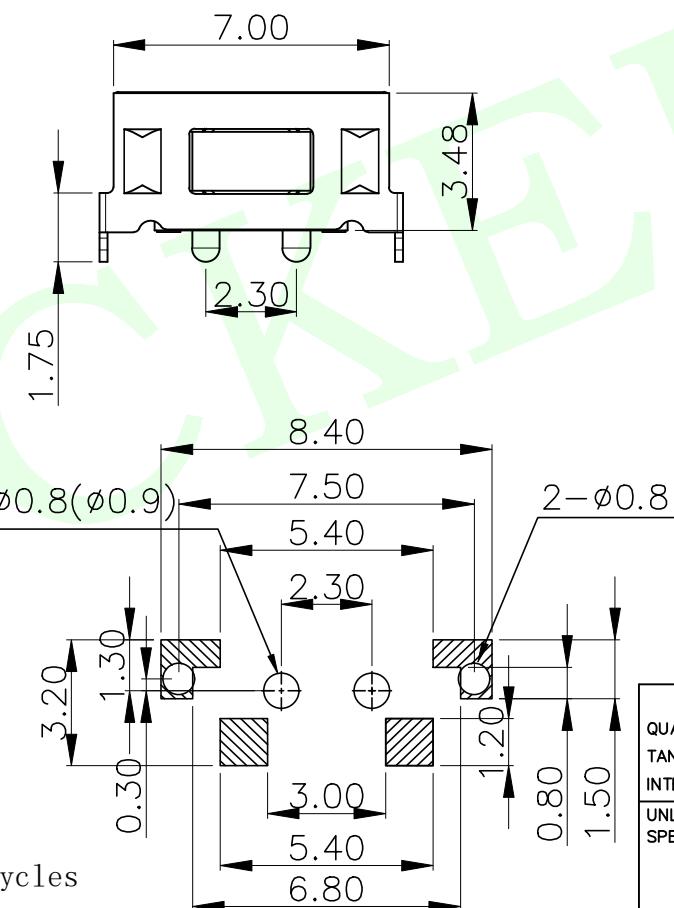

主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: $\leq 50\text{m}\Omega$
- 操作力: $180/250 \pm 40\text{gf}$
- 行程: $0.20 \pm 0.1\text{mm}$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 30,000&100000 Cycles

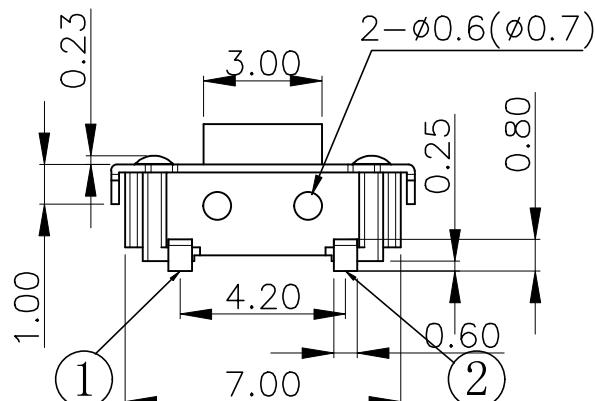

H
3.5
3.8
4.0
4.3

QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT
UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$

DESIGN	Andy	DATE	2014.12.24	TITLE:
CHECKED		DATE		
APPROVED		DATE		
PART NO: LCK-TA016AHXXX-XXX				REV: 04 SCALE: 1:1 UNIT: mm
DRAWING NO:				SIZE: A4 SHEET: 1/1



联晟欣连接器(深圳)有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

电路图



LCK-TA

016A

HXX-X

X X

产品流水料号识别码

联晟欣

LCK

产品类别

TA:轻触开关

高度

H35:3.5H

H38:3.8H

H40:4.0H

H43:4.3H

包装方式

L:圆盘

S:袋装

克力

1: 180克力

2: 250克力

序号	零件名称	材料规格	数量	备注
5	引脚、触点	黄铜	1	镀银
4	基座	LCP	1	耐温280℃(白色)
3	簧片	不锈钢	1	覆银
2	盖板	黄铜	1	镀锡
1	按钮	LCP	1	耐温280℃
序号	零件名称	材料规格	数量	备注