




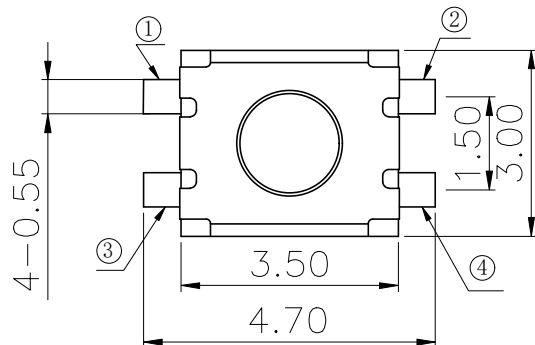


RoHS Compliant

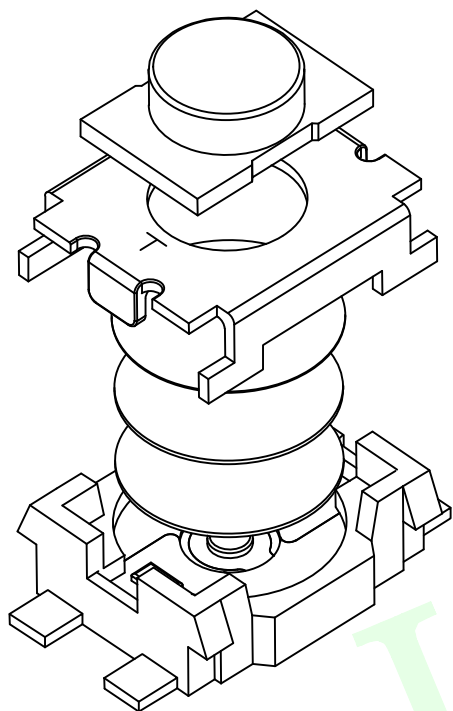

电路图

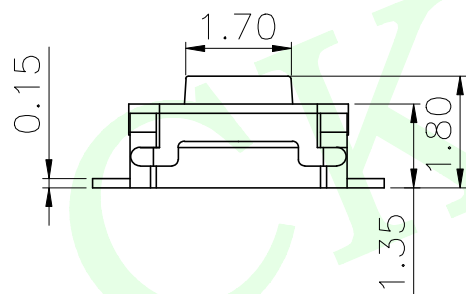


H
1.8
2.0
2.5

LCK-TA	044	HXX-X	X	X
联晟欣 LCK	产品类别 TA:轻触开关	产品流水料号识别码	高度 H18:1.8H H20:2.0H H25:2.5H	包装方式 L:圆盘 S:袋装 有柱无柱 Y:有柱 W:无柱 克力 1: 180克力 2: 250克力

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 100\text{m}\Omega$
3. 操作力: $180 \pm 30\text{gf}$
4. 行程: $0.25 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 50,000 Cycles

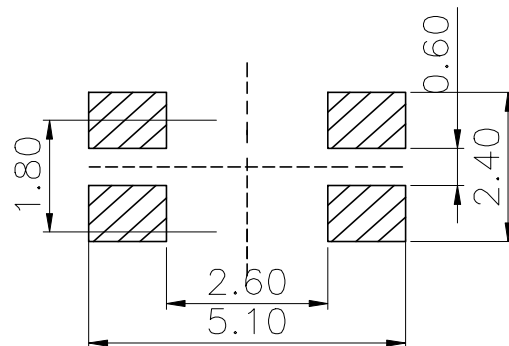

PCB. 焊接图

5	按钮	LCP	1	耐温280℃ (黑色)
4	基座	LCP	1	耐温280℃ (黑色)
3	弹片	不锈钢	2	镀银
2	防尘膜	PI	1	耐温280° C(黄色)
1	盖板	不锈钢	1	/
序号	零件名称	材料规格	数量	备注

QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$

DESIGN	Andy	DATE	2014.12.24
CHECKED		DATE	
APPROVED		DATE	
PART NO:	LCK-TA044HXXX-XXXX	REV:	04
DRAWING NO:		SCALE:	1:1

TITLE:	TACRILE SWITCH		
REV:	04	SCALE:	1:1
SIZE:	A4	SHEET:	1/1
UNIT:	mm		