


RoHS Compliant

1 2 3 4 5 6 7


A




主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: $\leq 100m\Omega$
- 操作力: $160\&250\pm40gf$
- 行程: $0.20\pm0.1mm$
- 绝缘电阻: $\geq 100M\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles


PCB. 焊接图

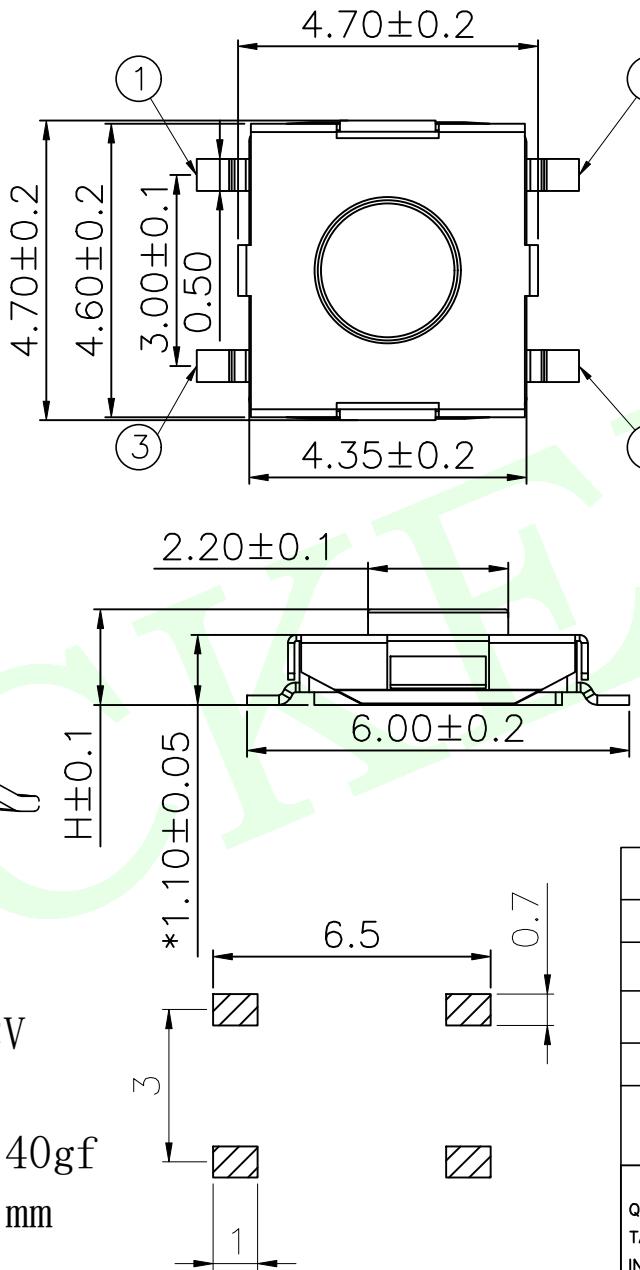

H	
1.5	2.0
2.5	

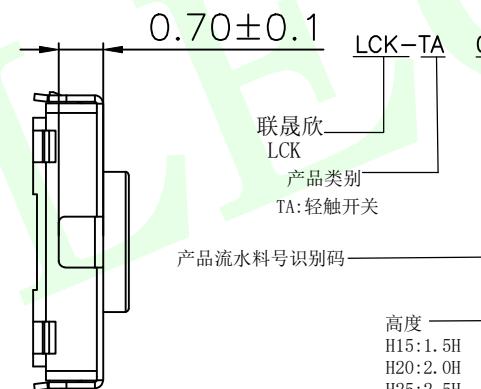

电路图



包装方式
L:圆盘
S:袋装

有柱无柱
Y: 有柱
W: 无柱

克力
1: 180克力
2: 250克力

联晟欣
LCK
产品类别
TA:轻触开关
产品流水料号识别码

高度
H15:1.5H
H20:2.0H
H25:2.5H

序号	零件名称	材料规格	数量	备注
5	引脚、触点	磷铜	1	镀银
4	基座	PPA	1	耐温280°C (黑色)
3	弹片	不锈钢	1	镀银
2	盖板	不锈钢	1	
1	按钮	LCP	1	

QUADRANT POINT TP INTERSECTION POINT IP	设计 Andy	日期 DATE	2014.12.24	标题 TITLE: TACRILE SWITCH
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ± 0.25				
X.X ± 0.20				
X.XX ± 0.15				
ANGULAR $\pm 3^\circ$				
PART NO: LCK-TA050HXX-XXXX				REV: 04 SCALE: 1:1 UNIT: mm
DRAWING NO:				SIZE: A4 SHEET: 1/1

联晟欣连接器(深圳)有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd