
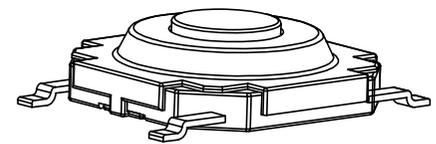
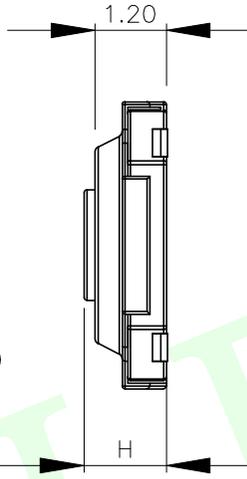
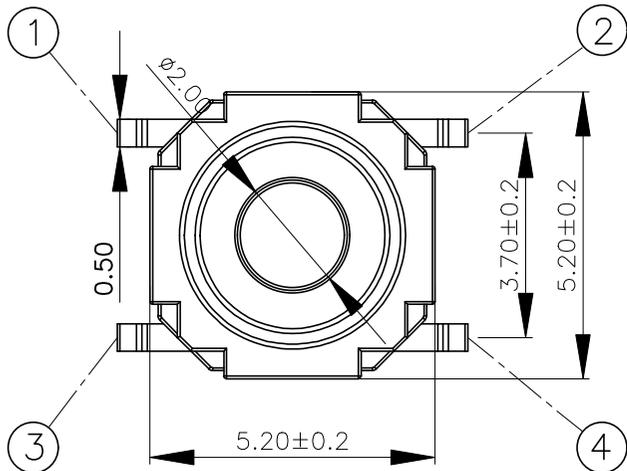


RoHS Compliant

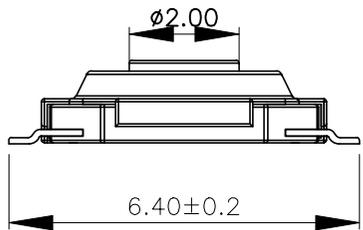

LCK-TA O22 HXX-X X X

联晟欣
LCK
产品类别
TA:轻触开关


产品流水料号识别码

包装方式
L:圆盘
S:袋装

有柱无柱
Y:有柱
W:无柱

高度
H15:1.5H
H16:1.6H
H17:1.7H
H18:1.8H
.....
H50:5.0H

克力
1: 180克力
2: 250克力




电路图

H	
1.5	1.6
1.7	1.8
1.9	2.0
2.5	3.0
3.5	3.7
4.0	4.3
4.5	5.0

5	引脚、触点	磷铜	1	镀银
4	基座	LCP	1	耐温280℃ (白色)
3	簧片	不锈钢	1	覆银
2	盖板	磷铜	1	镀银
1	按钮	LCP	1	耐温280℃ (白色)
序号	零件名称	材料规格	数量	备注

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $180 \pm 30gf$
4. 行程: $0.20 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 1000,000 Cycles

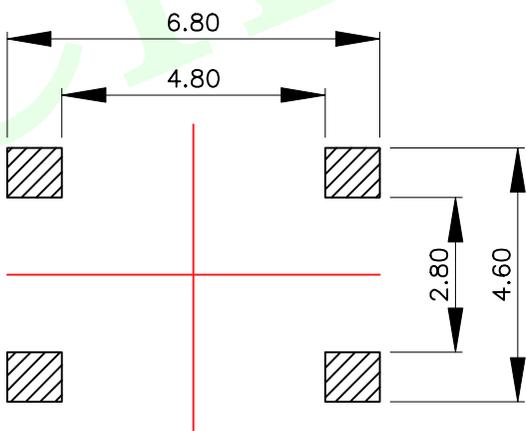

PCB. 焊接图

QUADRANT POINT (QP)	联晟欣连接器 (深圳) 有限公司			
TANGENCY POINT (TP)	Lianshengxin Connector (Shenzhen) Co., Ltd			
INTERSECTION POINT (IP)				
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	DESIGN	Andy	DATE	2014.12.24
X. ±0.25	CHECKED		DATE	
X.x ±0.20	APPROVED		DATE	
X.xx ±0.15	PART NO: LCK-TA022HXXX-XXX		REV: 04	SCALE: 1:1
ANGULAR ±3'	DRAWING NO:		UNIT: mm	
			SHEET: 1/1	

TACRILE SWITCH