

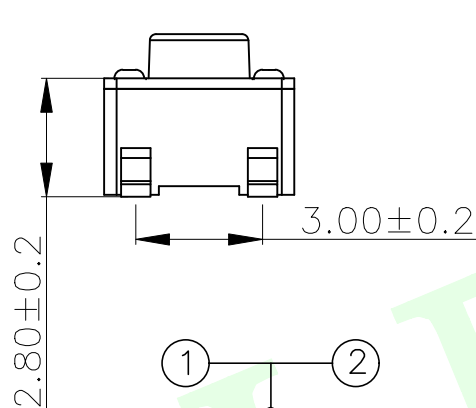
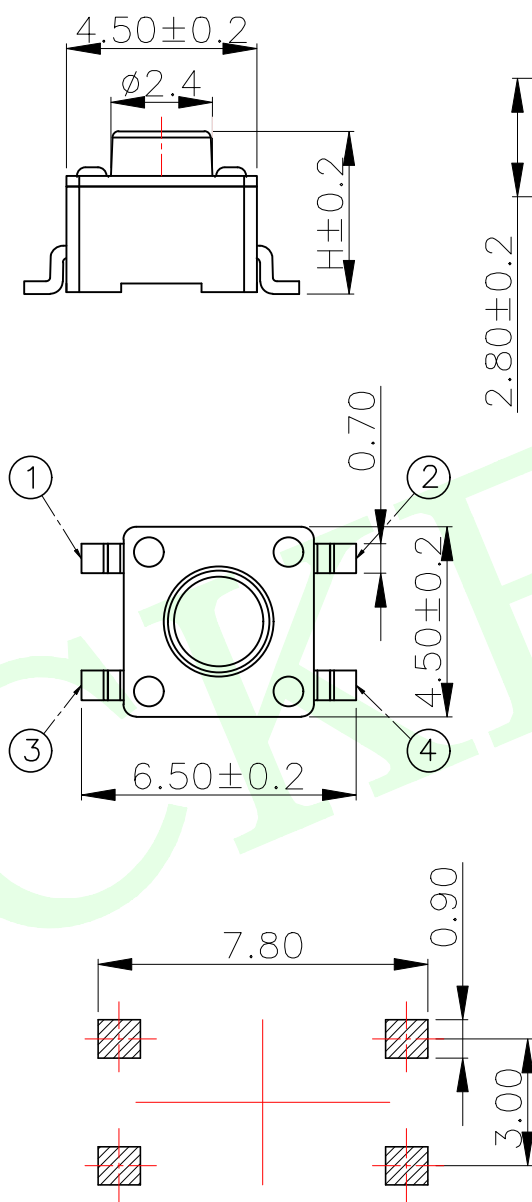


RoHS Compliant

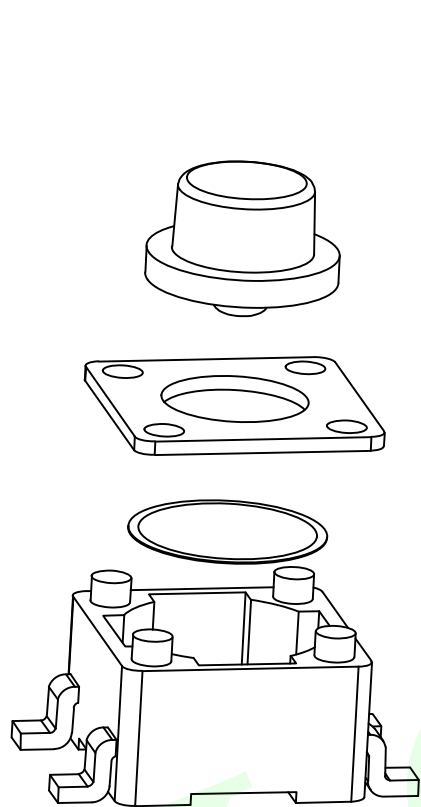

电路图

联晟欣
LCK
产品类别
TA:轻触开关

产品流水料号识别码

LCK-TA 009 HXX-X X X

包装方式
L:圆盘
S:袋装

有柱无柱
Y:有柱
W:无柱

克力
1: 180克力
2: 250克力

高度
H35:3.5H
H38:3.8H
H40:4.0H
.....
H100:10.0H

H	
3.5	3.8
4.0	4.3
4.5	4.8
5.0	6.0
7.0	8.0
9.0	10.0

序号	部件名称	材料	备 注
1	底座	PPA	耐温280℃（黑色）
2	嵌件	黄铜	镀银
3	簧片	不锈钢	覆银
4	按钮	PPA	耐温280℃（黑色）
5	盖板	冷轧钢	镀锡

主要技术规格:

- 额 定 值: 50mA DC12V
- 接触电阻: $\leq 50m\Omega$
- 操 作 力: $250\pm 40gf$
- 行 程: $0.25\pm 0.1mm$
- 绝缘电阻: $\geq 100M\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿 命: 30,000 Cycles

PCB. 焊接图

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
ANGULAR $\pm 3^\circ$



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE: TACRILE SWITCH			
CHECKED		DATE					
APPROVED		DATE					
PART NO: LCK-TA009HXXX-XXX				REV: 04	SCALE: 1:1	UNIT: mm	
DRAWING NO:				SIZE: A4	SHEET: 1/1	 	